



Emulated Virtual Environment
Next Generation

EVE-NG Community Cookbook

Version 5.4

Author:
Uldis Dzerkals

Editors:
Michael Doe
Christopher Lim

© EVE-NG LTD

The information contained in this document is the property of EVE-NG Limited

The contents of the document must not be reproduced or disclosed wholly or in part or used for purposes other than that for which it is supplied without the prior written permission of EVE-NG Limited.

Table of Contents

PREFACE	7
1 INTRODUCTION	8
1.1 WHAT IS EVE-NG?	8
1.2 WHAT IS EVE-NG USED FOR?	8
1.3 WHO IS EVE-NG FOR?	8
2 SYSTEM REQUIREMENTS	9
2.1 HARDWARE REQUIREMENTS	9
2.1.1 <i>Minimal Laptop/PC Desktop system requirements</i>	9
2.1.2 <i>Recommended Laptop/PC Desktop system requirements</i>	10
2.1.3 <i>Virtual Server system requirements</i>	10
2.1.4 <i>Dedicated Server (bare) system requirements</i>	11
2.1.5 <i>Nodes per lab calculator</i>	11
2.2 SUPPORTED VIRTUALIZATION PLATFORMS AND SOFTWARE	11
2.3 UNSUPPORTED HARDWARE AND SYSTEMS	11
3 INSTALLATION	13
3.1 VMWARE WORKSTATION OR VM PLAYER	13
3.1.1 <i>VMware workstation EVE VM installation using ISO image (preferred)</i>	13
3.1.1.1 EVE VM Setup and Settings	13
3.1.1.2 EVE-NG VM Installation steps	17
3.1.2 <i>VMware workstation OVF deployment</i>	21
3.1.2.1 Deployment and VM machine settings	22
3.1.2.2 OVF VM update to the latest EVE version	23
3.1.2.3 OVF VM HDD Size expansion	24
3.2 VMWARE ESXi	24
3.2.1 <i>VMware ESXi EVE installation using ISO image (preferred)</i>	24
3.2.1.1 EVE-NG ESXi VM Setup and Settings	24
3.2.1.2 EVE-NG ESXi VM Installation steps	26
3.2.2 <i>VMware ESXi OVF deployment</i>	30
3.2.2.1 ESXi OVF VM Setup and Settings	31
3.2.2.2 ESXi OVF VM update to the latest EVE version	32
3.2.2.3 ESXi OVF VM HDD Size expansion	32
3.3 BARE HARDWARE SERVER EVE INSTALLATION	32
3.3.1 <i>BM Server Installation EVE ISO</i>	32
3.3.2 <i>BM Server Installation Ubuntu Legacy ISO</i>	37
3.4 GOOGLE CLOUD PLATFORM	44
3.4.1 <i>Google account</i>	44
3.4.2 <i>Goggle Cloud project</i>	44
3.4.3 <i>Preparing Ubuntu boot disk template</i>	45
3.4.4 <i>Creating VM</i>	46
3.4.5 <i>EVE-NG-Community installation</i>	49
3.4.6 <i>Access to Google Cloud EVE-COMM</i>	50
3.4.7 <i>Optional: GCP Firewall rules for native console use</i>	50
3.5 EVE MANAGEMENT IP ADDRESS SETUP	53
3.5.1 <i>Management static IP address setup (preferred)</i>	53
3.5.2 <i>EVE Management IP address setup via DHCP</i>	56
3.5.3 <i>EVE Management IP address reset</i>	57
3.6 EVE-NG COMMUNITY UPGRADE TO EVE-NG PROFESSIONAL	58
3.6.1 <i>Mandatory Prerequisites</i>	58
3.6.1.1 EVE Community disk space	58
3.6.1.2 Verify current EVE Community version	58
3.6.1.3 Steps to upgrade to the latest EVE Community version	59
3.6.2 <i>Upgrading EVE Community to EVE-NG Professional</i>	59

3.7	NATIVE TELNET CONSOLE MANAGEMENT SETUP	60
3.7.1	<i>Windows Native Console</i>	60
3.7.2	<i>Linux Native Console</i>	61
3.7.3	<i>MAC OSX Native Console</i>	62
3.8	LOGIN TO THE EVE WEB GUI	64
4	EVE-NG COMMUNITY UPDATE & UPGRADE	65
4.1	EVE-NG COMMUNITY UPDATE	65
4.2	EVE-NG COMMUNITY UPGRADE	66
5	TYPES OF EVE MANAGEMENT CONSOLES	68
5.1	NATIVE CONSOLE	68
5.1.1	<i>Native Console: telnet</i>	68
5.1.2	<i>Native Console: Wireshark</i>	69
5.1.3	<i>Native Console: VNC</i>	71
5.1.4	<i>Native Console: RDP</i>	71
5.2	HTML5 CONSOLE	72
5.2.1	<i>HTML5 Console: Telnet</i>	73
5.2.2	<i>HTML5 Console: VNC</i>	73
5.2.3	<i>HTML5 Console: RDP for Windows</i>	74
6	EVE WEB GUI MANAGEMENT	76
6.1	EVE MANAGEMENT PAGE	76
6.1.1	<i>Management buttons</i>	76
6.1.2	<i>Management tabs</i>	77
6.2	FOLDERS AND LAB FILES MANAGEMENT	78
6.2.1	<i>Folders Management</i>	78
6.2.1.1	Create folder	78
6.2.1.2	Delete folder	78
6.2.1.3	Move Folder	78
6.2.1.4	Export Folder	78
6.2.1.5	Import Folder	79
6.2.2	<i>Lab files Management</i>	80
6.2.2.1	Create Lab	80
6.2.2.2	Delete Lab	80
6.2.2.3	Clone Lab	81
6.2.2.4	Move Lab	81
6.2.2.5	Export Lab	82
6.2.2.6	Import Labs	82
6.3	EVE MANAGEMENT DROPDOWN MENU	83
6.3.1	<i>EVE User management</i>	83
6.3.1.1	Creating a new EVE User	84
6.3.1.2	Edit EVE User	84
6.3.1.3	User monitoring	85
6.4	EVE SYSTEM DROPDOWN MENU	85
6.4.1	<i>System status</i>	85
6.4.2	<i>System logs</i>	86
6.4.3	<i>Stop All Nodes</i>	87
6.5	EVE INFORMATION DROPDOWN MENU	87
6.6	OTHER TAB LINE INFO	87
6.7	LAB PREVIEW AND GLOBAL SETTINGS	87
6.7.1	<i>Lab preview window</i>	88
6.7.2	<i>Lab preview buttons</i>	88
6.7.3	<i>Lab preview information</i>	88
6.7.4	<i>Lab Global Settings</i>	89
7	EVE WEB TOPOLOGY PAGE	91
7.1	SIDE BAR FUNCTIONS	91
7.1.1	<i>Add an object</i>	92

7.1.1.1	Node object.....	92
7.1.1.2	Network object	92
7.1.1.3	Picture object	93
7.1.1.4	Custom shape object.....	93
7.1.1.5	Text object	93
7.1.2	<i>Nodes</i>	94
7.1.3	<i>Networks</i>	95
7.1.4	<i>Startup-configs</i>	96
7.1.5	<i>Logical Maps</i>	96
7.1.6	<i>Configured Objects</i>	96
7.1.7	<i>More actions</i>	97
7.1.7.1	Start all nodes	97
7.1.7.2	Stop all nodes.....	97
7.1.7.3	Wipe all nodes.....	97
7.1.7.4	Console to All Nodes	98
7.1.7.5	Export all CFGs	98
7.1.7.6	Edit lab	98
7.1.7.7	Set node's startup-cfg to default configset	98
7.1.7.8	Set node's startup-cfg to none.....	99
7.1.7.9	Delete default startup-cfgs	99
7.1.8	<i>Refresh Topology</i>	99
7.1.9	<i>Lab page zoom/unzoom</i>	99
7.1.10	<i>Status</i>	99
7.1.11	<i>Lab details</i>	100
7.1.12	<i>Lock Lab</i>	100
7.1.13	<i>Dark mode or Light mode</i>	100
7.1.14	<i>Close lab</i>	101
7.1.15	<i>Logout</i>	101
7.2	EVE LAB TOPOLOGY MENUS	101
7.2.1	<i>Lab topology menu</i>	101
7.2.2	<i>Connection menu</i>	101
7.2.3	<i>Cloud or Bridge network menu</i>	101
7.2.4	<i>Stopped node menu</i>	102
7.2.5	<i>Running node menu</i>	103
7.2.6	<i>Selected nodes menu and features</i>	103
7.3	EVE LAB NODE STATES AND SYMBOLS	107
7.3.1	<i>Stopped (non-running) nodes</i>	107
7.3.2	<i>Running nodes</i>	107
7.3.3	<i>Node connector symbol</i>	107
7.4	OTHER.....	108
7.4.1	<i>Notifications area</i>	108
8	WORKING WITH EVE LABS	109
8.1	CREATING A LAB	109
8.1.1	<i>Adding nodes to the lab</i>	109
8.1.1.1	Node values Table	111
8.1.2	<i>Edit node</i>	114
8.1.2.1	Edit nodes globally	114
8.1.2.2	Edit node individually	115
8.1.3	<i>Wipe Node</i>	116
8.1.4	<i>Interconnecting nodes</i>	116
8.1.5	<i>Delete connection between nodes</i>	116
8.1.6	<i>Delete Node</i>	117
8.2	RUNNING LABS	117
8.2.1	<i>Starting lab</i>	117
8.3	SAVING LABS.....	117
8.4	STOPPING LABS.....	118
8.5	START SAVED LAB.....	118
8.6	IMPORTING LABS.....	118

8.7	EXPORTING LABS.....	118
8.8	DELETING LABS	118
8.9	MOVING LABS.....	119
9	EVE CLOUDS AND NETWORKS	120
9.1	BRIDGE NETWORK.....	120
9.2	MANAGEMENT CLOUD0 INTERFACE	121
9.3	OTHER CLOUD INTERFACES.....	123
9.4	CONNECTING EXTERNAL VM MACHINES TO THE EVE LAB.....	125
9.4.1	ESXi VM machines	125
9.4.2	VMWare workstation machines	127
9.5	CONNECTING EVE LAB TO A PHYSICAL DEVICE	129
9.5.1	ESXi EVE.....	129
9.5.2	VMWare workstation EVE	131
9.5.3	Bare metal server EVE	133
10	ADVANCED EVE LAB FEATURES	134
10.1	LAB DESIGN OBJECTS.....	134
10.1.1	Custom shape.....	134
10.1.2	Resize square or circle objects.....	135
10.1.3	Text object	135
10.1.4	Add custom picture on the Lab using Text object feature	136
10.1.5	Cloning objects and overlay positions	137
10.1.6	Objects Editing.....	137
10.1.7	Lock objects movement.....	138
10.2	CUSTOM DESIGN LOGICAL TOPOLOGY	138
10.2.1	Custom design upload.....	138
10.2.2	Custom topology mapping	139
10.2.3	Delete topology or mapping.....	140
10.3	CONFIGURATION EXPORT FEATURE	141
10.3.1	Supported nodes for configuration exports.....	142
10.3.2	Startup config management.....	142
10.3.2.1	Global commands	142
10.3.2.2	Individual node commands.....	142
10.3.2.3	Multiple selected nodes commands.....	143
10.3.2.4	Startup-configuration window.....	143
10.3.2.5	Startup-config window information	144
10.3.3	Export configuration.....	144
10.3.4	Boot nodes from exported config set.....	145
10.3.5	Edit exported configurations	145
10.3.6	Set lab to boot from none	146
10.3.7	Lab config script timeout.....	146
11	EVE TROUBLESHOOTING	148
11.1	CLI DIAGNOSTIC INFORMATION DISPLAY COMMANDS	148
11.1.1	Display full EVE Community diagnostic.....	148
11.1.2	Display the currently installed EVE Community version:.....	148
11.1.3	Display if EVEs Intel VT-x/EPT option on/off:.....	148
11.1.4	Display EVEs CPU INFO:.....	148
11.1.5	Display EVEs HDD utilization.	148
11.1.6	Display EVEs Bridge interface status	149
11.1.7	Display EVEs system services status.....	149
11.2	EXPAND EVEs SYSTEM HDD.....	149
11.2.1	Expand HDD on VMware Workstation.....	149
11.2.2	Expand your HDD on ESXi.....	150
11.2.3	Expand your HDD on a Bare Metal EVE Server	150
11.3	RESET MANAGEMENT IP	151
11.4	EVE COMMUNITY SQL DATABASE RECOVERY	151

11.5	EVE LOG FILES	151
11.6	EVE CLI DIAGNOSTIC INFO.....	151
12	IMAGES FOR EVE.....	152
12.1	QEMU IMAGE NAMING TABLE	152
12.2	HOW TO PREPARE IMAGES FOR EVE.....	153
12.3	HOW TO ADD CUSTOM IMAGE TEMPLATE	153
12.3.1	<i>Templates folder choice.....</i>	153
12.3.2	<i>Prepare template file.....</i>	153
12.3.3	<i>Prepare interface format and name lines.....</i>	154
12.3.4	<i>Edit your new template file:.....</i>	155
12.3.5	<i>Prepare new icon for your template:.....</i>	156
12.3.6	<i>Template use</i>	157
12.4	HOW TO HIDE UNUSED IMAGES IN THE NODE LIST	157
12.4.1	<i>Creating new config.php file</i>	157
12.4.2	<i>Edit config.php file.....</i>	157
13	EVE RESOURCES.....	159

Preface

When I first heard about EVE-NG I was skeptical. Back then I used to Lab mainly with ESX by deploying many virtual Devices and connecting them manually by separate vSwitches for Point-to-Point connections. The Problem with that was, that it was extremely time-consuming and did not scale - for every new Device I had to create multiple vSwitches to interconnect them with the virtual Machines - a Nightmare. I was in the middle of my JNCIE-Exam-Prep when I first saw EVE-NG on Twitter - I downloaded the Community Edition, which was the only Edition back then and I was amazed how easy Labbing all of a sudden was. No more deploying of vSwitches to interconnect nodes and boy did it Scale...

If you follow me on Twitter you know, that I'm one of the hardest Juniper Fanboys and of course my Goal was to "Juniperize" EVE. I started to get in touch with Uldis and Alain and found myself into the Position as one of the Juniper Test Guys. Meanwhile I added nearly all Juniper related Devices (including cSRX and JATP) and I still test a Lot - but now on EVE-Pro.

The Pro-Edition was a big step forward for the Project. It added some nice Features like "hot-add-interconnect" and the Ability to use EVE-NG with multiple Users. Especially Companies will love EVE as it is THE Solution for Labs and PoC's. I have successfully run over 30 PoC's in EVE and over 100 Labs (Job-Related and Personal Labs) - and I still enjoy it every day thanks to EVE and the amazing Team behind it. When the Guys asked me to write the Introduction I was of course honored and now this Book is finally coming out to help you on your Quest to Setup, Run and Manage EVE-NG in a lot of possible ways.

Well - enough from my Side. I hope you enjoy this Cookbook and use it wisely for your Everyday EVE Work. If you have Problems there is always the EVE-Forum and Live-Helpdesk - you will also find me there from time to time ;)

I wish you happy reading and if you think, that this Product is amazing feel free to support it by buying the PRO-Edition or Donating a bit – it helps to expand this already cool Product even more and it also honors all the work that the Guys spent in it.

Christian Scholz
@chsjuniper

1 Introduction

1.1 What is EVE-NG?

To describe what **Emulated Virtual Environment – Next Generation** (EVE-NG) is without solely stating dry facts about features, we need to elaborate more on what EVE-NG can be used for and whom it would be useful for.

In some trivial dry words, EVE-NG gives you tools to use around virtual devices and interconnect them with other virtual or physical devices. Many of its features greatly simplify the usabilities, re-usability, manageability, interconnectivity, distribution and therefore the ability to understand and share topologies, work, ideas, concepts or simply “labs”. This can simply mean it will reduce the cost and time to set up what you need or it might enable you to do tasks you would not have thought could be done this simple.

1.2 What is EVE-NG used for?

This is the real question but there is no finite answer, the possibilities are almost limitless and depends on what you want to use it for.

It can be used for studying all kinds of technologies. You can learn about general technologies or vendor specific topics. You can test new technologies like network automation, SDN, etc.

It can be used to recreate corporate networks and test changes before putting them into production. You can create proof of concepts for clients. You can troubleshoot network issues by recreating them and e.g. use Wireshark to inspect packets.

It is most definitely not just for networking, it can be used to test software in simulated networks, test out security vulnerabilities of any kind, system engineering like LDAP and AD servers and many more areas.

You could set it up to automate sandboxing unknown files/software and use software to analyse short and long term behaviour for malicious intent much simpler than without EVE-NG.

The list of what EVE-NG can be used for could go on indefinitely, possibilities are limited by knowledge and imagination only. Both of which can be improved with EVE-NG.

To get a very small idea of what can be done with EVE-NG, check out the tested/[supported images](#) (many have not been tested, almost everything virtual should run on EVE-NG) and refer to section **12**.

EVE-NG helps you achieve what you want to and more.

1.3 Who is EVE-NG for?

EVE-NG is for everyone working in the Information Technology Sector, period.

It is for very large enterprise companies, training facilities, service providers, consultants, people who want to train themselves; it is for everyone, it is for YOU!

Use-cases that are more than worth it, almost priceless even, can be found everywhere.

The EVE-NG community version is free for everyone; while the paid professional version adds a few things that make your life easier. Almost everything can still be done with the free version, just less conveniently and therefore more time-consuming.

However, with the free version, the possibility to train yourself with technologies, hone your skills and become an expert even with very no monetary possibilities. For some this is and has been life changing.

2 System requirements

EVE-NG is available in the OVF or ISO file format. The Open Virtualization Format (OVF) is an open standard for packaging and distributing virtual appliances. It can be used to deploy a VM in hypervisors like VMware Workstation, Player and ESXi. Please note that installing EVE as a Virtual Machine (VM) will mean any nodes deployed within EVE will be nested. Nested virtualization causes degraded performance in deployed nodes. This should be fine for lab purposes as long as the host meets or exceeds the resource requirements for the deployed nodes.

EVE-NG can also be installed directly on physical hardware, without a hypervisor, using the provided ISO image. This is referred to as a “bare metal” install and is the most recommended method of installing EVE-NG.

2.1 Hardware requirements

2.1.1 Minimal Laptop/PC Desktop system requirements

Prerequisites:

CPU: Intel CPU supporting Intel® VT-x /EPT virtualization
Operating System: Windows 10, 11 or Linux Desktop
VMware Workstation 15.0 or later
VMware Player 15.0 or later

PC/Laptop HW requirements	
CPU	Intel i7 (4 Logical processors), Enabled Intel virtualization in BIOS
RAM	8Gb
HDD Space	40Gb
Network	LAN/WLAN
EVE Virtual machine requirements	
CPU	4/1 (Number of processors/Number of cores per processor) Enabled Intel VT-x/EPT virtualization engine
RAM	6Gb or more
HDD	40Gb or more
Network	VMware NAT or Bridged network adapter

Note: Minimal PC Desktop/Laptop will be able to run small Labs. The performance and quantity of nodes per lab depend on the types of nodes deployed in the lab.

Example:

IOL image-based nodes: up to 40-50 nodes per lab
Dynamips image-based nodes: up to 20-25 nodes per lab
vIOS image-based nodes: up to 8-10 nodes per lab
CSRv1000 or XRv image-based nodes: up to 2-3 per lab

2.1.2 Recommended Laptop/PC Desktop system requirements

Prerequisites:

CPU: Intel CPU supporting Intel® VT-x /EPT virtualization
Operation System: Windows 10, 11 or Linux Desktop
VMware Workstation 15.0 or later
VW Ware Player 15.0 or later

PC/Laptop HW requirements	
CPU	Intel i7 (8 Logical processors), Enabled Intel virtualization in BIOS
RAM	32Gb
HDD Space	200Gb
Network	LAN/WLAN
EVE Virtual machine requirements	
CPU	8/1 (Number of processors/Number of cores per processor) Enabled Intel VT-x/EPT virtualization engine
RAM	24Gb or more
HDD	200Gb or more
Network	VMware NAT or Bridged network adapter

Note: PC Desktops/Laptops will be able to run small to medium Labs. Performance and quantity of nodes per lab depend on the type of nodes deployed in the lab.

Example:

IOL image-based nodes: up to 120 nodes per lab
vIOS image-based nodes: up to 20-40 nodes per lab
CSR image-based nodes: up to 10 per lab

2.1.3 Virtual Server system requirements

Prerequisites:

CPU: Intel Xeon CPU supporting Intel® VT-x with Extended Page Tables (EPT)
Operation System: ESXi 6.5 or later

Server HW requirements	
CPU	Recommended CPU 2x Intel E5-2650v3 (40 Logical processors) or better supporting Intel® VT-x with Extended Page Tables (EPT) Minimum CPU is any Intel Xeon CPU supporting Intel® VT-x with Extended Page Tables (EPT)
RAM	128Gb
HDD Space	2Tb
Network	LAN Ethernet
EVE Virtual machine requirements	
CPU	32/1 (Number of processors/Number of cores per processor) Enabled Intel VT-x/EPT virtualization engine
RAM	64Gb or more
HDD	800Gb or more

Network	vSwitch/VMnet
---------	---------------

Note: Performance and quantity of nodes per lab depends from the type of nodes used in the lab.

Example:

120 IOL image-based lab

20 CSRV1000 image-based nodes per lab

2.1.4 Dedicated Server (bare) system requirements

Prerequisites:

CPU: Intel Xeon CPU supporting Intel® VT-x with Extended Page Tables (EPT)

Operation System: Ubuntu Server 20.04.4 LTS x64

Server HW requirements	
CPU	Recommended CPU Intel E5-2650v3 (40 Logical processors) or better supporting Intel® VT-x with Extended Page Tables (EPT) Minimum CPU is any Intel Xeon CPU supporting Intel® VT-x with Extended Page Tables (EPT)
RAM	128Gb
HDD Space	2Tb
Network	LAN Ethernet

Note: Performance and quantity of nodes per lab depends from type of nodes used in the lab.

2.1.5 Nodes per lab calculator

It is recommended to use the “nodes per lab calculator” to achieve best performance and avoid overloading your EVE system.

https://drive.google.com/file/d/1Rbu7KDNSNuWiv_AphWx0vCek8CKVB1WI/view

2.2 Supported virtualization platforms and software

- VMware Workstation 15.0 or later
- VMware Player 15.0 or later
- VMware ESXi 6.5 or later
- Ubuntu Server 20.04 LTS as platform for bare metal
- Google Cloud Platform

2.3 Unsupported hardware and systems

The following are currently not supported:

- VirtualBox virtualization

- Citrix XenServer
- Microsoft HyperV

3 Installation


3.1 VMware Workstation or VM Player

3.1.1 VMware workstation EVE VM installation using ISO image (preferred)

⚠ Mandatory Prerequisites: Internet must be reachable from your PC and VMware. EVE ISO installation requires internet access to get updates and install the latest EVE-COMM version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com

Download EVE-NG Community ISO distribution image:
<https://www.eve-ng.net/downloads/eve-ng-2>

3.1.1.1 EVE VM Setup and Settings

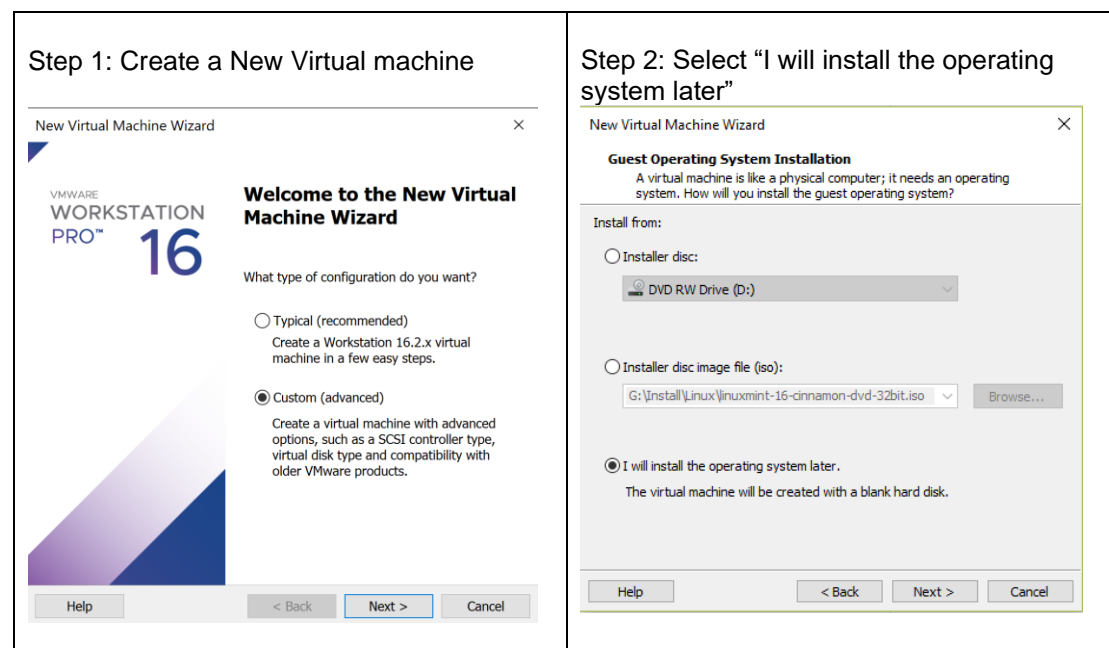

Step 3: Select a Guest Operating system: Linux and select the version: Ubuntu 64-bit

New Virtual Machine Wizard

Select a Guest Operating System
Which operating system will be installed on this virtual machine?

Guest operating system

- ☐ Microsoft Windows
- ☒ Linux
- ☐ Novell NetWare
- ☐ Solaris
- ☐ VMware ESX
- ☐ Other

Version

Ubuntu 64-bit

Help < Back Next > Cancel

Step 4: Enter the name for your EVE- COMM VM and select Location where your EVE VM will be stored on the host PC.

New Virtual Machine Wizard

Name the Virtual Machine
What name would you like to use for this virtual machine?

Virtual machine name:

EVE-COM-5

Location:

C:\Users\Uldis\Documents\Virtual Machines\EVE-COM-5 Browse...

The default location can be changed at Edit > Preferences.

< Back Next > Cancel

Step 5: Select max Number of processors, and Number of cores per processor =1

New Virtual Machine Wizard

Processor Configuration
Specify the number of processors for this virtual machine.

Processors

Number of processors: 8

Number of cores per processor: 1

Total processor cores: 8

Help < Back Next > Cancel

Step 6: Assign desirable memory for your EVE VM

New Virtual Machine Wizard

Memory for the Virtual Machine
How much memory would you like to use for this virtual machine?

Specify the amount of memory allocated to this virtual machine. The memory size must be a multiple of 4 MB.

Memory for this virtual machine: 16384 MB

128 GB
64 GB
32 GB
16 GB
8 GB
4 GB
2 GB
1 GB
512 MB
256 MB
128 MB
64 MB
32 MB
16 MB
8 MB
4 MB

Maximum recommended memory:
27.8 GB

Recommended memory:
4 GB

Guest OS recommended minimum:
2 GB

Help < Back Next > Cancel

Step 7: Select then network for your EVE VM. For Laptop it is recommended to use NAT Adaptor

New Virtual Machine Wizard

Network Type
What type of network do you want to add?

Network connection

☐ Use bridged networking
Give the guest operating system direct access to an external Ethernet network. The guest must have its own IP address on the external network.

☒ Use network address translation (NAT)
Give the guest operating system access to the host computer's dial-up or external Ethernet network connection using the host's IP address.

☐ Use host-only networking
Connect the guest operating system to a private virtual network on the host computer.

☐ Do not use a network connection

Help < Back Next > Cancel

Step 8: Leave recommended I/O settings, LSI Logic

New Virtual Machine Wizard

Select I/O Controller Types
Which SCSI controller type would you like to use for SCSI virtual disks?

I/O controller types

SCSI Controller:

☐ BusLogic (Not available for 64-bit guests)

☒ LSI Logic (Recommended)

☐ LSI Logic SAS

☐ Paravirtualized SCSI

Help < Back Next > Cancel

Step 9: Leave recommended Disk Type (SCSI) settings

New Virtual Machine Wizard

Select a Disk Type
What kind of disk do you want to create?

Virtual disk type

☐ IDE

☒ SCSI (Recommended)

☐ SATA

☐ NVMe

Help < Back Next > Cancel

Step 10: Select Create a new virtual disk

New Virtual Machine Wizard

Select a Disk
Which disk do you want to use?

Disk

☒ Create a new virtual disk
A virtual disk is composed of one or more files on the host file system, which will appear as a single hard disk to the guest operating system. Virtual disks can easily be copied or moved on the same host or between hosts.

☐ Use an existing virtual disk
Choose this option to reuse a previously configured disk.

☐ Use a physical disk (for advanced users)
Choose this option to give the virtual machine direct access to a local hard disk. Requires administrator privileges.

Help < Back Next > Cancel

Step 11: Select your desirable HDD size. It is recommended to set minimum 200Gb or more. Select Store virtual disk as single file.

New Virtual Machine Wizard

Specify Disk Capacity
How large do you want this disk to be?

Maximum disk size (GB):

Recommended size for Ubuntu 64-bit: 20 GB

☐ Allocate all disk space now.
Allocating the full capacity can enhance performance but requires all of the physical disk space to be available right now. If you do not allocate all the space now, the virtual disk starts small and grows as you add data to it.

☒ Store virtual disk as a single file
☐ Split virtual disk into multiple files
Splitting the disk makes it easier to move the virtual machine to another computer but may reduce performance with very large disks.

Help < Back Next > Cancel

Step 12: Select Customize Hardware

New Virtual Machine Wizard

Ready to Create Virtual Machine
Click Finish to create the virtual machine. Then you can install Ubuntu 64-bit.

The virtual machine will be created with the following settings:

Name:	EVE-COM-5
Location:	C:\Users\Uldis\Documents\Virtual Machines\EVE-COM-5
Version:	Workstation 16.2.x
Operating System:	Ubuntu 64-bit
Hard Disk:	100 GB
Memory:	16384 MB
Network Adapter:	NAT
Other Devices:	8 CPU cores, CD/DVD, USB Controller, Printer, Sound Card

Customize Hardware...

< Back Finish Cancel

Step 13: **IMPORTANT!** Select CPU and Enable Virtualize Intel VT-x/EPT option

Hardware

Device	Summary
Memory	16 GB
Processors	8
New CD/DVD (SATA)	Using file D:\EVE-5-COM-5.iso
Network Adapter	NAT
USB Controller	Present
Sound Card	Auto detect
Printer	Present
Display	Auto detect

Processors
Number of processors: 8
Number of cores per processor: 1
Total processor cores: 8

Virtualization engine
☒ Virtualize Intel VT-x/EPT or AMD-V/RVI
☐ Virtualize CPU performance counters
☐ Virtualize IOMMU (IO memory management unit)

Add... Remove Close Help


Step 14: Select CD/DVD Option: "use ISO image file." Browse to your downloaded eve-com-v5.iso (actual name can be different) file

Hardware

Device	Summary	Device status
Memory	16 GB	Connected
Processors	8	Connect at power on
New CD/DVD (SATA)	Auto detect	
Network Adapter	NAT	
USB Controller	Present	
Sound Card	Auto detect	
Printer	Present	
Display	Auto detect	

Connection
☐ Use physical drive:
Auto detect
☒ Use ISO image file:
D:\EVE-5-COM-5\eve-com-v5.iso Browse... Advanced...

Add... Remove Close Help

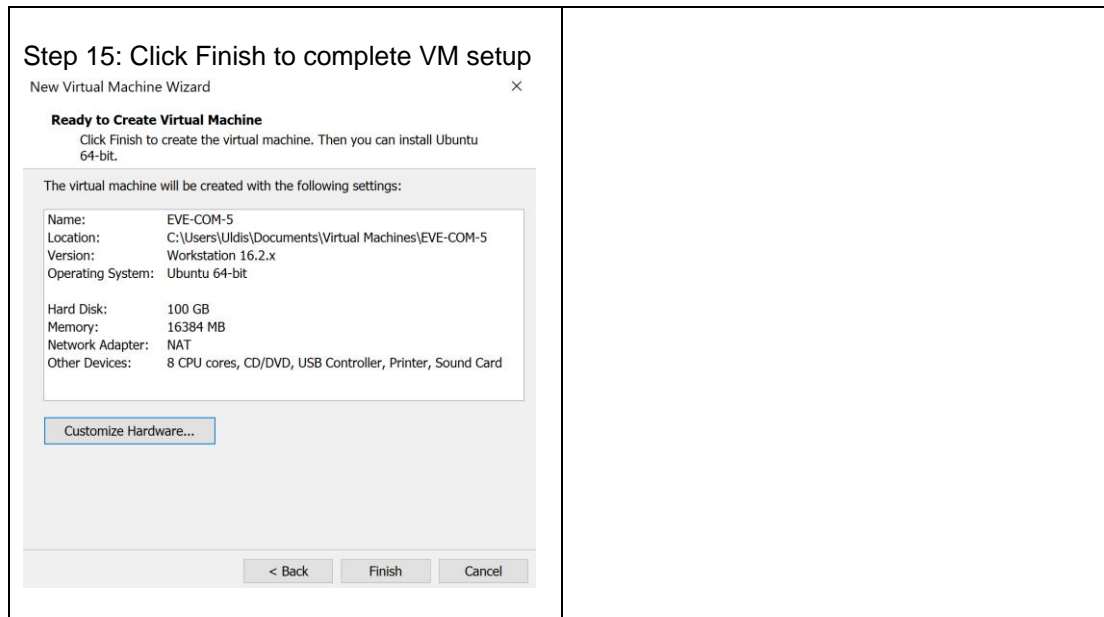


3.1.1.2 EVE-NG VM Installation steps


! Mandatory Prerequisites: Internet must be reachable from your PC and VMware. EVE ISO installation requires internet access to get updates and install the latest EVE-CE version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com

EVE VM Installation from ISO has 3 Phases

Phase 1 (Ubuntu installation)

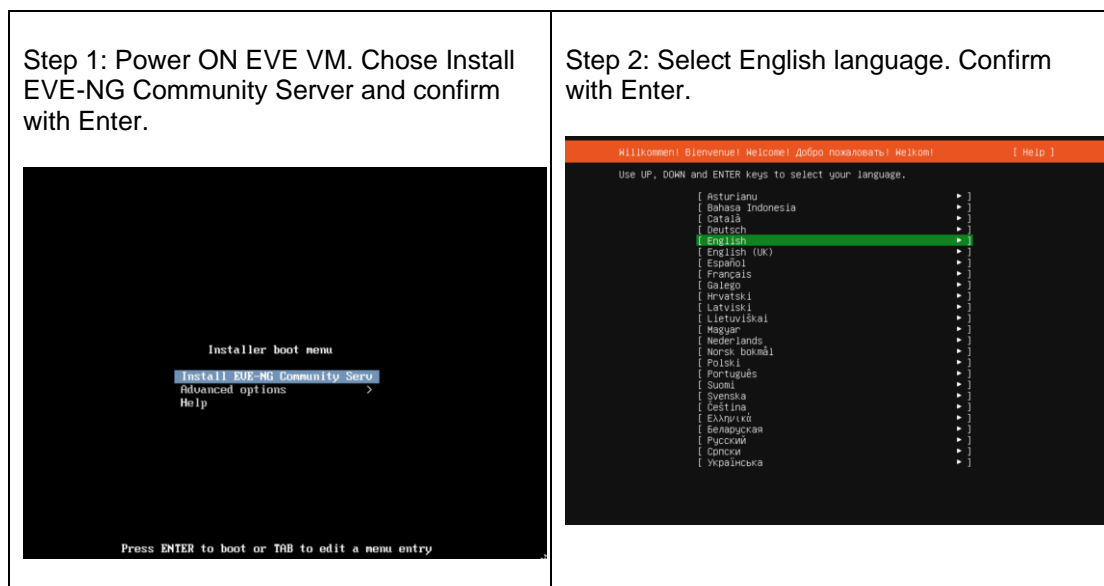


Step 3: Make sure if English US keyboard is selected and confirm with Enter.

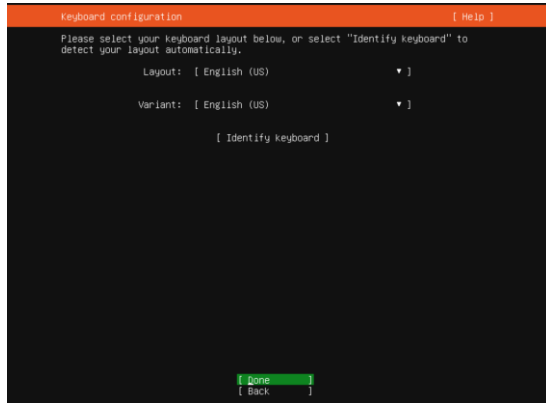


Step 4: If your network has **DHCP ENABLED**, Continue to **Step 10**


Step 5: If your network has not **DHCP**. Static IP setup. If you have not enabled DHCP in the network, you must assign an IP address manually. Use arrow UP key to select your interface for IP address.assignment.

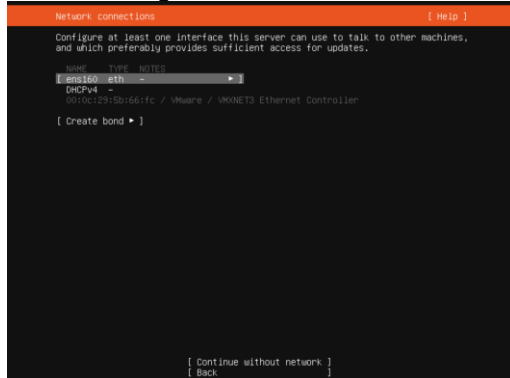

Step 6: Confirm interface selection with Enter, select "Edit IPv4" and confirm with Enter again.

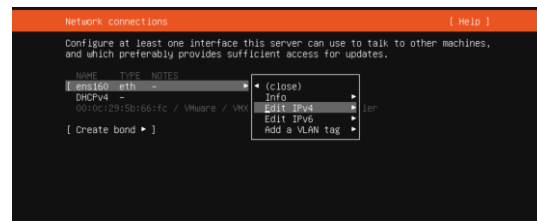

Step 7: Hit Enter on IPv4 Method and select "Manual", confirm with Enter.

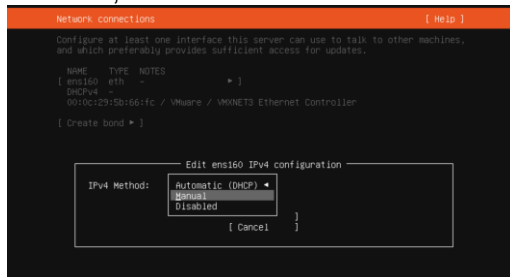

Step 8: Enter your "Subnet", "IP Address", "Gateway IP", "Domain server IPs" and "Search domain". Select "Save" and confirm with Enter. **NOTE, it is very important that your DNS (Name servers) will resolve**

Internet names.


Step 9: Select “Done” and confirm with Enter

Step 10: If your DHCP IP settings are correct, select Done and confirm with Enter.


Step 11: If you have proxy in use for your internet, assign your network proxy settings. If no proxy in use, with Tab key select Continue and confirm with Enter.

Step 12: Select “Continue” and confirm with Enter.


Step 13: After the Ubuntu “Install Complete” select “Reboot Now” and hit Enter to continue.

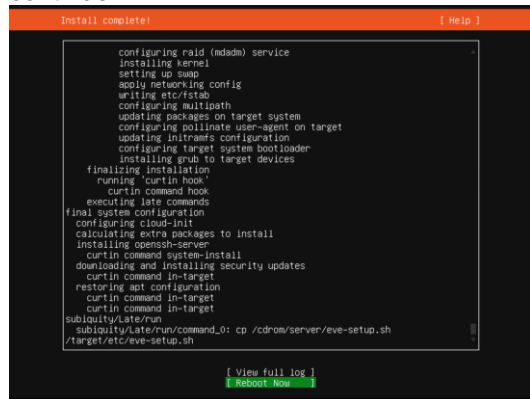


Step 14: Without powering off the EVE VM, open the EVE VM settings and remove CD/DVD ISO Device. Save VM Settings.

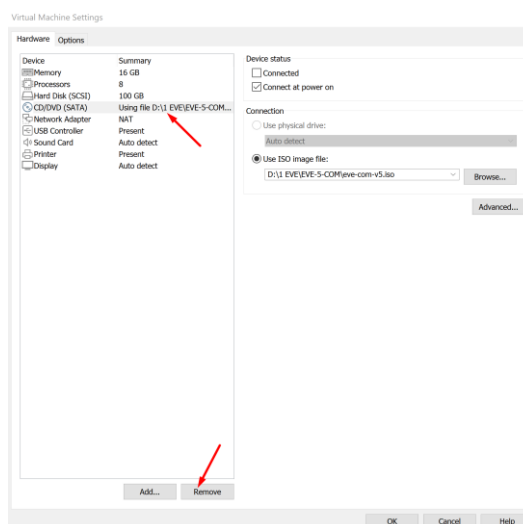

Step 15: Return back to EVE console screen and confirm Continue with Enter, EVE VM will reboot and continue Phase 2 installation

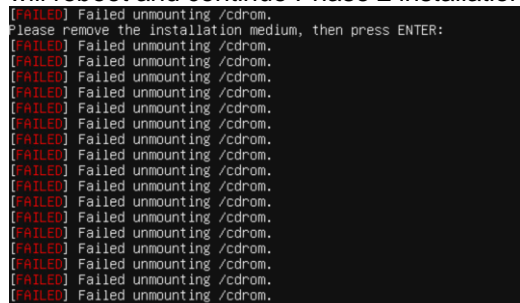


Step 16: Depending on your internet speed EVE installation will take some time. After installation EVE VM will auto reboot and EVE login screen will appear, login in CLI with **root/eve** and follow installation Phase 3

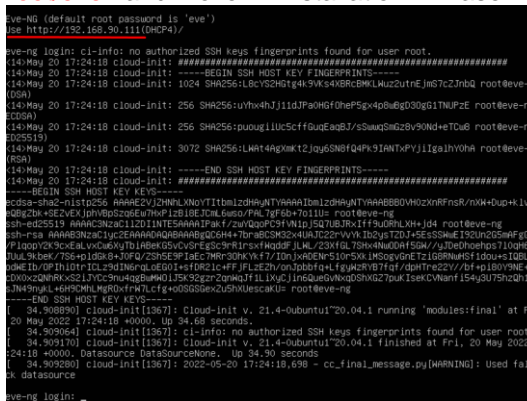

Step 17: Setup EVE Management IP address. A Static IP address setup is preferred

Step 18: After your EVE is rebooted,
Login to EVE CLI and type:



Follow steps in section :

3.5.1 for static IP, **3.5.2** for DHCP IP

apt upgrade

Step 19: On the EVE CLI prompt, reboot EVE by typing

reboot

NOTE: Verify your EVE-NG server installation, type “dpkg -l eve-ng” command, it must display latest EVE Community version

```
root@eve-ng:~# dpkg -l eve-ng
Desired=Unknown/Install/Remove/Purge/Hold
|   Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                  Version              Architecture Description
+++-=====
ii  eve-ng                  5.0.1-10            amd64          A new generation software
for networking labs.
root@eve-ng:~#
```

NOTE: If your newly installed EVE-NG Community shows nothing like above, you must check your internet reachability and verify DNS configuration on your EVE-CE server.

```
root@eve-ng:~# ping www.google.com
PING www.google.com (172.217.22.164) 56(84) bytes of data.
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=1
ttl=120 time=8.84 ms
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=2
ttl=120 time=8.84 ms
^C
--- www.google.com ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1001ms
rtt min/avg/max/mdev = 8.848/8.848/8.849/0.094 ms
root@eve-ng
```

Launch EVE-NG Community installation manually

```
root@eve-ng:~# cd /etc
root@eve-ng:~# ./eve-setup
```

⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section **12**


3.1.2 VMware workstation OVF deployment

Download EVE-NG Community OVF image zip file, place it in the dedicated HDD storage for EVE VM and unzip it:


<https://www.eve-ng.net/index.php/download/#DL-COMM>

3.1.2.1 Deployment and VM machine settings


Step 1: VMware workstation or VM Player, Open Virtual Machine

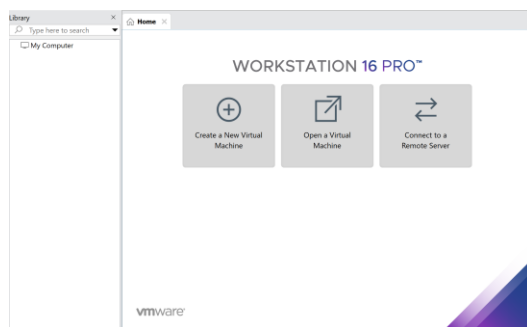


Step 2: Browse your downloaded and unzipped EVE-COM-5, EVE-COM-5.ovf, followed by Open

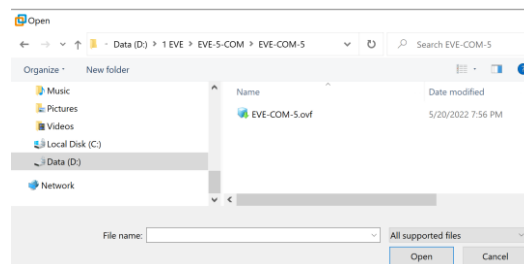

Step 3: Browse your desired EVE VM store destination followed by Import

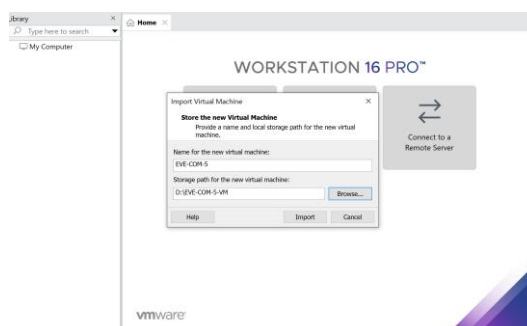

Step 4: Open your EVE VM Settings and set the desired RAM.

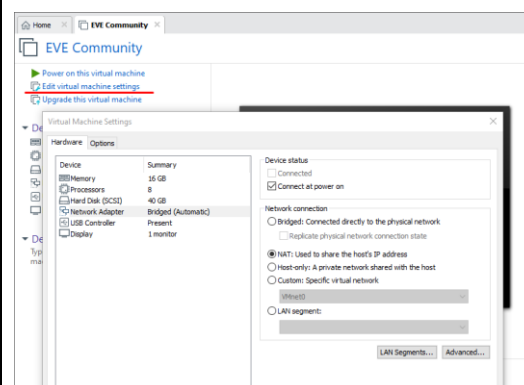


Step 5: **IMPORTANT** Set CPU Number of Cores and number of cores per processor. Set Intel VT-x/EPT Virtualization engine to ON (checked).

NOTE: VMware Player will display only one CPU option: Number of processors.

Step 6: **Laptop PC** Select your desirable Network Adapter.


NOTE: It is recommended to choose the NAT adapter option for Laptops to avoid EVE management interface IP changes. This can happen anytime the laptop is connected to a different SSID.

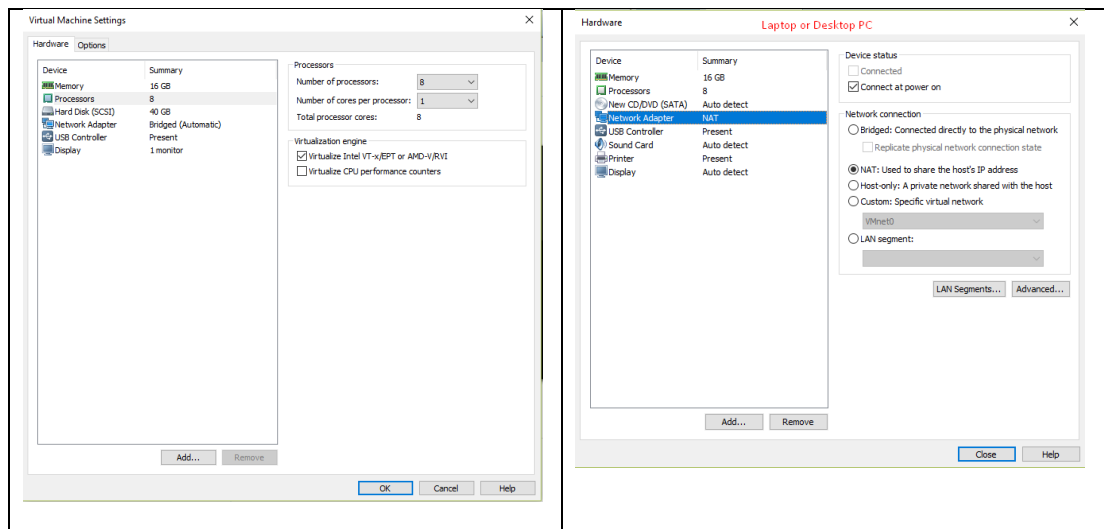

Step 7: Desktop PC Select your desirable Network Adapter.

NOTE: Desktop PC EVE management interface can be either NAT or Bridged to home LAN subnet.

Step 8: Power ON your EVE VM and follow Management IP setup instructions described in section **3.5.1** for Static IP or **3.5.2** for DHCP IP.

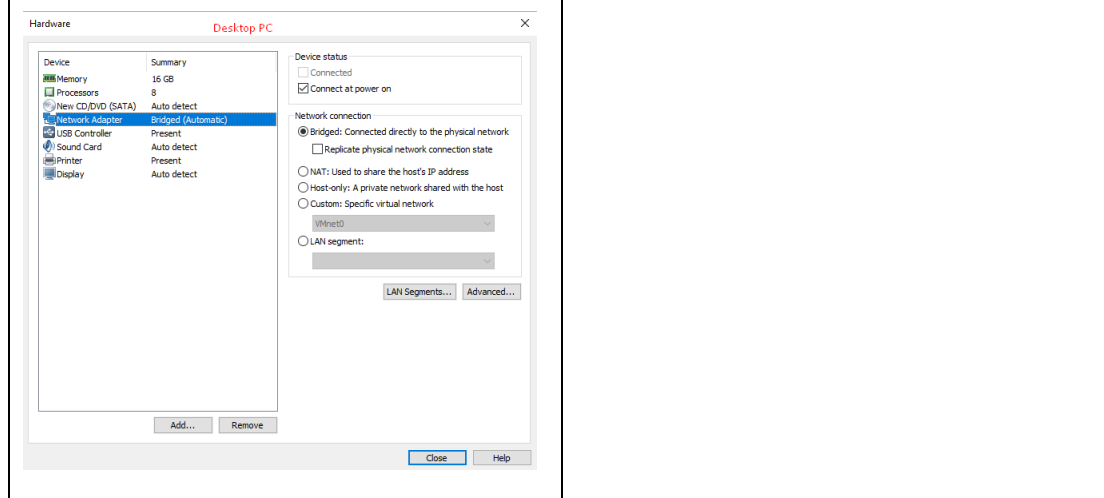

IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section **12**

3.1.2.2 OVF VM update to the latest EVE version

Step 9: Make sure if your EVE OVF VM is up to date to the newest EVE version. Follow the steps described in section **4**.

3.1.2.3 OVF VM HDD Size expansion

! IMPORTANT NOTE: **DO NOT** expand the current EVE OVF HDD. To expand your EVE system size, please follow Troubleshooting section **11.2**

3.2 VMware ESXi

3.2.1 VMware ESXi EVE installation using ISO image (preferred)


! Mandatory Prerequisites: Internet must be reachable from your Server and ESXi. EVE ISO installation requires internet access to get updates and install the latest EVE-COMM version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com

Download EVE-NG Community ISO installation image:


<http://www.eve-ng.net/downloads/eve-ng-2>

3.2.1.1 EVE-NG ESXi VM Setup and Settings

Step 1: Upload EVE ISO image to the ESXi store.

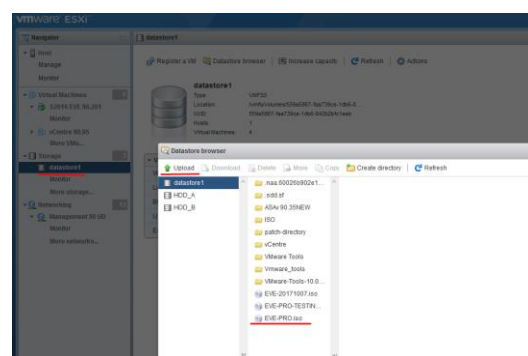



Step 2: Create NEW VM

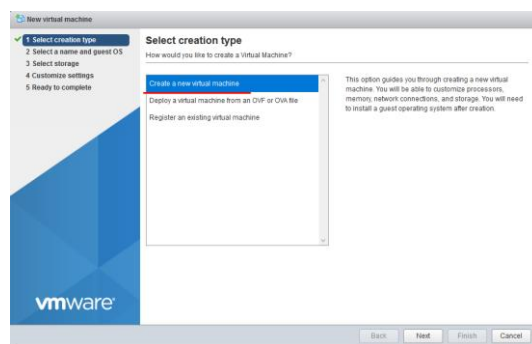


Step 3: Enter the name for your EVE-CE VM and select Guest Operating system Linux and version: Ubuntu 64-bit

Step 4: Select Location where your EVE VM will be stored in HDD.

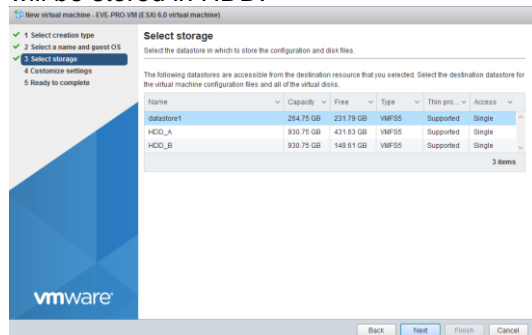


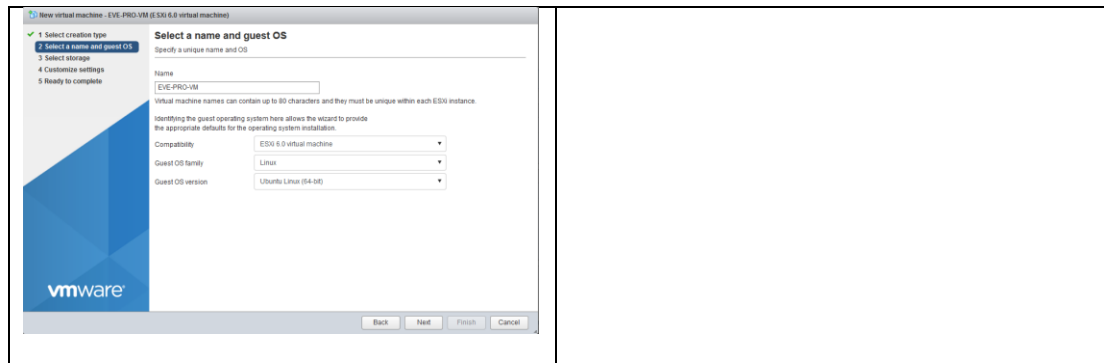


Step 5: IMPORTANT Customize your EVE VM CPU Settings. Set CPU Number of Cores and number of cores per processor. Set Intel VT-x/EPT Virtualization to ON (checked).

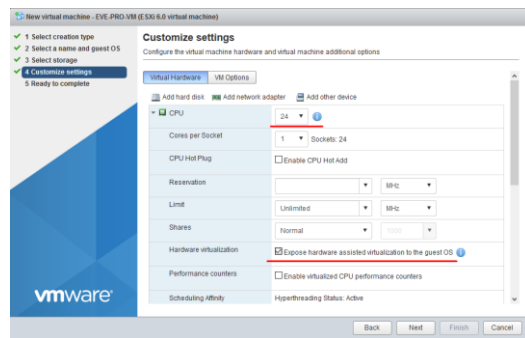


Step 6: Assign desirable RAM for your EVE

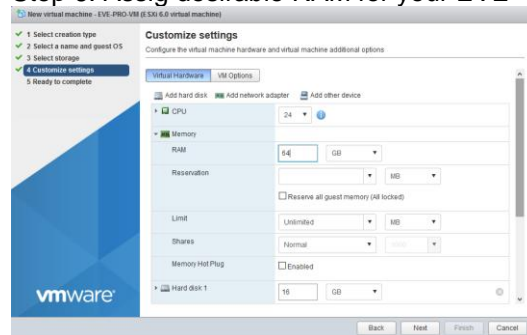

Step 7: Set the size of HDD for your new EVE VM. It is recommended to set "Thick Provisioned eagerly provisioned". Server EVE HDD is recommended to set at least 500Gb

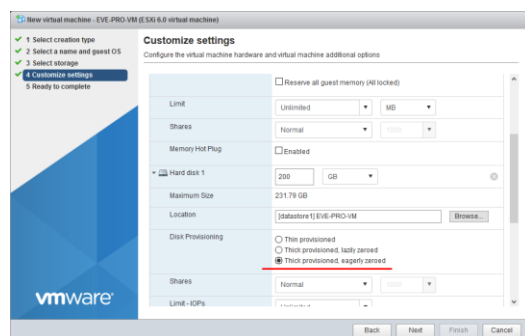


Step 8: Set your Management network. Adapter type VMXNET3

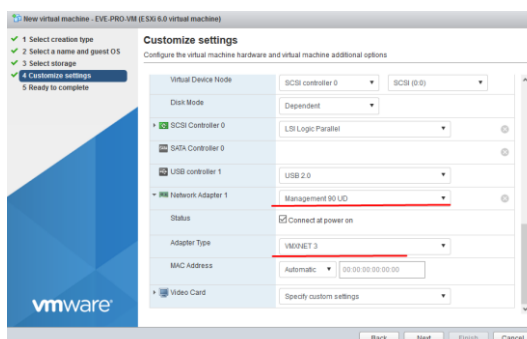


NOTE: Additional Network Adapters can be added for further use.

Step 9: Add new device to your EVE VM, CD/DVD

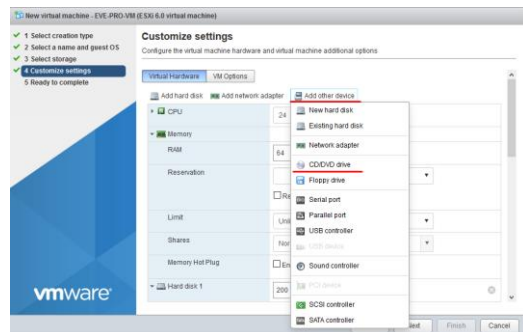

Step 10: Set DVD drive to “Datastore ISO File” and browse your uploaded EVE-CE.iso. Make sure that Status is checked ON, “Connect at power on”

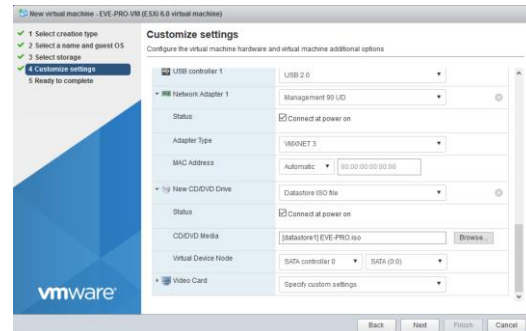


3.2.1.2 EVE-NG ESXi VM Installation steps

⚠ Mandatory Prerequisites: Internet must be reachable from your PC and VMware. EVE ISO installation requires internet access to get updates and install the latest EVE-CE version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com


EVE ESXi VM Installation from ISO has 3 Phases

Phase 1 (Ubuntu installation)

Step 1: Power ON EVE VM. Chose Install EVE-NG Community Server and confirm with Enter.

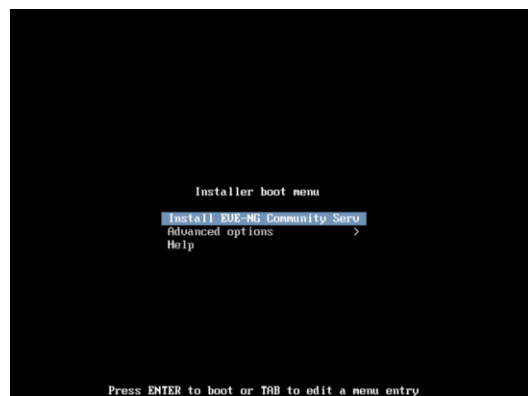


Step 2: Select English language. Confirm with Enter.

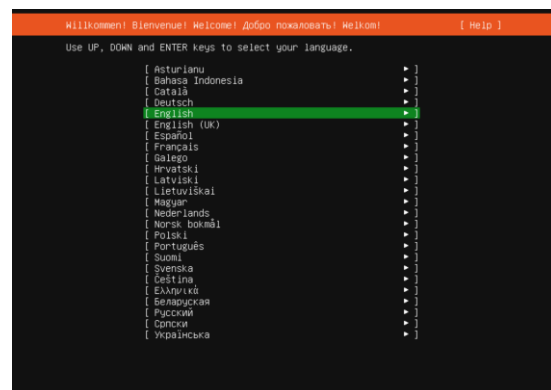


Step 3: Make sure if English US keyboard is selected and confirm with Enter.


Step 4: If your network has **DHCP ENABLED**, Continue to **Step 10**

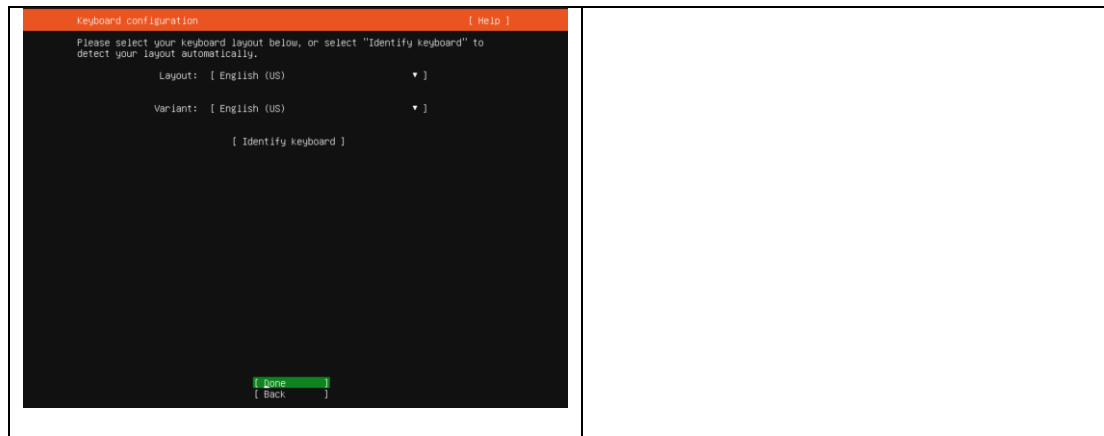


Step 5: If your network has not **DHCP**. Static IP setup. If you have not enabled DHCP in the network, you must assign an IP address manually. Use arrow UP key to select your interface for IP address.assignment.

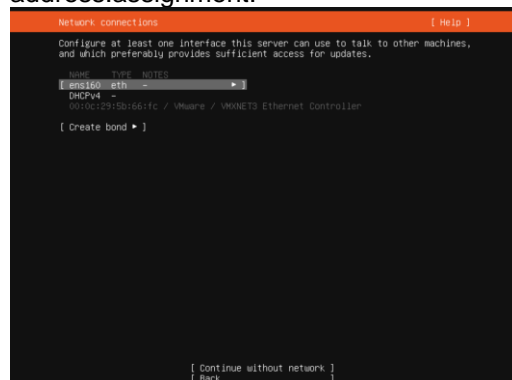

Step 6: Confirm interface selection with Enter, select "Edit IPv4" and confirm with Enter again.

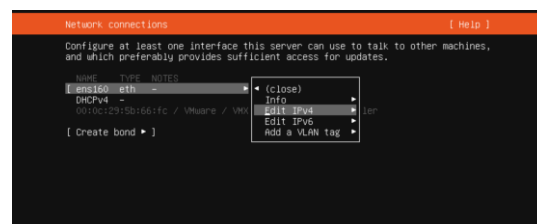


Step 7: Hit Enter on IPv4 Method and select "Manual", confirm with Enter.

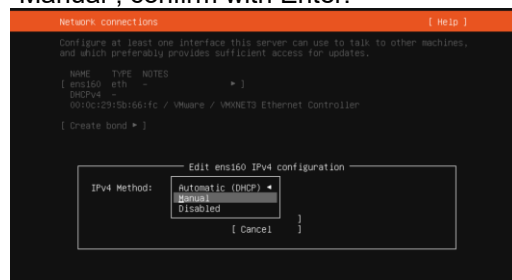

Step 8: Enter your "Subnet", "IP Address", "Gateway IP", "Domain server IPs" and "Search domain". Select "Save" and confirm with Enter. **NOTE, it is very important that your DNS (Name servers) will resolve**

Internet names.

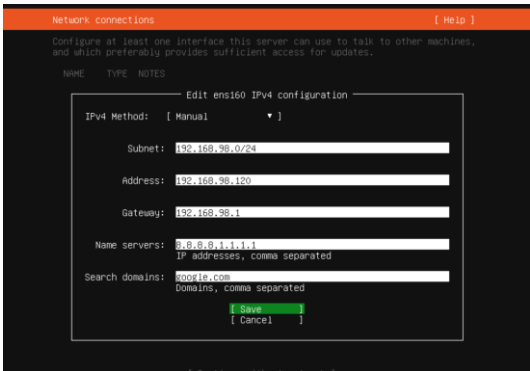


Step 9: Select “Done” and confirm with Enter




Step 10: If your DHCP IP settings are correct, select Done and confirm with Enter.



Step 11: If you have proxy in use for your internet, assign your network proxy settings. If no proxy in use, with Tab key select Continue and confirm with Enter.

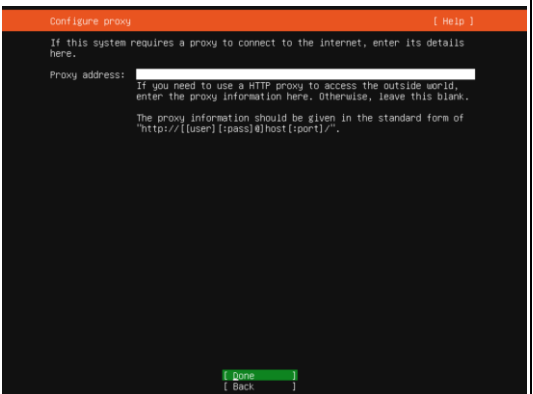

Step 12: Select “Continue” and confirm with Enter.

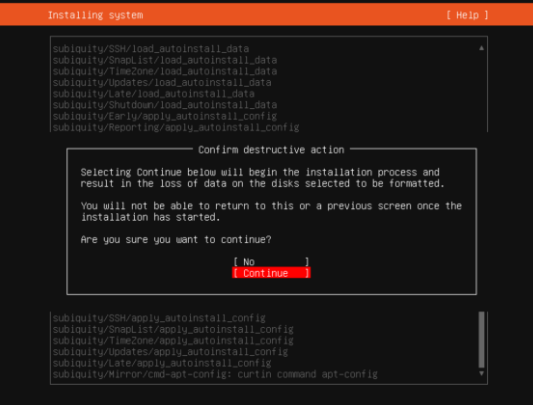

Page 29 of 159

Step 19: On the EVE CLI prompt, reboot EVE by typing

```
reboot
```

NOTE: Verify your EVE-NG server installation, type “dpkg -l eve-ng” command, it must display latest EVE Community version


```
root@eve-ng:~# dpkg -l eve-ng
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name Version Architecture Description
++-=====
=====
ii eve-ng 5.0.1-10 amd64 A new generation software
for networking labs.
root@eve-ng:~#
```

NOTE: If your newly installed EVE-NG Community shows nothing like above, you must check your internet reachability and verify DNS configuration on your EVE-PRO server.

```
root@eve-ng:~# ping www.google.com
PING www.google.com (172.217.22.164) 56(84) bytes of data.
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=1
ttl=120 time=8.84 ms
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=2
ttl=120 time=8.84 ms
^C
--- www.google.com ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1001ms
rtt min/avg/max/mdev = 8.848/8.848/8.849/0.094 ms
root@eve-ng
```

Launch EVE-NG Community installation manually

```
root@eve-ng:~# cd /etc
root@eve-ng:~# ./eve-setup
```

 **IMPORTANT NOTE:** You must prepare and upload at least a couple of images to start building your labs. Refer to section **12**


3.2.2 VMware ESXi OVF deployment

Download EVE-NG Community OVF image zip file, place it in the dedicated HDD storage for EVE VM and unzip it:


<https://www.eve-ng.net/index.php/download/#DL-COMM>

3.2.2.1 ESXi OVF VM Setup and Settings

Step 1: ESXi Host, Create/Register VM

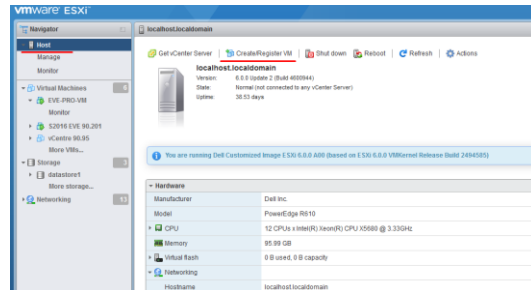


Step 2: Set option Deploy a virtual machine from an OVF or OVA file

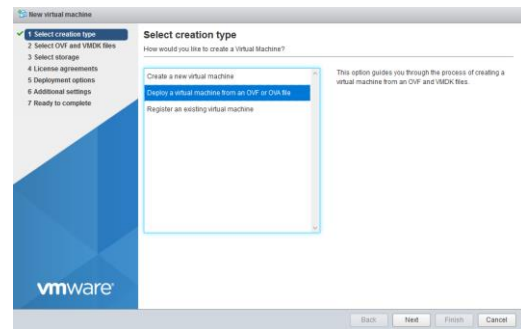

Step 3: Type the name for your new EVE VM and browse to select your all downloaded EVE OVF files




Step 4: Select the storage where your EVE VM will be deployed.

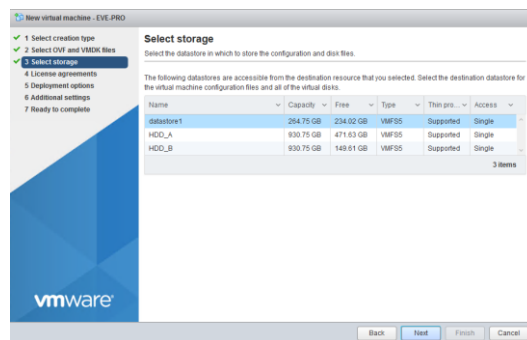


Step 5: Select your Management network and **Thick Disk provisioning**. EVE OVF HDD is only 100Gb large. It is recommended after installation to add extra HDD. Section **11.2**

Step 6: **⚠ IMPORTANT** Open VM Settings. Set the quantity of CPUs and number of cores per socket. Set Intel VT-x/EPT Hardware Virtualization engine to ON (checked).

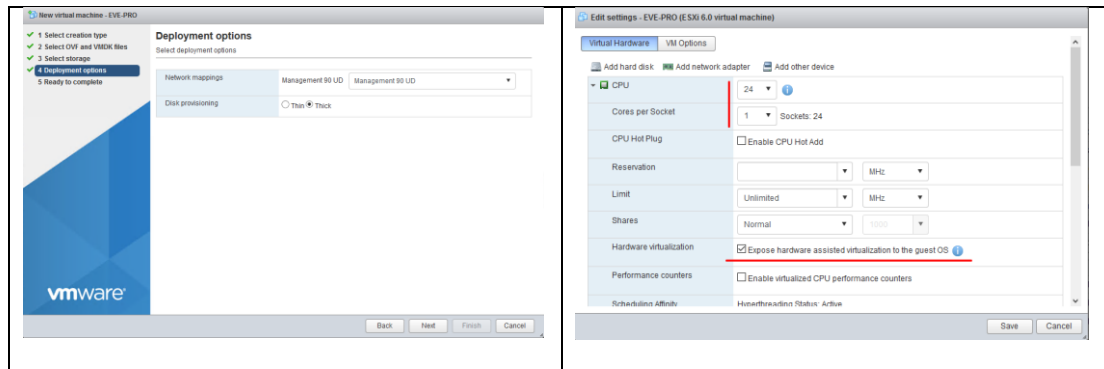

Step 7: Set desirable RAM for your EVE.

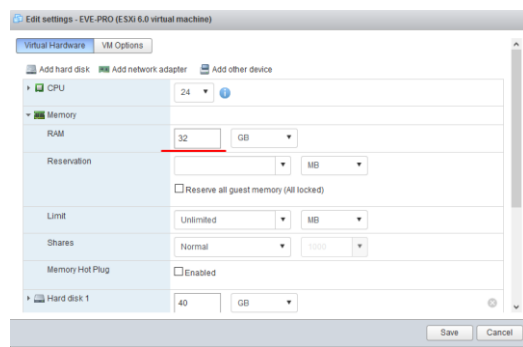

Step 8: Power ON your EVE VM and follow Management IP setup instructions described in section 3.5.1 for Static IP or 3.5.2 for DHCP IP.

IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section 12

3.2.2.2 ESXi OVF VM update to the latest EVE version

Make sure that your EVE OVF VM is up to date with the newest EVE version. Follow the steps described in section 4 for upgrade instructions

3.2.2.3 ESXi OVF VM HDD Size expansion

NOTE: IMPORTANT! DO NOT expand the current EVE OVF HDD. To expand your EVEs system disk size, please follow the troubleshooting section 11.2


3.3 Bare hardware server EVE installation

Mandatory Prerequisites: Internet must be reachable from your Server. EVE ISO installation requires internet access to get updates and install the latest EVE-COMM version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com


3.3.1 BM Server Installation EVE ISO

Phase 1 (Ubuntu installation)


Step 1: Create a bootable DVD disk or USB flash drive with an Ubuntu server image. Boot your server from ISO. Chose Install EVE-NG Community Server and confirm with Enter.

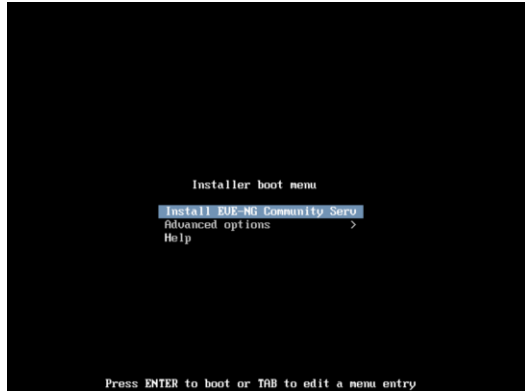

Step 2: Select English language. Confirm with Enter.

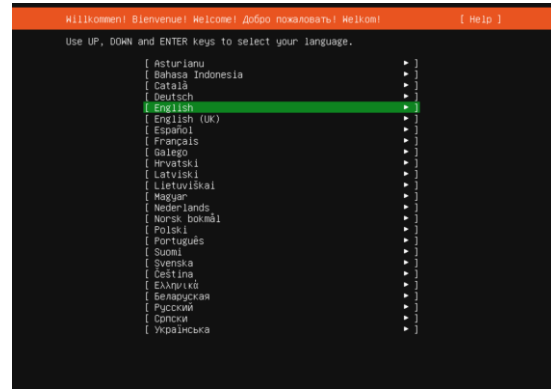


Step 3: Make sure if English US keyboard is selected and confirm with Enter.

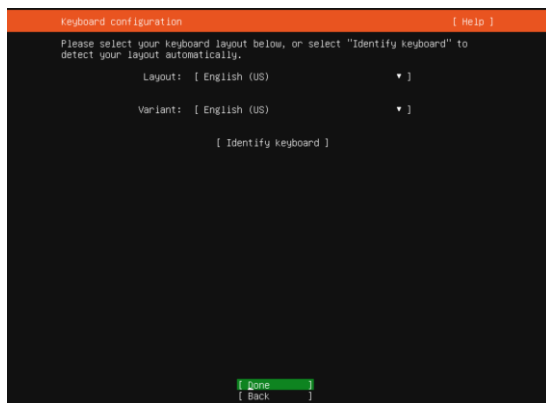


Step 4: If your network has **DHCP ENABLED**, Continue to **Step 10**

Step 5: If your network has not **DHCP**. Static IP setup. If you have not enabled DHCP in the network, you must assign an IP address manually. Use arrow UP key to select your interface for IP


Step 6: Confirm interface selection with Enter, select "Edit IPv4" and confirm with Enter again.

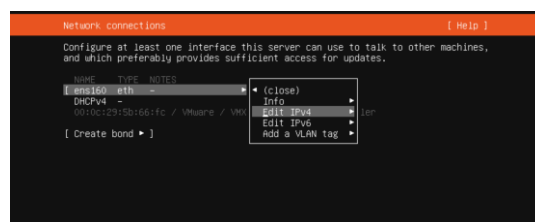


address.assignment.

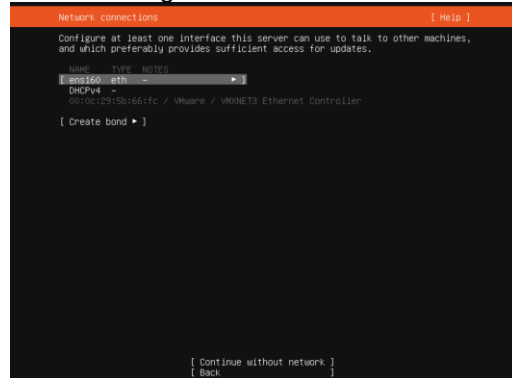


Step 7: Hit Enter on IPv4 Method and select “Manual”, confirm with Enter.

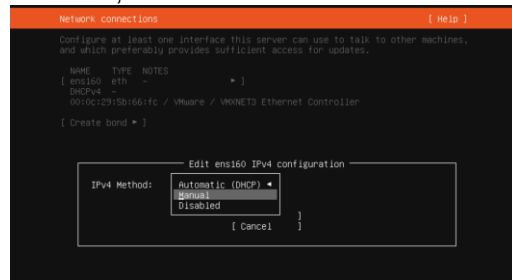


Step 8: Enter your “Subnet”, “IP Address”, “Gateway IP”, “Domain server IPs” and “Search domain”. Select “Save” and confirm with Enter. **NOTE, it is very important that your DNS (Name servers) will resolve Internet names.**

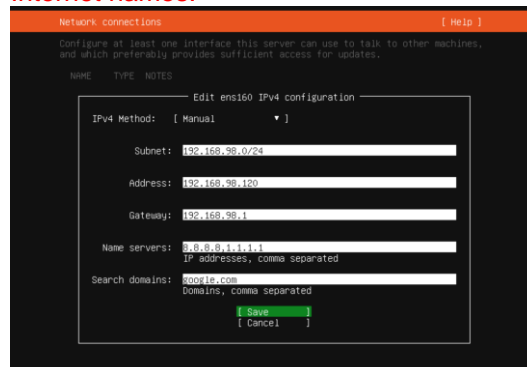


Step 9: Select “Done” and confirm with Enter

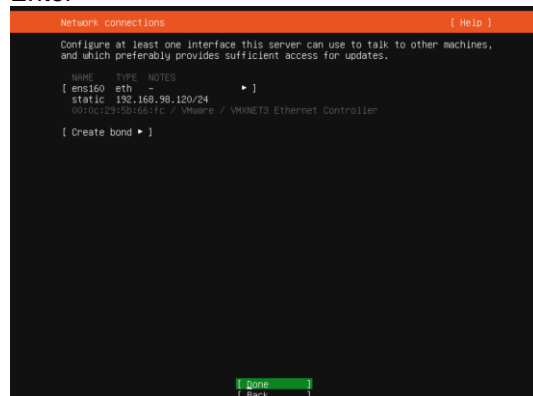


Step 10: If your DHCP IP settings are correct, select Done and confirm with Enter.

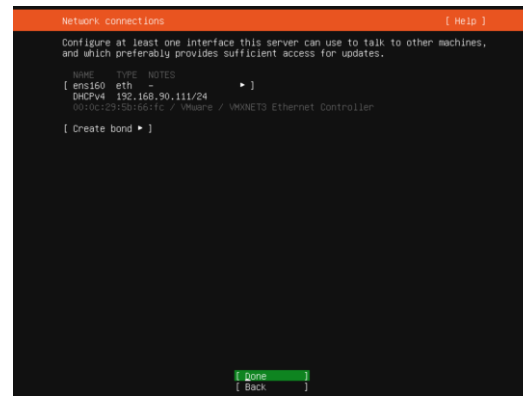

Step 11: If you have proxy in use for your internet, assign your network proxy settings. If no proxy in use, with Tab key select Continue and confirm with Enter.

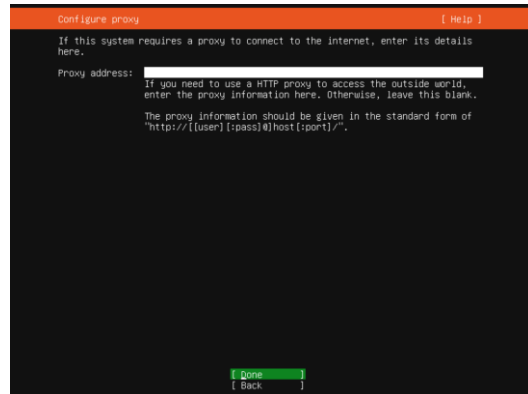


Step 12: Select "Continue" and confirm with Enter.

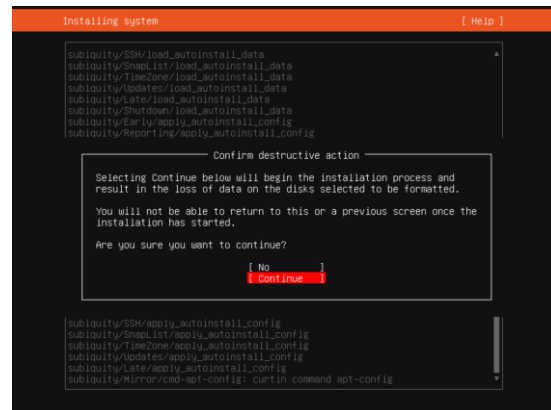

EVE VM Installation Phase 2 (EVE installation)

Step 13: After the Ubuntu "Install Complete" select "Reboot Now" and hit Enter to continue.

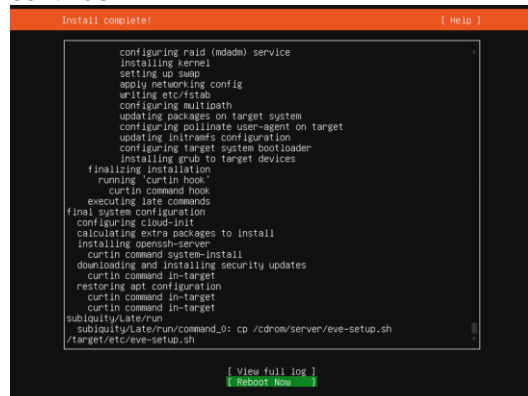

Step 14: Remove CD/DVD ISO Media.

Step 15: Return back to EVE console screen and confirm Continue with Enter, EVE VM

Step 16: Depending on your internet speed EVE installation will take some time. After installation EVE VM will auto reboot and EVE login screen will appear, login in CLI with

EVE Installation Phase 3 (Management IP setup and updates)

NOTE: Verify your EVE-NG server installation, type “dpkg -l eve-ng” command, it must display latest EVE Community version

NOTE: If your newly installed EVE-NG Community shows nothing like above, you must check your internet reachability and verify DNS configuration on your EVE-CE server.

```
root@eve-ng:~# ping www.google.com
PING www.google.com (172.217.22.164) 56(84) bytes of data.
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=1
ttl=120 time=8.84 ms
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=2
ttl=120 time=8.84 ms
^C
--- www.google.com ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1001ms
rtt min/avg/max/mdev = 8.848/8.848/8.849/0.094 ms
```

```
root@eve-ng
```

Launch EVE-NG Community installation manually

```
root@eve-ng:~# cd /etc
root@eve-ng:~# ./eve-setup
```

⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer section **12**

3.3.2 BM Server Installation Ubuntu Legacy ISO


⚠ Mandatory Prerequisites: Internet must be reachable from your Server. This ISO installation requires internet access to get updates and install the latest EVE-CE version from the EVE-NG repository. DNS must resolve names!

Download Ubuntu Legacy Server installation image/ISO


<https://releases.ubuntu.com/focal/>

Phase 1 (Ubuntu installation)

Step 1: Create a bootable DVD disk or USB flash drive with an Ubuntu server image. Boot your server from ISO. Select English language. Confirm with Enter.

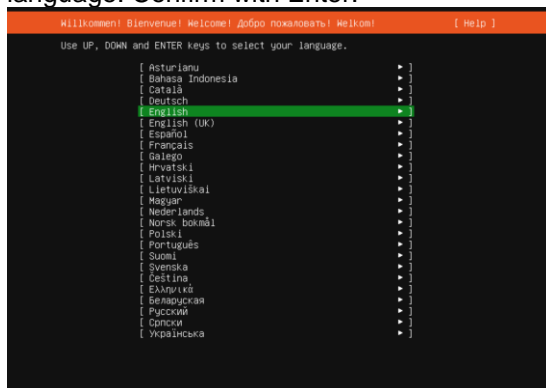


Step 2: Select Option Update to the new installer, following by Enter.

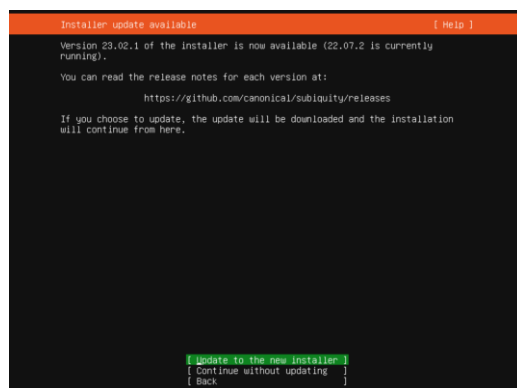


Step 3: Make sure if English US keyboard is selected and confirm with Done/Enter.

Step 4: Select Option Ubuntu Server [X], following by Done/Enter.

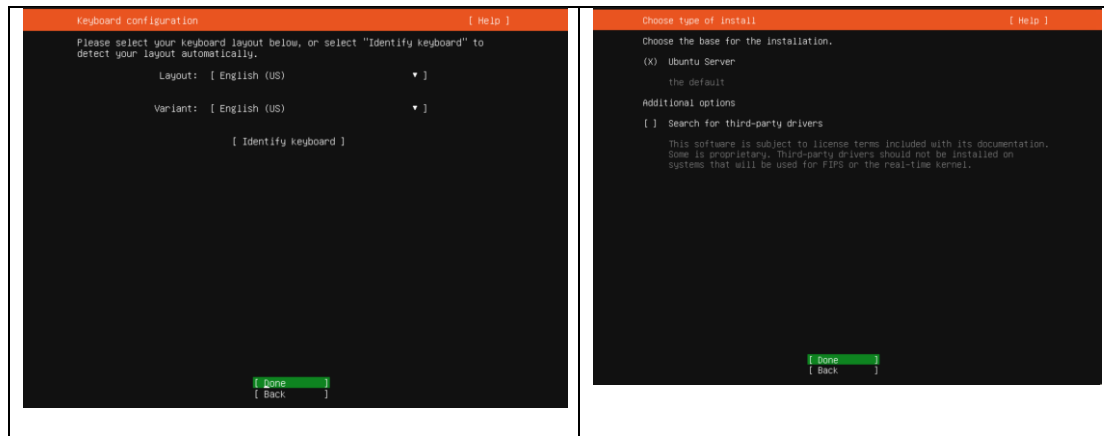


Step 5: If your network has **DHCP ENABLED**, Continue to **Step 11**


Step 6: If your network has not **DHCP**. Static IP setup. If you have not enabled DHCP in the network, you must assign an IP address manually. Use arrow UP key to select your interface for IP address.assignment.

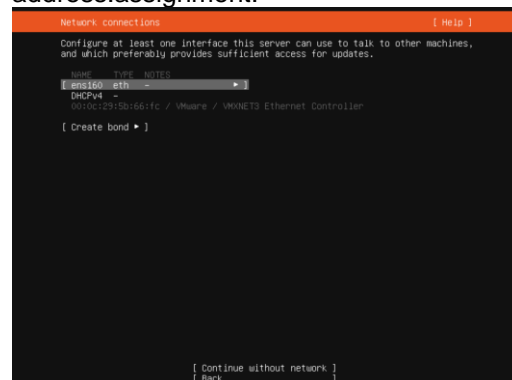


Step 7: Confirm interface selection with Enter, select "Edit IPv4" and confirm with Enter again.

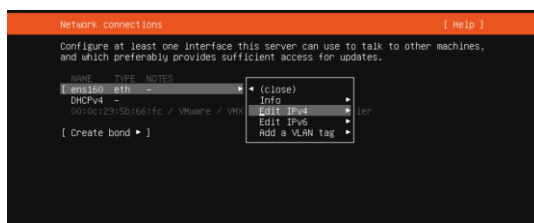


Step 8: Hit Enter on IPv4 Method and select "Manual", confirm with Enter.

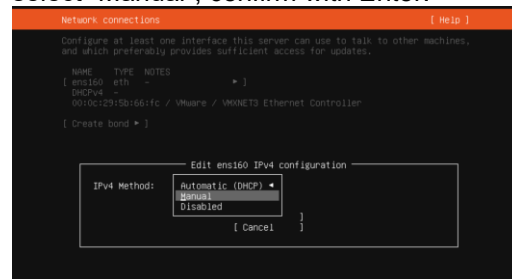


Step 9: Enter your “Subnet”, “IP Address”, “Gateway IP”, “Domain server IPs” and “Search domain”. Select “Save” and confirm with Enter. **NOTE, it is very important that your DNS (Name servers) will resolve Internet names.**

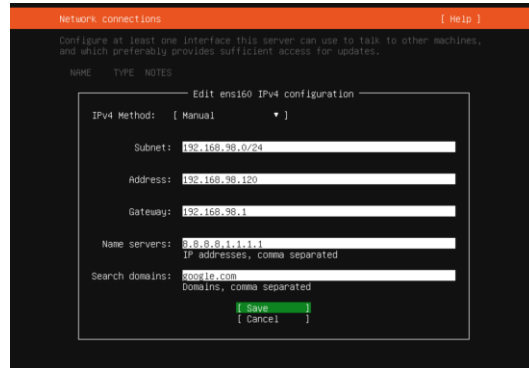


Step 10: Select “Done” and confirm with Enter

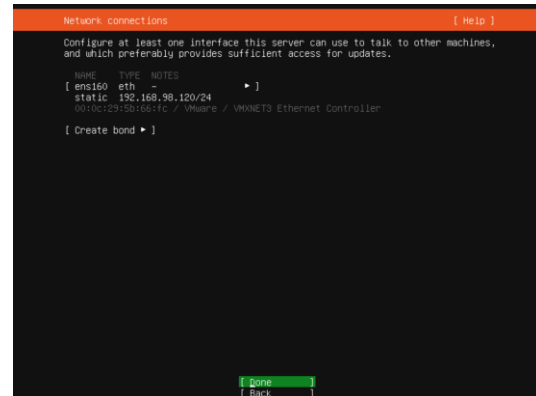

Step 11: If your DHCP IP settings are correct, select Done and confirm with Enter.

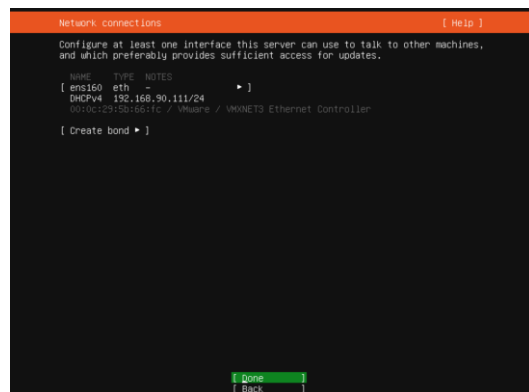

Step 12: If you have proxy in use for your internet, assign your network proxy settings. If no proxy in use, with Tab key select Continue and confirm with Enter.

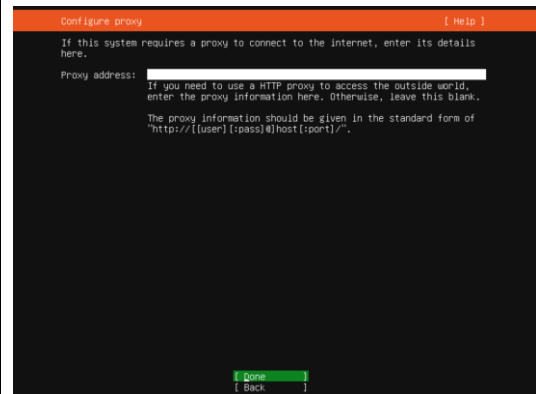

Step 13: Select [X] “Use an entire disk” and [X] Set up this disk as and LVM group confirm with Enter. For advnced (multi hdd as single LVM) setup it can be Custom storage option selected. For Custom storage selection, please refer to the

Step 14: Select “Continue” and confirm with Enter.

Ubuntu official documentation

Guided storage configuration [Help]

Configure a guided storage layout, or create a custom one:

(X) Use an entire disk

[/dev/sda local disk 150.0000 ▼]

(X) Set up this disk as an LVM group

[] Encrypt the LVM group with LUKS

Passphrase:

Confirm passphrase:

() Custom storage layout

[Done]

[Back]

Installing system [Help]

```
subiquity/SSH/load_autoinstall_data
subiquity/SnapList/load_autoinstall_data
subiquity/Timezone/load_autoinstall_data
subiquity/Updates/load_autoinstall_data
subiquity/Late/load_autoinstall_data
subiquity/Shutdown/load_autoinstall_data
subiquity/Early/apply_autoinstall_config
subiquity/Reporting/apply_autoinstall_config
```

Confirm destructive action

Selecting Continue below will begin the installation process and result in the loss of data on the disks selected to be formatted.

You will not be able to return to this or a previous screen once the installation has started.

Are you sure you want to continue?

[No]

[Continue]

```
subiquity/SSH/apply_autoinstall_config
subiquity/SnapList/apply_autoinstall_config
subiquity/Timezone/apply_autoinstall_config
subiquity/Updates/apply_autoinstall_config
subiquity/Late/apply_autoinstall_config
subiquity/Early/apply_autoinstall_config
subiquity/Reporting/cnd-apt-config: curtin command apt-config
```

Step 15: Confirm your HDD configuration Done/Enter

Storage configuration [Help]

FILE SYSTEM SUMMARY

MOUNT POINT	SIZE	TYPE	DEVICE TYPE
[/]	73.9960	new ext4	new LVM logical volume
[/boot]	2.0000	new ext4	new partition of local disk

AVAILABLE DEVICES

DEVICE	TYPE	SIZE
[ubuntu-vg (new)]	LVM volume group	147.9960
free space		74.0000
[/dev/sdb]	local disk	250.0000
free space		249.9980

[Create software RAID (md) ▶]

[Create volume group (LVM) ▶]

USED DEVICES

DEVICE	TYPE	SIZE
[ubuntu-vg (new)]	LVM volume group	147.9960
ubuntu-vg new, to be formatted as ext4, mounted at /		73.9960
[/dev/sda]	local disk	150.0000
partition 1 new, BIOS grub spacer		1.0000
partition 2 new, to be formatted as ext4, mounted at /boot		2.0000

[Done]

[Reset]

[Back]

Step 16: Select "Continue" and confirm with Enter.

Installing system [Help]

```
subiquity/SSH/load_autoinstall_data
subiquity/SnapList/load_autoinstall_data
subiquity/Timezone/load_autoinstall_data
subiquity/Updates/load_autoinstall_data
subiquity/Late/load_autoinstall_data
subiquity/Shutdown/load_autoinstall_data
subiquity/Early/apply_autoinstall_config
subiquity/Reporting/apply_autoinstall_config
```

Confirm destructive action

Selecting Continue below will begin the installation process and result in the loss of data on the disks selected to be formatted.

You will not be able to return to this or a previous screen once the installation has started.

Are you sure you want to continue?

[No]

[Continue]

```
subiquity/SSH/apply_autoinstall_config
subiquity/SnapList/apply_autoinstall_config
subiquity/Timezone/apply_autoinstall_config
subiquity/Updates/apply_autoinstall_config
subiquity/Late/apply_autoinstall_config
subiquity/Early/apply_autoinstall_config
subiquity/Reporting/cnd-apt-config: curtin command apt-config
```

Step 17: Fill the **non-root user** profile following by Done/Enter

Profile setup [Help]

Enter the username and password you will use to log in to the system. You can configure SSH access on the next screen but a password is still needed for sudo.

Your name:

Your server's name:
The name it uses when it talks to other computers.


Pick a username:

Choose a password:


Confirm your password:

[Done]


Step 18: Skip Ubuntu Pro installation Continue confirm with Enter.

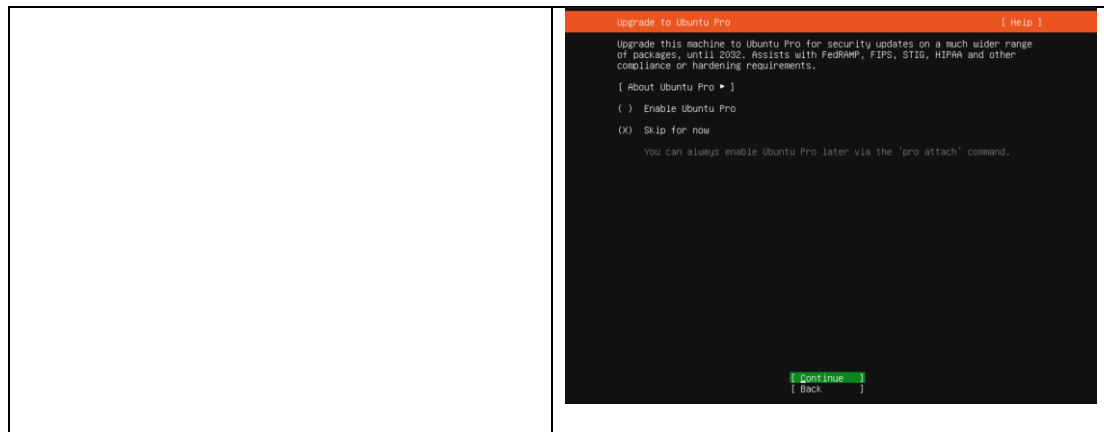


Step 19: Select [X] “Install OpenSSH Server” and confirm Done/Enter.

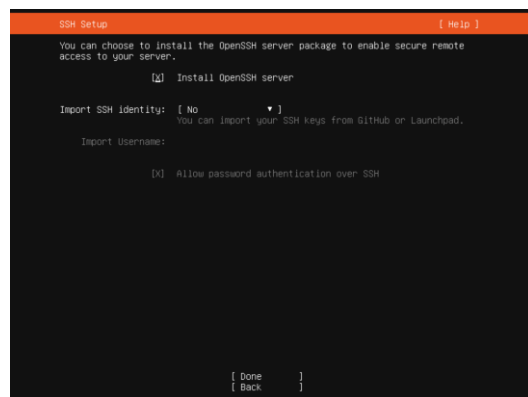


Step 20: Select “Continue” and confirm with Enter.

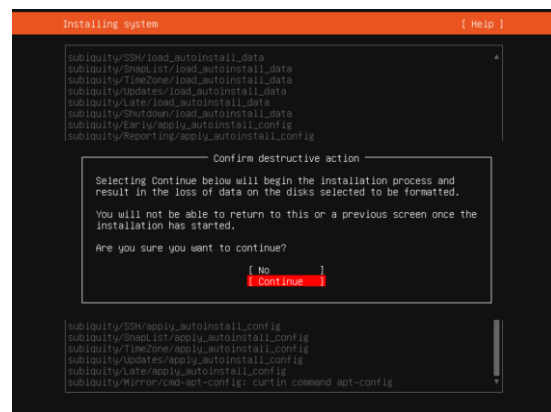

Step 21: DO NOT Select any other services confirm Done/Enter.

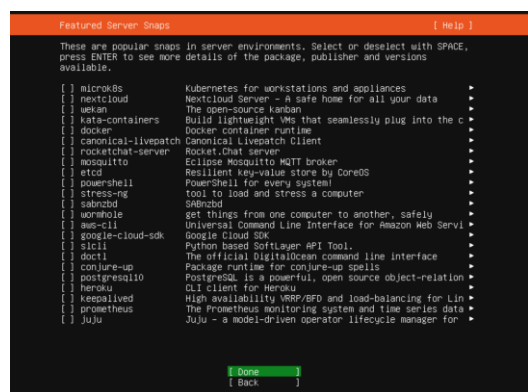

Step 22: Select “Continue” and confirm with Enter.

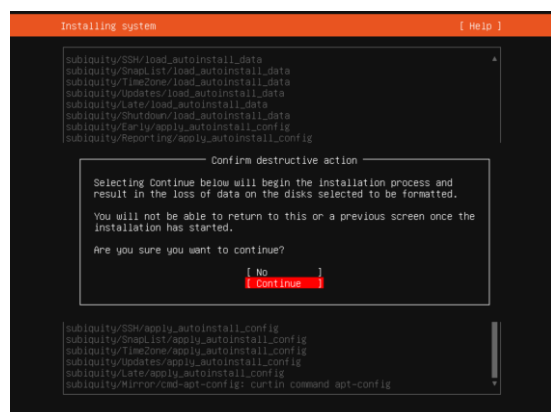

Step 23: After the Ubuntu “Install Complete” select “Reboot Now” and hit Enter to continue.

Step 24: Remove CD/DVD ISO Media following by Enter.

Step 25: Login into your Ubuntu server with previously created non-root user: eveuser/test123

Step 26: IMPORTANT: Set root user password, Example:

```
sudo su
test123
passwd root
eve
eve
```

Step 26: Allow permissions for root administrator user SSH to your server.

```
nano /etc/ssh/sshd_config
Edit to: PermitRootLogin yes
ctrl+o Enter for save
ctrl+x for exit
restart ssh service
service sshd restart
```

Step 27: IMPORTANT: Set root user password, Example:

```
sudo su
test123
passwd root
eve
eve
```

<pre># OpenBSD: sshd_config,v 1.101 2017/03/14 07:19:07 djm Exp # # This is the sshd server system-wide configuration file. See # sshd_config(5) for more information. # This sshd was compiled with PATH=/usr/bin:/bin:/usr/sbin:/sbin # The strategy used for options in the default sshd_config shipped with # OpenSSH is to specify options with their default value where # possible, but leave them commented. Uncommented options override the # default value. #Port 22 #AddressFamily any #ListenAddress 0.0.0.0 #ListenAddress :: #HostKey /etc/ssh/ssh_host_rsa_key #HostKey /etc/ssh/ssh_host_ecdsa_key #HostKey /etc/ssh/ssh_host_ed25519_key # Ciphers and keying #KexAlgorithms default none # Logging #SyslogFacility AUTH #LogLevel INFO # Authentication: #AuthenticationGraceTime 2m #PermitRootLogin yes</pre>	<pre>eveuser@eve-ng:~\$ sudo su [sudo] password for eveuser: root@eve-ng:/home/eveuser# cd root@eve-ng:~# sudo passwd root New password: Retype new password: passwd: password updated successfully root@eve-ng:~# _</pre>
---	--

EVE Installation Phase 2 (EVE installation)

<p>Step 28: SSH to your EVE IP using Putty or other SSH client. Log in as root user execute:</p> <pre>apt update apt upgrade</pre>	
<p>Step 29: Run EVE CE online installation script. (it is single line command below)</p> <pre>wget -O - https://www.eve-ng.net/focal/install-eve.sh bash -i</pre> <p>At the end of eve server installation, reboot eve</p>	

EVE Installation Phase 3 (Management IP setup and updates)

<p>Step 30: After reboot SSH to your EVE IP as root and Setup EVE Management IP address. A Static IP address for BM setup is preferred.</p> <p>Follow steps in section : 3.5.1 for static IP, 3.5.2 for DHCP IP</p>	<p>Step 31: After your EVE is rebooted, Login to EVE CLI and type:</p> <pre>apt update apt upgrade</pre>
---	--

Verification: Verify your EVE-NG server installation, type “dpkg -l eve-ng” command, it must display latest EVE CE version

```
root@eve-ng:~# dpkg -l eve-ng
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                               Version                               Architecture
Description
```


```
+++=====
=====
ii  eve-ng                    5.0.1-XX                    amd64                    A
new generation software for networking labs.
root@eve-ng:~#
```

3.4 Google Cloud Platform

3.4.1 Google account

Step 1: Connect to Google Cloud Platform (GCP)

<https://console.cloud.google.com/getting-started>

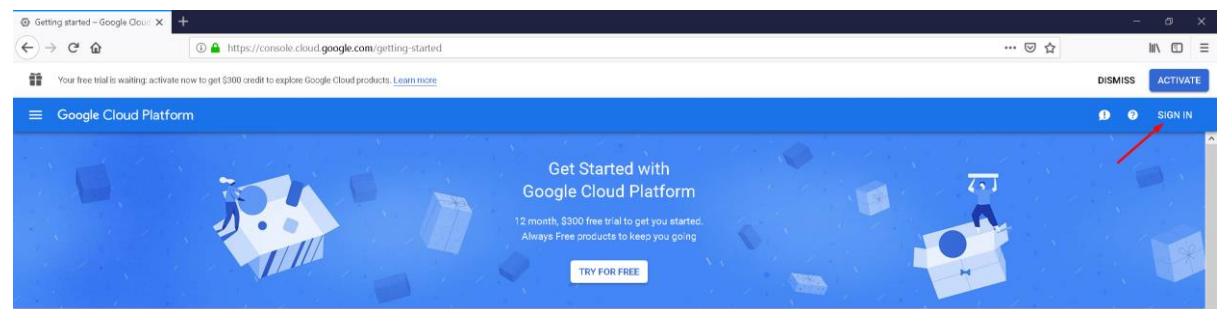


Step 2: Sign into GCP. Create a new GCP account if you do not already have one.


3.4.2 Google Cloud project

Create new project. By default, GCP will offer you a project named "My First Project". It can be used as well.

Step 1. GCP top bar, click on "My First Project"



Step 2. Next pop up window, click "NEW PROJECT"

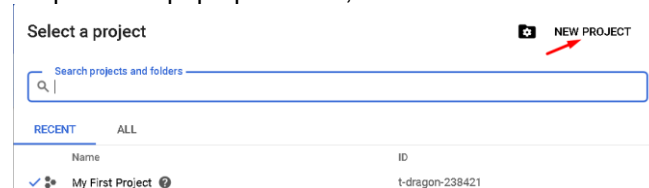

Step 3. Enter your project name, and confirm "CREATE"

Google Cloud Platform

Search resources and products

New Project

⚠ You have 22 projects remaining in your quota. Request an increase or delete projects. [Learn more](#)

[MANAGE QUOTAS](#)

Project name *

EVE Test

?

Project ID: eve-test-276509. It cannot be changed later. [EDIT](#)

Location *

No organisation

BROWSE

Parent organisation or folder

CREATE

CANCEL

This will take some time.

3.4.3 Preparing Ubuntu boot disk template

Step 1: Open the google cloud shell and press: “START CLOUD SHELL”

The screenshot shows the Google Cloud Platform console. At the top, the 'START CLOUD SHELL' button is highlighted with a red arrow. Below the console, a terminal window is open, showing the Cloud Shell interface with the project ID 'eve-test-276509' and a prompt for commands.

Step 2: create a nested Ubuntu 20.04 image model. Copy and paste the below command into the shell. Use copy/paste. ctrl +c/ctrl +v. **It is single line command.** Confirm with “enter”:

```
gcloud compute images create nested-ubuntu-focal --source-image-family=ubuntu-2004-lts --source-image-project=ubuntu-os-cloud --licenses https://www.googleapis.com/compute/v1/projects/vm-options/global/licenses/enable-vmx
```


```
Welcome to Cloud Shell! Type "help" to get started.
Your Cloud Platform project in this session is set to eve-test-276509.
Use "gcloud config set project [PROJECT_ID]" to change to a different project.
uidis.dzarkais@cloudshell:~$ gcloud compute images create nested-ubuntu-focal --source-image-family-ubuntu-2004-lts --source-image-project-ubuntu-os-cloud --licenses https://www.googleapis.com/compute/v1/projects/eve-test-276509/global/licenses/enable-vmx
NAME: nested-ubuntu-focal
PROJECT: eve-test-276509
FAMILY:
DEPRECATED:
STATUS: READY
uidis.dzarkais@cloudshell:~$ (eve-test-276509)$
```

You will get the following output when your image is ready:

```
Welcome to Cloud Shell! Type "help" to get started.
Your Cloud Platform project in this session is set to eve-test-276509.
Use "gcloud config set project [PROJECT_ID]" to change to a different project.
uidis.dzarkais@cloudshell:~$ (eve-test-276509)$ gcloud compute images create nested-ubuntu-focal --source-image-family-ubuntu-2004-lts --source-image-project-ubuntu-os-cloud --licenses https://www.googleapis.com/compute/v1/projects/eve-test-276509/global/licenses/enable-vmx
Created [https://www.googleapis.com/compute/v1/projects/eve-test-276509/global/licenses/enable-vmx].
NAME: nested-ubuntu-focal
PROJECT: eve-test-276509
FAMILY:
DEPRECATED:
STATUS: READY
uidis.dzarkais@cloudshell:~$ (eve-test-276509)$
```

3.4.4 Creating VM

Step 1: Navigate: Navigation Menu/Compute Engine/VM Instances and press “Create”

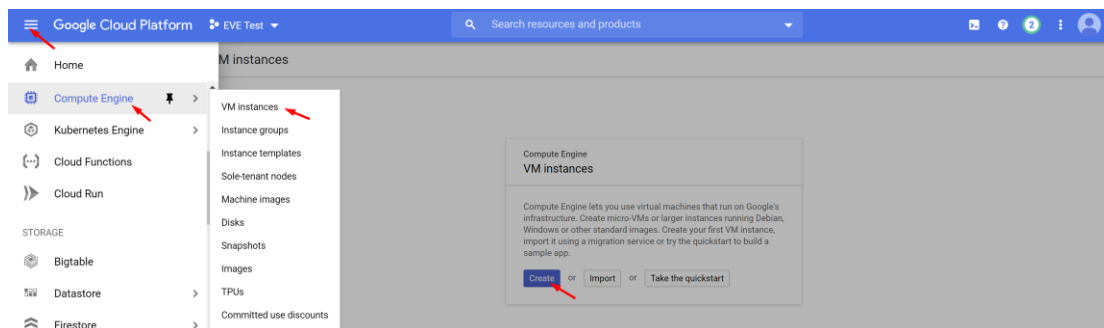

Step 2: Assign the name for your VM

Step 3: Set your own region and zone

Step 4: Edit your Machine Configuration. General-Purpose. Choose the series of CPU platform, Preferred are **Intel CPUs Skylake or Cascade**.

Step 5: Choose your desirable CPU and RAM settings.
IMPORTANT: “Deploy a container image” must be **UNCHECKED**.

Name *
eve-com-5

Labels ?

+ ADD LABELS

Region *
europe-west2 (London)

Region is permanent

Zone *
europe-west2-c

Zone is permanent

Machine configuration

Machine family

GENERAL-PURPOSE

COMPUTE-OPTIMISED

MEMORY-OPTIMISED

GPU

Machine types for common workloads, optimised for cost and flexibility

Series
N2

Powered by Intel Cascade Lake and Ice Lake CPU platforms

Machine type
n2-standard-4 (4 vCPU, 16 GB memory)



vCPU

4

Memory

16 GB

✓ CPU PLATFORM AND GPU

Display device

Enable to use screen capturing and recording tools.

☐ Enable display device

Step 6: Select Boot disk. Press Change

Boot disk ?

Name	eve-com-5
Type	New balanced persistent disk
Size	10 GB
Image	Debian GNU/Linux 11 (bullseye)

CHANGE

Step 7. Select Custom images, Select Project (EVE-test) and the **custom boot images you created previously**. Choose HDD disk type and size. HDD size can vary depends of your needs.

Boot disk

Select an image or snapshot to create a boot disk, or attach an existing disk. Can't find what you're looking for? Explore hundreds of VM solutions in [Marketplace](#)

PUBLIC IMAGES
CUSTOM IMAGES
SNAPSHOTS
EXISTING DISKS

SELECT A PROJECT

Show images from: EVE Test

☐ Show deprecated images

Image *
nested-ubuntu-focal
Created on 21 May 2022, 10:10:47

Boot disk type *
SSD persistent disk

Size (GB) *
50

SHOW ADVANCED CONFIGURATION

SELECT CANCEL

Step 7: Allow **http** traffic and create VM

Identity and API access ?

Service account ?
Compute Engine default service account

Access scopes ?
☒ Allow default access
☐ Allow full access to all Cloud APIs
☐ Set access for each API

Firewall ?
Add tags and firewall rules to allow specific network traffic from the Internet.
☒ Allow HTTP traffic
☐ Allow HTTPS traffic



Management, security, disks, networking, sole tenancy

You will be billed for this instance. [Compute Engine pricing](#)

Create Cancel

3.4.5 EVE-NG-Community installation

Step 1: Click VM Instances to get access SSH to your VM, Connect to the VM with the first option “Open in browser window”

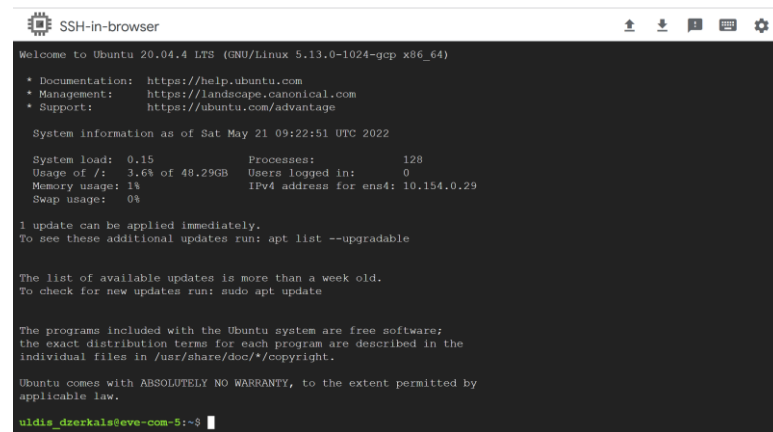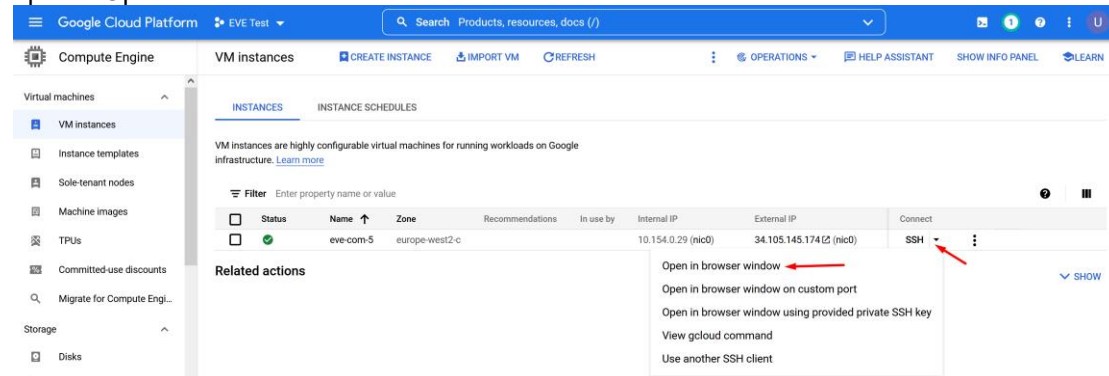

Step 2: Launch installation with:

Type the below command to become root:

```
sudo -i
```

Start EVE-COMM installation

```
wget -O - https://www.eve-ng.net/focal/install-eve.sh | bash -i
```


Step 3: Update and upgrade your new EVE-COMM

```
apt update
```

```
apt upgrade
```


Confirm with Y

Step 5. Reboot EVE. Allow some time for reboot and then press “Reconnect”

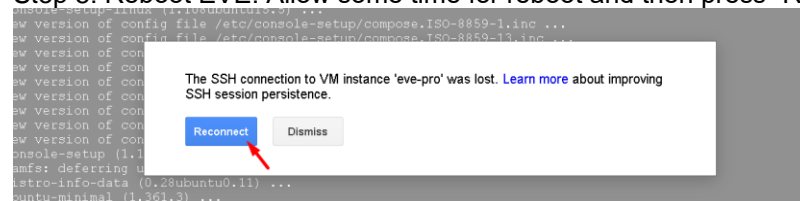

Step 6: **IMPORTANT:** Setup IP

Once the IP wizard screen appears, press **ctrl +c** and type the below command to become root:
`sudo -i`

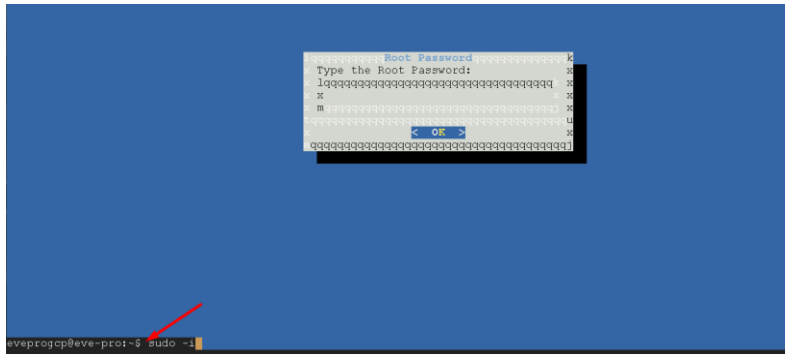


Now follow the IP setup wizard.
IMPORTANT: set IP as **DHCP**!

Step 6: Reboot

3.4.6 Access to Google Cloud EVE-COMM


Use your public IP for accessing EVE via **http**.

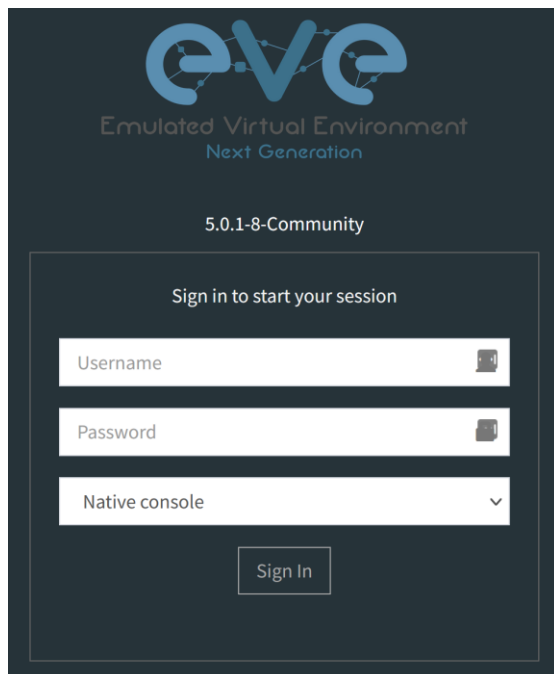


Default web login: **admin/eve**

3.4.7 Optional: GCP Firewall rules for native console use


Step 1: Navigate: Navigation menu/VPC Network/Firewall rules

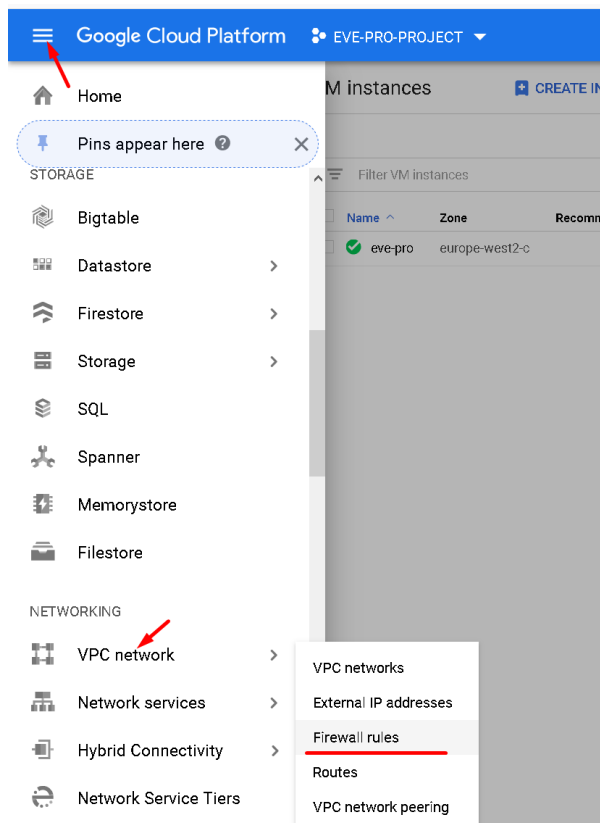

Step 2: Create new firewall rule

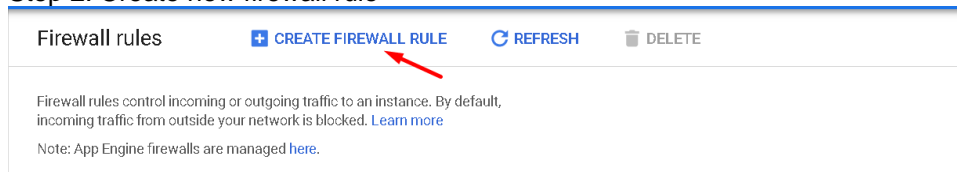

Step 3: Create an ingress FW rule; allow TCP ports 0-65535

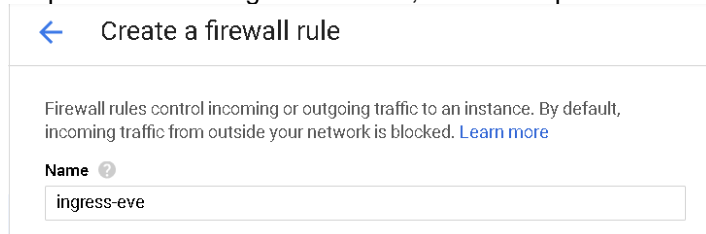

Direction of traffic ?
☒ Ingress
☐ Egress

Action on match ?
☒ Allow
☐ Deny

Targets ?
All instances in the network

Source filter ?
IP ranges

Source IP ranges ?
0.0.0.0/0

Second source filter ?
None

Protocols and ports ?
☐ Allow all
☒ Specified protocols and ports

☒ tcp : 0-65535
☐ udp : all
☐ Other protocols
protocols, comma separated, e.g. ah, scp

[Disable rule](#)

Create **Cancel**

Step 4: Create an egress FW rule; allow TCP ports 0-65535

Firewall rules control incoming or outgoing traffic to an instance. By default, incoming traffic from outside your network is blocked. [Learn more](#)

Name ?
egress-eve

Direction of traffic ?
☐ Ingress
☒ Egress

Action on match ?
☒ Allow
☐ Deny

Targets ?
 All instances in the network

Destination filter ?
 IP ranges

Destination IP ranges ?
 0.0.0.0/0

Protocols and ports ?
☐ Allow all
☒ Specified protocols and ports

☒ tcp : 0-65535
☐ udp : all
☐ Other protocols
 protocols, comma separated, e.g. ah, sctp

⌵ Disable rule

Create Cancel

Summary FW rules.

<input type="checkbox"/>	Name	Type	Targets	Filters	Protocols / ports	Action	Priority	Network ^
<input type="checkbox"/>	egress-eve	Egress	Apply to all	IP ranges: 0.0.0.0/0	tcp:0-65535	Allow	1000	default
<input type="checkbox"/>	default-allow-https	Ingress	https-server	IP ranges: 0.0.0.0/0	tcp:443	Allow	1000	default
<input type="checkbox"/>	ingress-eve	Ingress	Apply to all	IP ranges: 0.0.0.0/0	tcp:0-65535	Allow	1000	default

3.5 EVE Management IP Address setup


3.5.1 Management static IP address setup (preferred)


The steps below will walk you through the network setup and assign a static management IP for EVE.

Step 1: Log into the EVE CLI using the default login **root/eve**. After login, type your preferred root password for EVE, default is **eve**. **Remember it for further use.** Confirm with enter


NOTE: Typed characters in the password field are not visible.

Step 2: Retype your root password again and confirm with enter.

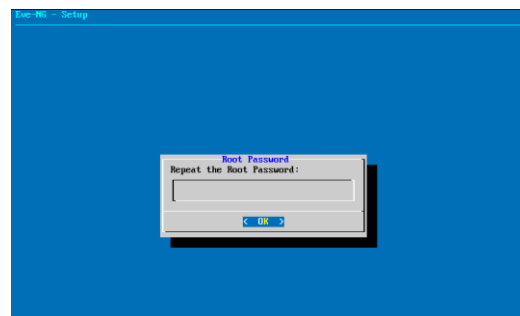


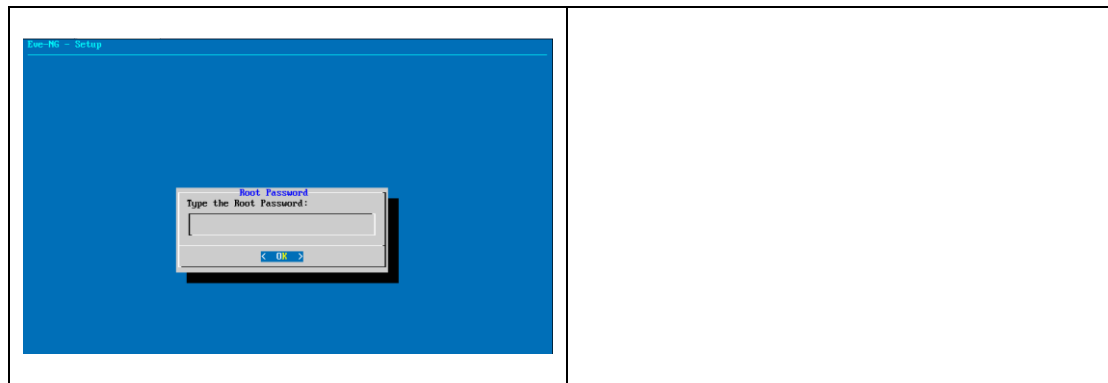


Step 3: Choose your EVE VMs hostname. By default, it is **eve-ng**. You can leave it as it is. Confirm with enter

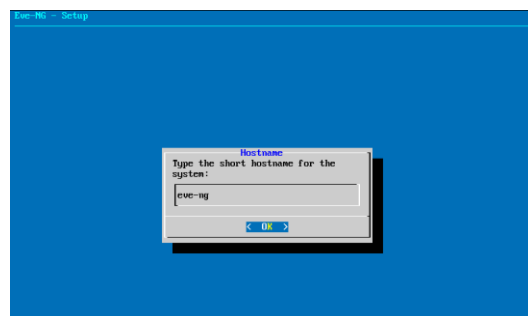


Step 4: Type your domain name for your EVE VM. By default, it is example.com. The default value can be used as well. Confirm with enter

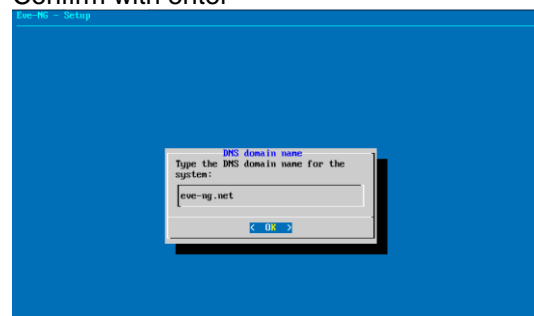


Step 5: Using the arrow keys, select the option "static", confirm your selection with the space key, followed by enter

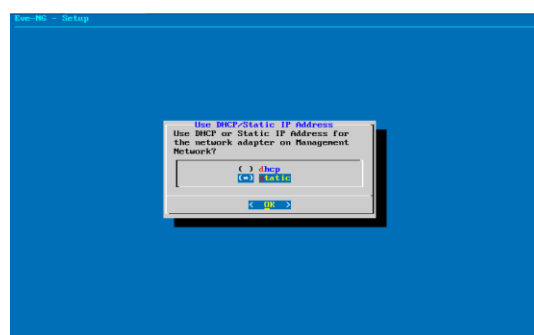


Step 6: Type your desirable EVE management IP. Confirm with enter.

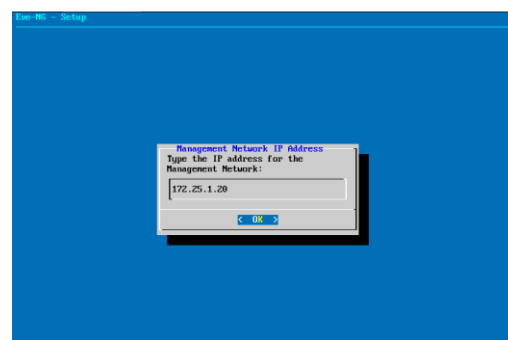


Step 7: Type the subnet mask of your EVE management network. Confirm with enter.

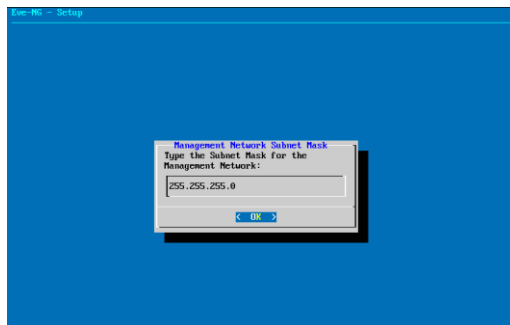


Step 8: Type your networks gateway IP. Confirm with enter.

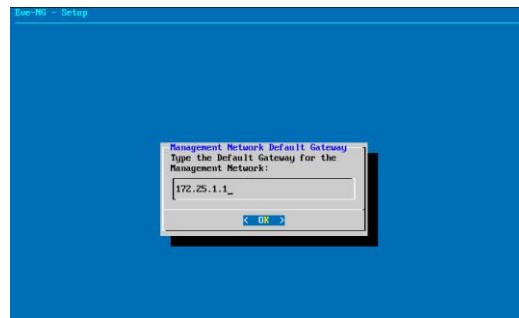


Step 9: Type your networks primary DNS IP. Confirm with enter.
IMPORTANT: DNS must be reachable and resolve public addresses.

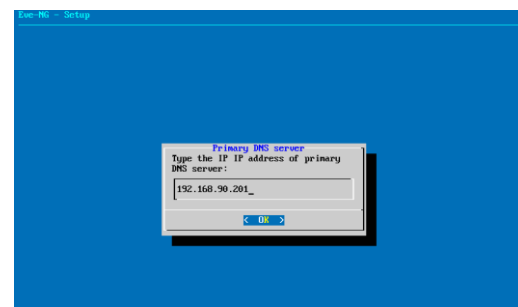


Step 10: Type your network Secondary DNS IP. Confirm with Enter.
IMPORTANT: DNS must be reachable and resolve public addresses.

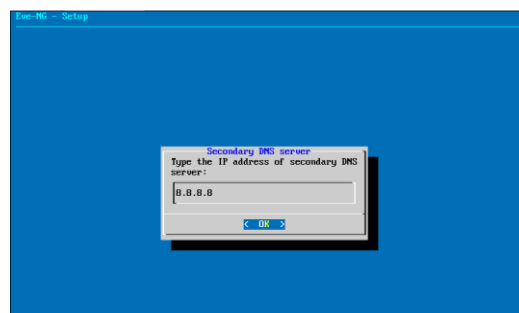

Step 11: Type your preferred NTP server IP. It can be left empty as well; in this case, your EVE VM will automatically assign the time from its host.

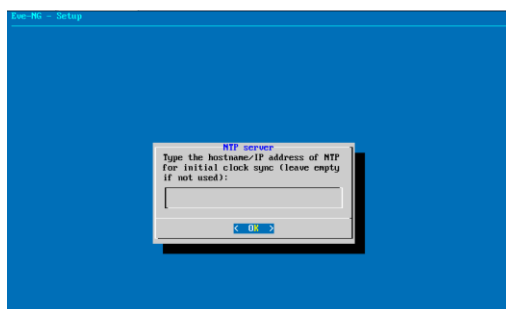

Step 12: If you have a proxy in use for your Internet, select the respective proxy option and configure your proxy settings. By default, it is direct connection (no proxy). Confirm your selection with enter. EVE will reboot automatically.

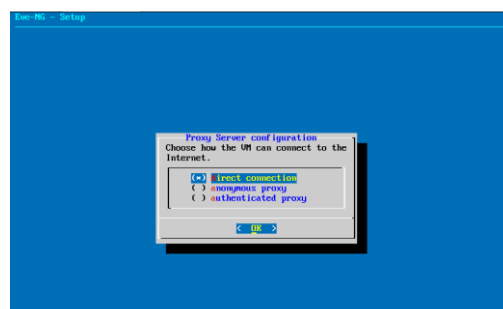


⚠ IMPORTANT NOTE: If you are setting up your management IP for the first time (fresh EVE installation), please return to the install section and complete installation phase 3.

3.5.2 EVE Management IP address setup via DHCP


The steps below will walk you through the network setup and assign a management IP for EVE via DHCP.

Step 1: Log into the EVE CLI using the default login **root/eve**. After login, type your preferred root password for EVE, default is **eve**. **Remember it for further use.** Confirm with enter


NOTE: Typed characters in the password field are not visible.

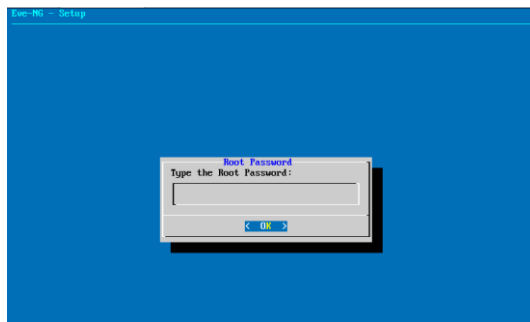


Step 2: Retype your root password again and confirm with enter.

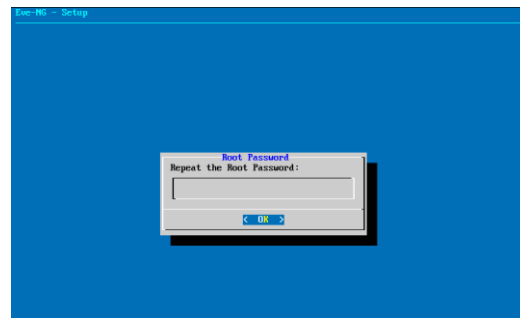


Step 3: Choose your EVE VMs hostname. By default, it is **eve-ng**. You can leave it as it is. Confirm with enter

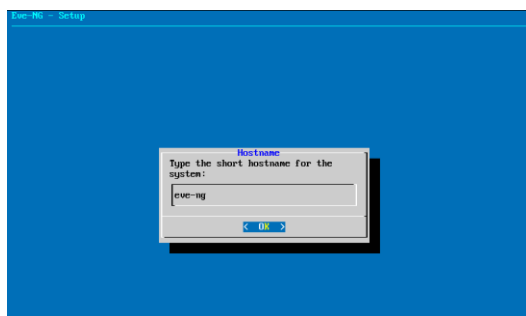


Step 4: Type your domain name for your EVE VM. By default, it is example.com. The default value can be used as well. Confirm with enter

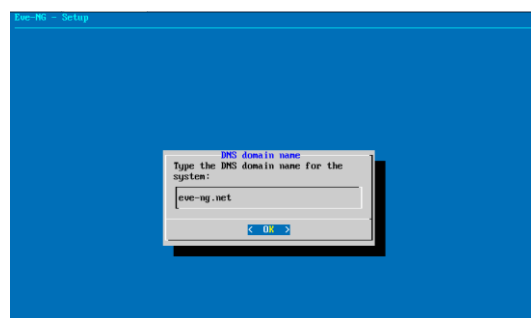


Step 5: Using the arrow keys, select the option “dhcp”, confirm your selection with the space key, followed by enter

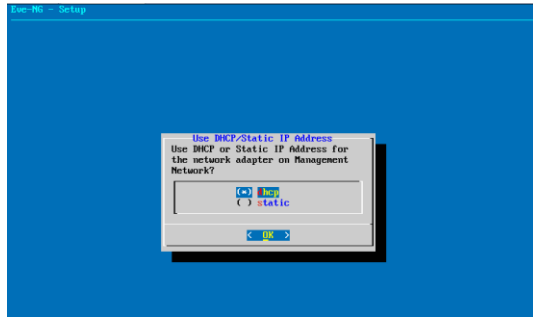

Step 6: Type your preferred NTP server IP. It can be left empty as well; in this case, your EVE VM will automatically assign the time from its host.

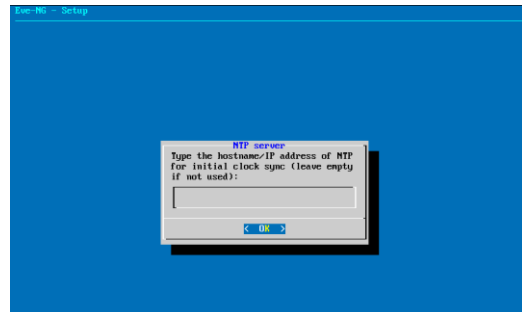

Step 7: If you have a proxy in use for your Internet, select the respective proxy option and configure your proxy settings. By default, it is direct connection (no proxy). Confirm your selection with enter. EVE will reboot automatically.

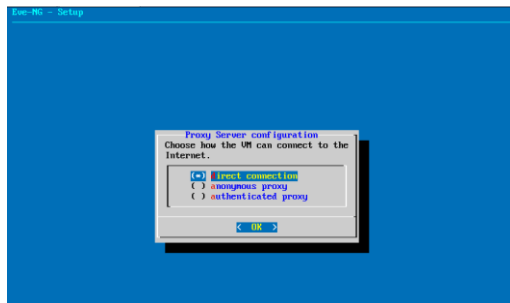

⚠ IMPORTANT NOTE: If you are setting up your management IP for the first time (fresh EVE installation), please return to the install section and complete installation phase 3.

3.5.3 EVE Management IP address reset

If for any reason you need to change these settings after the installation, you can rerun the IP setup wizard. Type the following command in the CLI and hit enter:

```
rm -f /opt/ovf/.configured
```

Then reboot. Once you log into the CLI again, EVE will go through the network setup again. Please follow the steps in section [3.5.1](#) for Static IP or [3.5.2](#) for DHCP IP.

3.6 EVE-NG Community upgrade to EVE-NG Professional

3.6.1 Mandatory Prerequisites

⚠ Mandatory Prerequisites: Internet must be reachable from your PC and VMware. EVE ISO installation requires internet access to get updates and install the latest EVE-PRO version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com

3.6.1.1 EVE Community disk space

You must have enough HDD space available. The main eve-ng--vg-root partition must have at least 10GByte free space while the boot partition must have at least 50Mbyte. To check how much space is available on your HDD, enter the following command into the CLI of EVE:

```
df -h
```

```
root@eve-ng:~# df -h
Filesystem      Size  Used Avail Use% Mounted on
udev            7.9G   0    7.9G   0% /dev
tmpfs           1.6G  22M   1.6G   2% /run
/dev/mapper/eve-ng--vg-root 71G   29G   38G  44% /
tmpfs           7.9G   0    7.9G   0% /dev/shm
tmpfs           5.0M   0    5.0M   0% /run/lock
tmpfs           7.9G   0    7.9G   0% /sys/fs/cgroup
/dev/sda1       472M  155M  294M  35% /boot
root@eve-ng:~#
```

To free up space on the /boot, enter the following command, hit enter and confirm with “y”

```
apt autoremove
```

3.6.1.2 Verify current EVE Community version


You have to make sure that your EVE Community Edition is of version (v2.0.3-86) or later. You must be able to reach the internet from your PC, VMware or Server.

To check your current EVE-NG version, enter the following command

```
dpkg -l eve-ng
```

```
root@eve-ng:~# dpkg -l eve-ng
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name          Version          Architecture Description
+++-+
ii  eve-ng          2.0.3-86         amd64        A new generation software for network
root@eve-ng:~#
```

You can also verify your current EVE version from the WEB GUI. Top menu bar, System, System status.

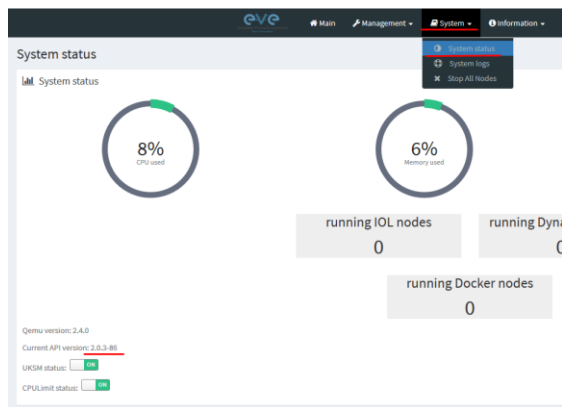

You can check the version number of the newest currently available Community version on the EVE-NG Community site: <http://www.eve-ng.net/community>.

3.6.1.3 Steps to upgrade to the latest EVE Community version

Type the following commands below and hit enter after each.

```
apt update
```

In case of any Y/N prompt, answer Yes.

```
apt upgrade
```

In case of any Y/N prompt, answer Yes.

```
reboot
```

3.6.2 Upgrading EVE Community to EVE-NG Professional

⚠ WARNING: Please be ready to purchase a license when upgrading, as you will not be able to start any nodes until a valid license has been activated on your EVE.

To upgrade to EVE-NG Pro, issue the following commands into the CLI of EVE followed by enter.

```
apt update
```

```
apt install eve-ng-pro
```

```
reboot
```

After the reboot continue with the below commands, followed by enter

```
apt update
```

```
apt install eve-ng-dockers
```




```
reboot
```

Continue to the EVE-NG Pro license purchase section of the website and follow the remaining instructions.

3.7 Native telnet console management setup

If you prefer to use a natively installed telnet client to manage nodes inside EVE, follow the steps below:

3.7.1 Windows Native Console
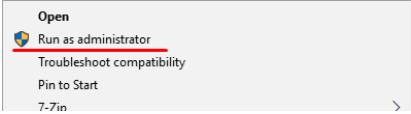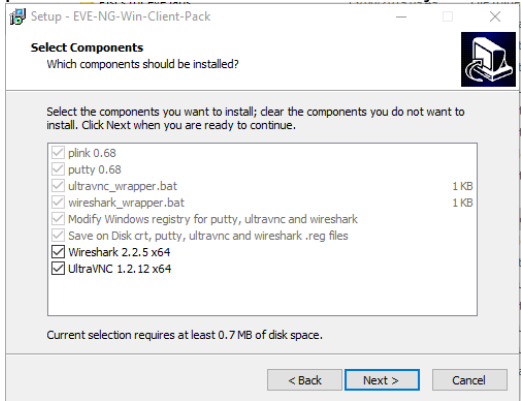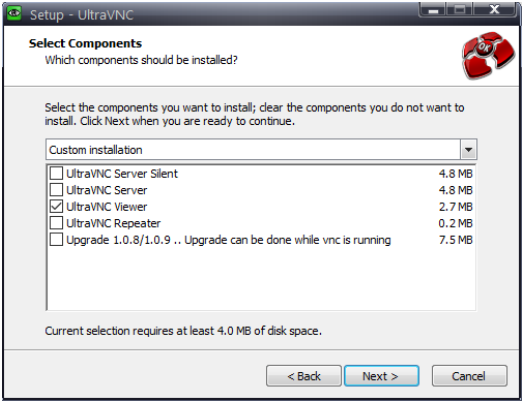
<p>Step 1: Download the EVE Windows Client integration pack:</p> <p>http://www.eve-ng.net/downloads/windows-client-side-pack</p>	<p>Step 2: Install it as administrator</p> 
<p>Step 3: Leave the option for UltraVNC checked. UltraVNC is very tiny and the preferred VNC client for Windows by EVE.</p> 	<p>Step 4: Continue with Next. When it asks to choose Ultra VNC Options, only leave the UltraVNC Viewer checked, the rest is not needed.</p> 
<p>Step 5: Continue with Next and finish the installation.</p>	

By default, EVE Windows Client Integration will install **Putty** as your Telnet Client. The default location for the EVE Windows Client Integration software and .reg files is: "C:\Program Files\EVE-NG"

Set the default telnet program manually in Windows 10. Example: SecureCRT

Step 1: Go to: Windows Settings/Apps/Default Apps/Choose Default Apps by Protocol

Step 2: Set your default Telnet program:


TELNET
URL:Telnet Protocol



NOTE: The first time click on the type of link that is used to access a running node inside EVE via telnet, the browser will ask to choose the telnet program. If you have

prepared your default telnet program with the instructions above, you have to choose your default Telnet program.

Example: Firefox browser:

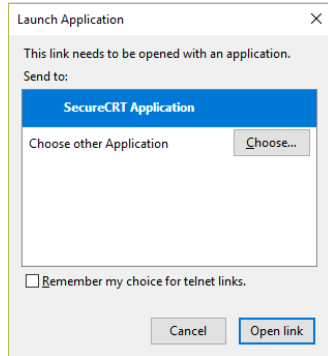

Set your default application, check the box “Remember my choice telnet links” and click Open link

3.7.2 Linux Native Console

The steps below will show how to setup the native consoles pack for Linux Mint 18 (Ubuntu):


<p>Step 1: Go to the EVE Linux Side integration pack download page:</p> <p>http://www.eve-ng.net/downloads/linux-client-side</p>	<p>Step 2: Open the link to GitHub</p> <p>https://github.com/SmartFinn/eve-ng-integration</p>
<p>Step 3: Scroll down to the installation part</p> <p>Installation</p> <p>Ubuntu and derivatives</p> <p>You can install eve-ng-integration from the official PPA:</p> <pre>sudo add-apt-repository ppa:smartfinn/eve-ng-integration sudo apt-get update sudo apt-get install eve-ng-integration</pre>	
<p>Step 4: Login as root to your Linux system and enter the commands below:</p> <p>NOTE: An internet connection is required. Enter each command line below one after the other</p> <pre>sudo add-apt-repository ppa:smartfinn/eve-ng-integration</pre> <pre>sudo apt-get update</pre> <pre>sudo apt-get install eve-ng-integration</pre>	

⚠ For other Linux native console setup options please refer to:
<https://github.com/SmartFinn/eve-ng-integration>


3.7.3 MAC OSX Native Console

Telnet Protocol:

OSX Sierra (and older releases) is ready to use for the telnet protocol.

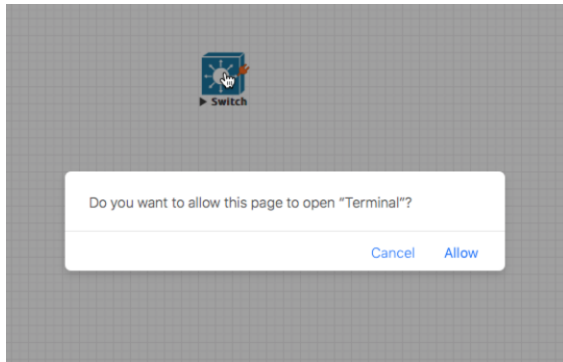

For High Sierra, a telnet binary must be added (Apple decided to remove it and it is not present anymore on the latest OSX releases).

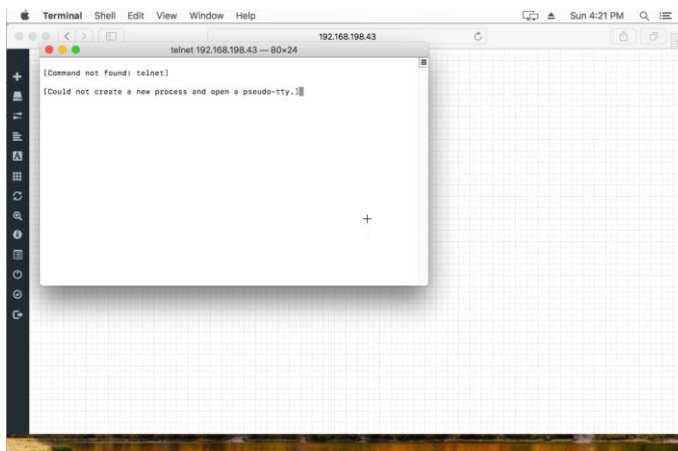

Procedure to install a previous telnet binary:

Download telnet and ftp binaries from eve:

http://your_eve_ip/files/osx.zip (to be updated) Please contact to EVE Live chat for this package.

Step 1: Reboot the Mac and hold down the "Command" and "R" key simultaneously after you hear the start-up chime, this will boot OSX into Recovery Mode


Step 2: When the "OSX Utilities" screen appears, pull down the 'Utilities' menu at the top of the screen instead, and choose "Terminal"

Step 3: Type the following command into the terminal then hit enter:

```
crutil disable; reboot
```

Step 4: When the OSX reboot is done, extract the osx.zip to your home directory

Step 5: Copy the files to /usr/bin and set the permissions using the terminal utility:

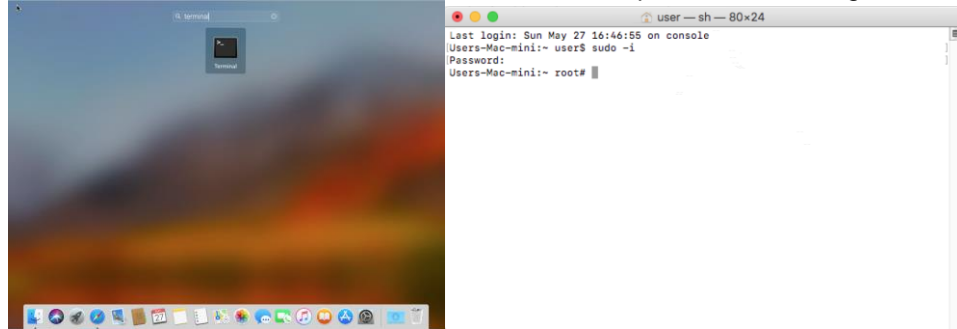

```
sudo -i
```

```
cp telnet ftp /usr/bin ; chmod 555 /usr/bin/telnet; chmod 555 /usr/bin/ftp
```

```
chown root:wheel /usr/bin/telnet /usr/bin/ftp
```

1. Reboot the Mac and hold down Command + R keys simultaneously after you hear the startup chime, this will boot OSX into Recovery Mode
2. When the "OSX Utilities" screen appears, pull down the 'Utilities' menu at the top of the screen instead, and choose "Terminal"

Type the following command into the terminal then hit enter:

```
crutil enable; reboot
```

VNC Protocol:

Download Chicken of VNC at: <https://sourceforge.net/projects/chicken/files/Chicken-2.2b2.dmg/download>

Install and use it as default VNC Client

RDP Protocol:

Download and install the Microsoft Remote Desktop on the App Store:



Microsoft Remote Desktop 10


Use the new Microsoft Remote Desktop app to connect to a remote PC or virtual apps and desktops made available by your administrator. The app helps you be productive no matter where you are.

Configure your PC for remote access first by downloading the Remote Desktop assistant to your PC and let it do the work for you...

What's New in Version 10.1.8

We've got some awesome updates in this release. In between several bug fixes, we've made the following noteworthy improvements:

Get

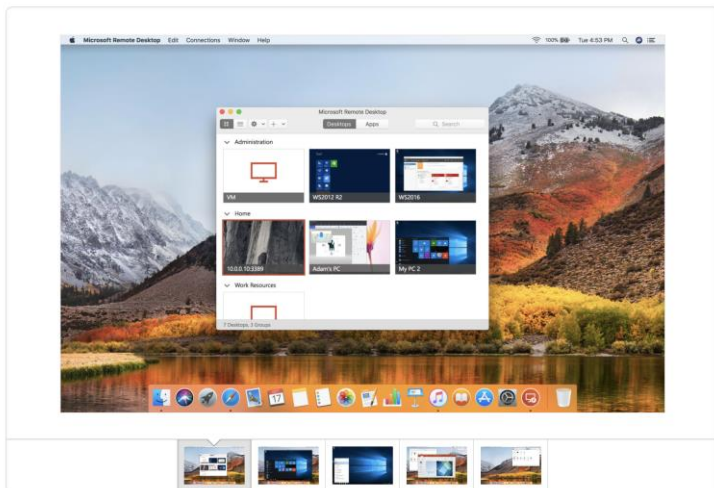

3.8 Login to the EVE WEB GUI

Login to the EVE management UI:

`http://<your_eve_ip>/`

Default user access:

User: **admin**

Password: **eve**

⚠ **NOTE:** You can change your EVE WEB Admin password, please refer to section **6.3.1.2**

⚠ **IMPORTANT NOTE:** You must prepare and upload at least a couple of images to start building your labs. Refer to section **12**

4 EVE-NG Community Update & Upgrade

 Prerequisites: Internet access and working DNS on your EVE-NG is required.

Verify your internet reachability with named ping. Example: ping www.google.com

```
ping www.google.com
```

```
root@eve-ng:~# ping www.google.com
PING www.google.com (216.58.207.228) 56(84) bytes of data:
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=1 ttl=58 time=9.11 ms
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=2 ttl=58 time=19.5 ms
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=3 ttl=58 time=9.50 ms
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=4 ttl=58 time=9.56 ms
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=5 ttl=58 time=9.56 ms
```

If your ping is success, follow next step for update. If named ping has no success, please verify your DNS IP assigned for EVE or firewall. Some cases ping can be blocked by FW, but Internet and DNS are capable to make update/upgrade.

OPTION for bare EVE installations which has **bnx2x Broadcom Ethernet** drivers, please rewrite your driver to the newest linux-firmware:

```
sudo apt-get -o Dpkg::Options::="--force-overwrite" install linux-firmware
```


⚠ IMPORTANT NOTE: before you start your EVE Community update & upgrade, please free up your EVE Community from older kernel packages:

```
apt autoremove
```

4.1 EVE-NG Community Update

It is strongly recommended to keep your EVE-NG up to date. To update and upgrade, SSH to your EVE CLI.

To verify your current EVE-NG version, please follow “CLI diagnostic information display commands” in section **11.1.1**. You can verify your current EVE version from the System/System Status tab on the top menu of the WEB GUI as well.

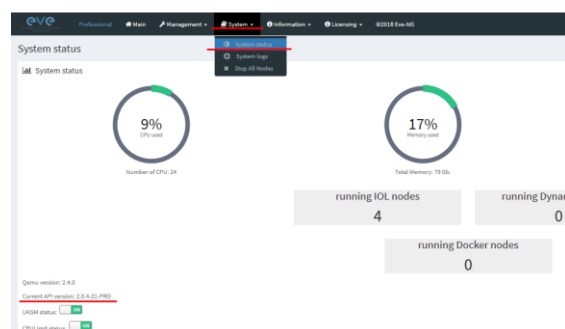

The newest version of EVE-NG can be verified by checking the official website: <http://www.eve-ng.net/community/community-2>. The main page will display the latest EVE-NG version and correct steps to update.



Type the below commands followed by Enter

```
apt update
```

In case the prompt asks to confirm with Y/N, answer Yes.


4.2 EVE-NG Community Upgrade

Type commands followed by Enter

```
apt upgrade
```

In case the prompt asks to confirm with Y/N, answer Yes.

⚠ IMPORTANT NOTE: If you are upgrading EVE Community from older version, the installation may ask you to confirm additional! Information:

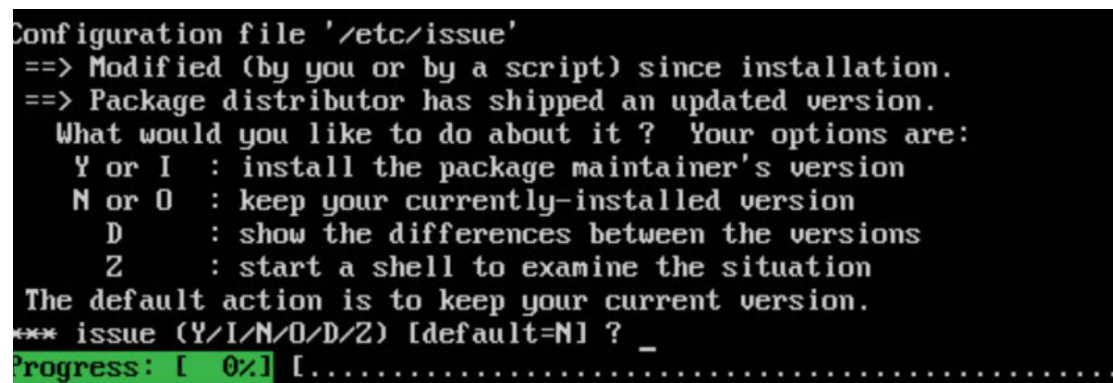

Answer for prompt above is “N”

```
Configuring grub-pc
A new version (/tmp/grub.tj7zRCnt3z) of configuration file /etc/default/grub is available,
but the version installed currently has been locally modified.

What do you want to do about modified configuration file grub?

install the package maintainer's version
keep the local version currently installed
show the differences between the versions
show a side-by-side difference between the versions
show a 3-way difference between available versions
do a 3-way merge between available versions (experimental)
start a new shell to examine the situation

<Ok>
```

Answer for grub-pc version is: **"Keep the local version currently installed"**

After the completion of the update and upgrade, reboot your EVE Server. Type the following command and hit enter.

```
reboot
```

5 Types of EVE management consoles

⚠ IMPORTANT NOTE: EVE Console TCP ports. EVE Community uses a static port range between 32678-40000.

Formula is = $32768 + 128 * \text{POD} + 1 \rightarrow 32768 + 128 * \text{POD} + 128$ POD: user id (admin = 0)
Example: you got admin (POD 0) + 2 users (POD 1, POD 2)
 $32768 + 128 * 0 + 1$ (First port for POD0) $\rightarrow 32768 + 128 * 2 + 128$ (Last port of POD 2) = 32769 \rightarrow 33152

Port per user pod:

POD	First Port	Last Port
0	32769	32896
1	32897	33024
2	33025	33152
3	33153	33280
4	33281	33408
5	33409	33536
6	33537	33664
7	33665	33792
8	33793	33920
9	33921	34048
10	34049	34176

EVE Community supports two different console types.

5.1 Native console




EVE Native console option requires locally installed software to access your lab nodes. To use the Native console option, you must have Administrator rights on your PC and ensure the TCP port range 32768-40000 is not blocked by a firewall or antivirus software. (See table above)

5.1.1 Native Console: telnet

Windows OS: You can use your preferred telnet program like Putty, SecureCRT or others.


Example: Putty as native telnet client on Windows.

To setup Windows native telnet client please follow section [3.7.1](#)

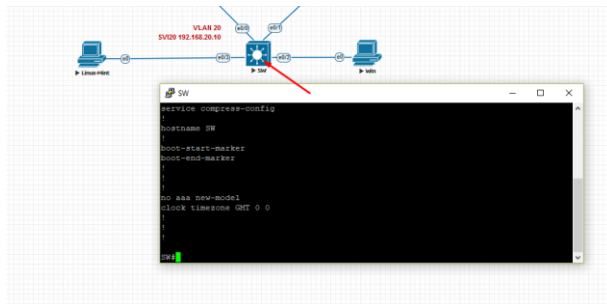

Linux OS: You can use your preferred telnet program like the Native Terminal, SecureCRT, or others.

Example: Telnet client from the native terminal on Linux Mint. To setup Linux native telnet client please follow section [3.7.2](#)

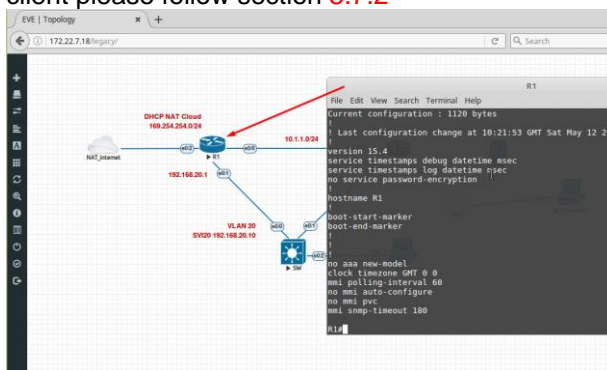


MAC OSX: You can use your preferred telnet program like the native Terminal, SecureCRT, or others.

Example: Telnet client from the native terminal on MAC OSX. To setup MAC OSX native telnet client please follow section [3.7.3](#)


5.1.2 Native Console: Wireshark

EVE Community has an integrated connection with natively installed Wireshark software on your PC. This allows live captures with Wireshark installed on the client machine. The EVE will capture natively installed Wireshark session.


IMPORTANT NOTE: Make sure you have installed Wireshark and EVE-NG client pack. It is strongly recommended if your Wireshark software is installed at your PC default location.

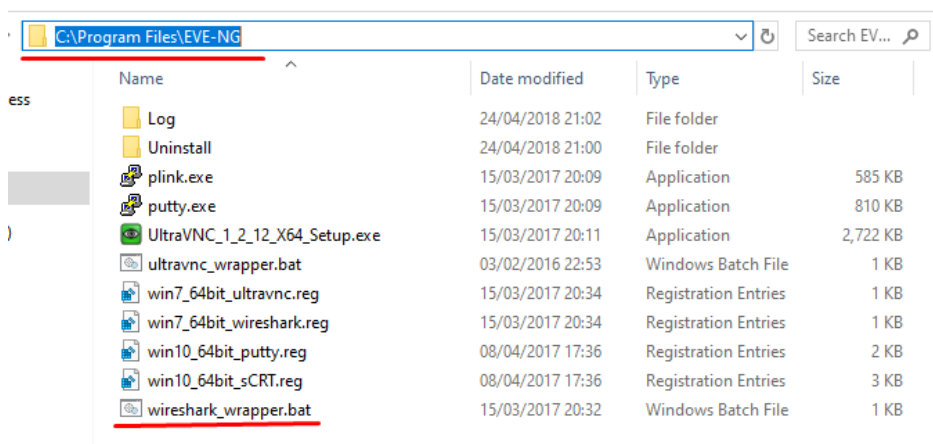

⚠ IMPORTANT NOTE: The Wireshark wrapper located in your PC station must match your EVE root password. Edit your EVE root password in the wireshark_wrapper.bat, if you had changed it during install.

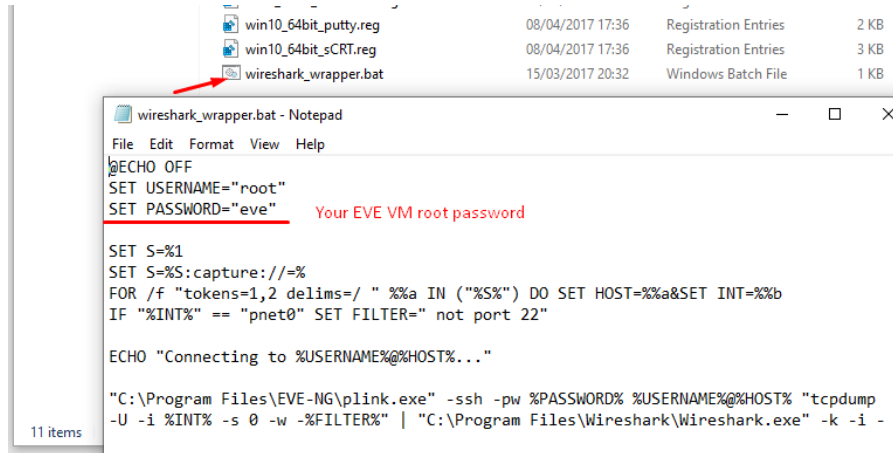


Example: Fortinet live interface port1 capture.

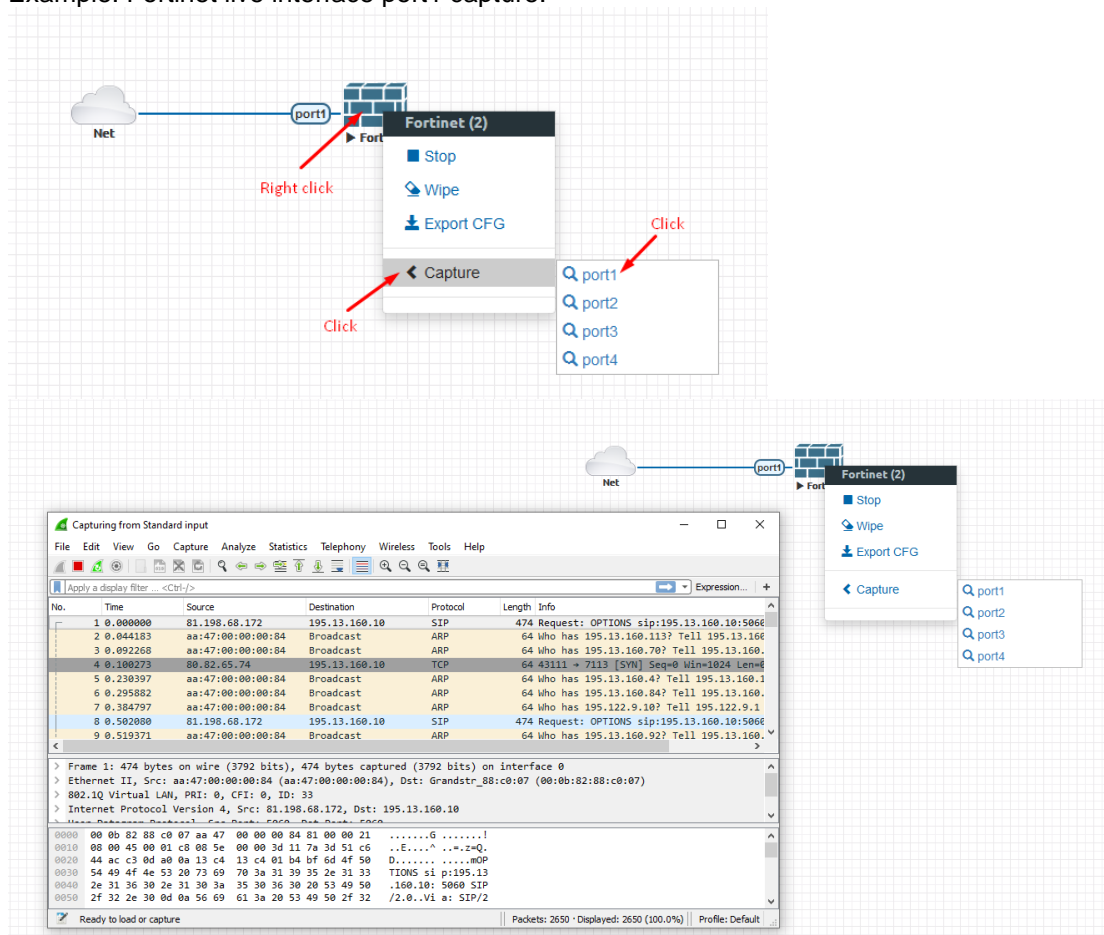

5.1.3 Native Console: VNC


Windows OS: Recommended and tested is UltraVNC but any other compatible one can be used.

Example: UltraVNC as Native VNC client on Windows. To setup Windows native VNC client please follow section [3.7.1](#)

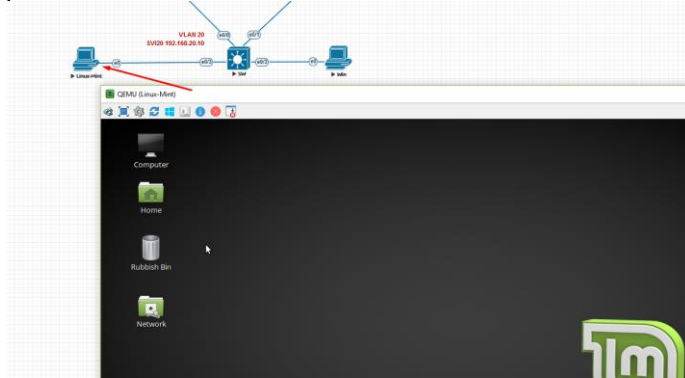

Linux OS: Remote Desktop Viewer for VNC Sessions.

Example: Remote Desktop Viewer for VNC sessions on Linux Mint. To setup Linux native Remote Desktop Viewer please follow section [3.7.2](#)

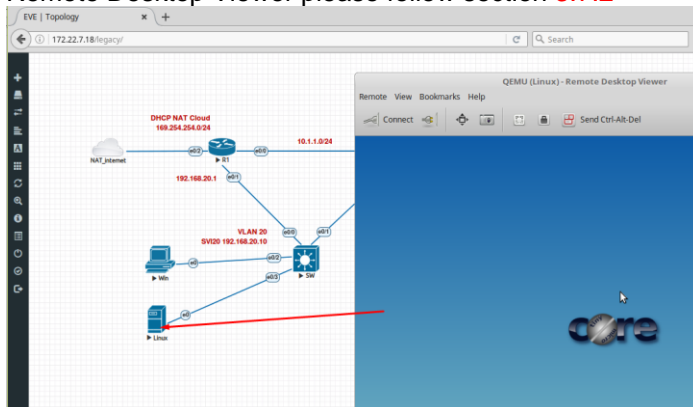


MAC OSX: Preferred VNC program: Chicken VNC

Example: Chicken VNC as Native VNC client on MAC OSX. To setup MAC OSX native RDP Viewer client please follow section [3.7.3](#)


5.1.4 Native Console: RDP

Windows OS: Windows Native RDP.

Example: Windows RDP session to Win10 host in the lab.

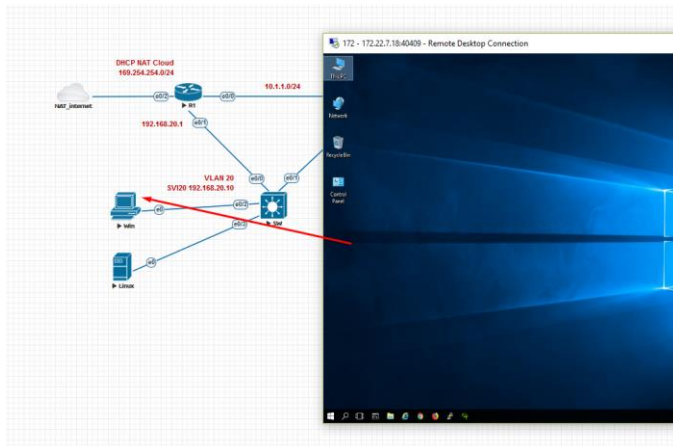

Linux OS: Remote Desktop Viewer as RDP session to lab Win10 host.
Example: RDP session to Win10 host in the lab. To setup Linux native Remote Desktop Viewer please follow section [3.7.2](#)

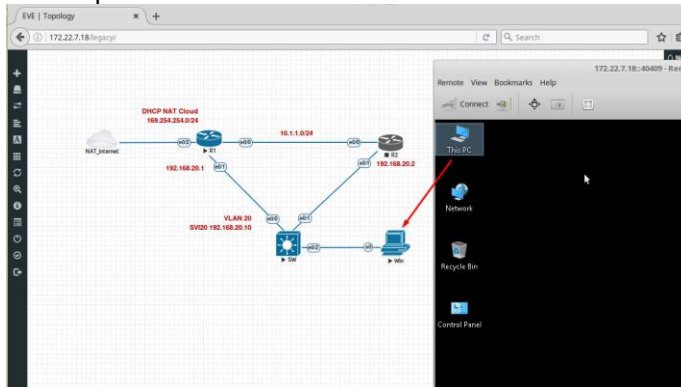

MAC OSX: Remote Desktop Viewer as RDP session to lab Win10 host.
Example: RDP session to Win10 host in the lab.
To setup MAC OSX native RDP Viewer client please follow section [3.7.3](#)


5.2 HTML5 console



The EVE Community HTML5 console provides a clientless solution for managing labs and node sessions. Management is achieved directly through the browser by opening new browser window. It is very convenient for Corporate users with restricted Workstation permissions (Locked Telnet, vnc, rdp).


5.2.1 HTML5 Console: Telnet

HTML5 Telnet console opens telnet sessions in the new browser window.

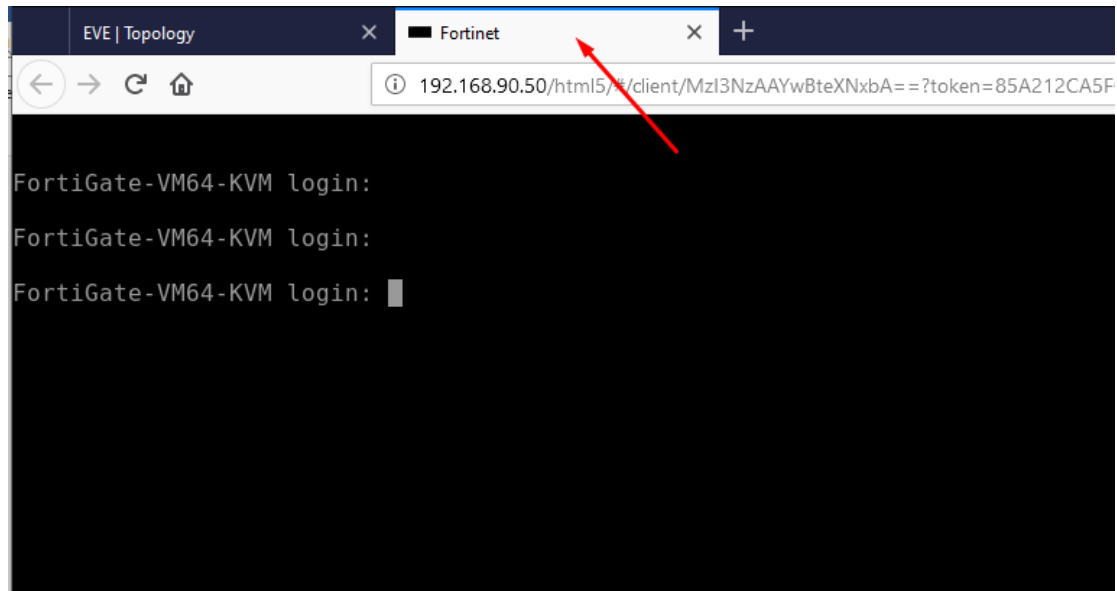

5.2.2 HTML5 Console: VNC

HTML5 VNC opens VNC sessions in the new browser window.

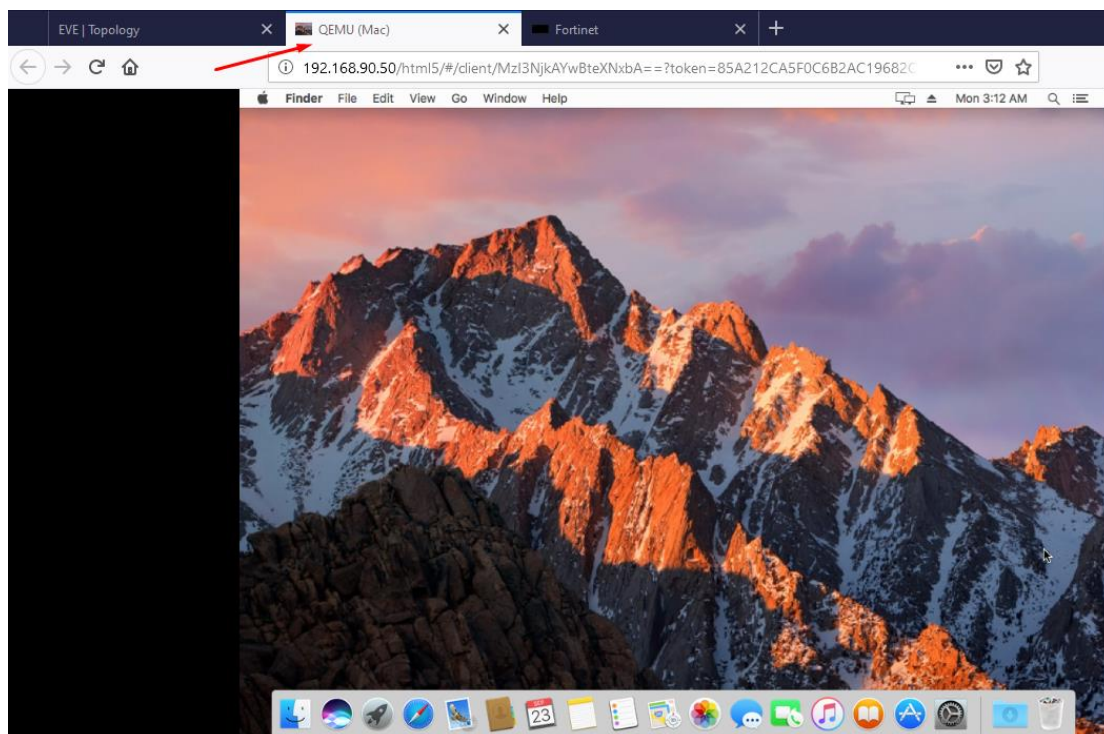

5.2.3 HTML5 Console: RDP for Windows

HTML5 RDP console opens RDP sessions in the new browser window. For Windows 7, Windows Server 2008.

During Windows machine image installation, you can allow RDP sessions to be used for access to Windows host. If your Windows host has enabled RDP session, edit windows node settings and set RDP console. Give time to boot this node and RDP session will opens in new browser tab.

ADD A NEW NODE

Template

Windows

Number of nodes to add

1

Image

win-7-x86-IPCC

Name/prefix

Win

Icon

Desktop.png

UUID

CPU Limit

☐

CPU

1

RAM (MB)

4096

Ethernets

1

QEMU Version

tpi(2.0.2)

QEMU Arch

tpi(x86_64)

QEMU Nic

tpi(e1000)

QEMU custom options

-machine type=pc-1.0,accel=kvm -cpu qemu64,+fsgsbase -vga std -usbdevice tabl

Startup configuration

None

Delay (s)

0

Console

rdp

Left


811

Top

183

Save


Cancel

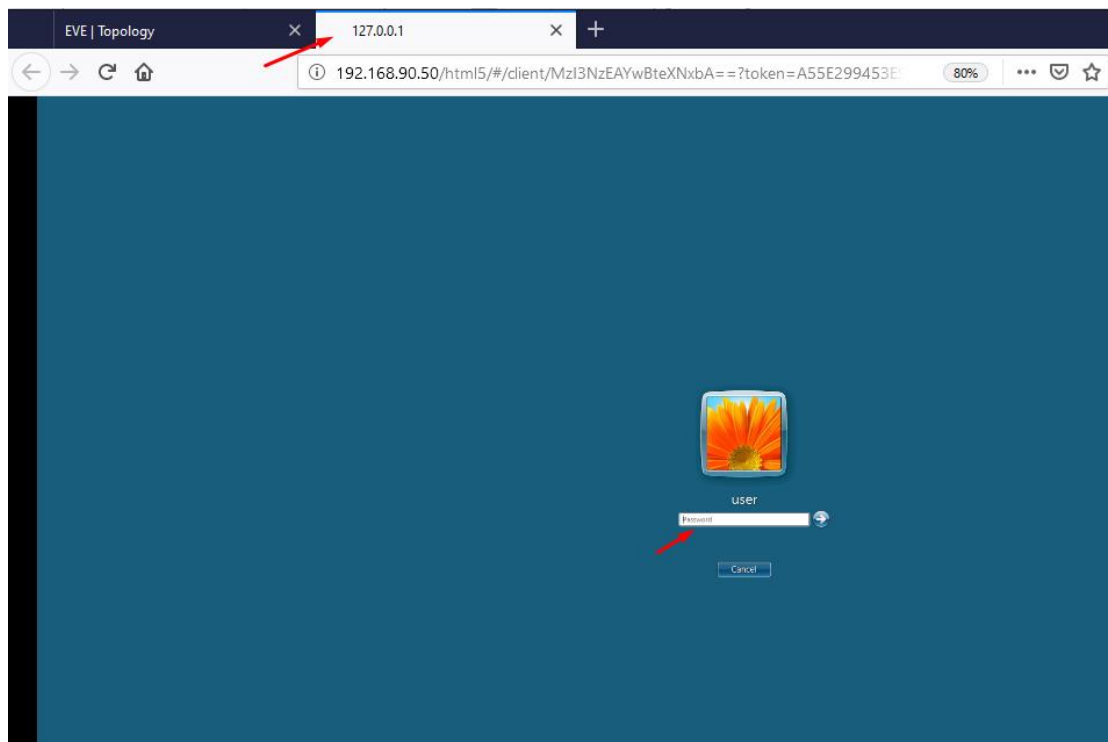

6 EVE WEB GUI Management






6.1 EVE Management Page

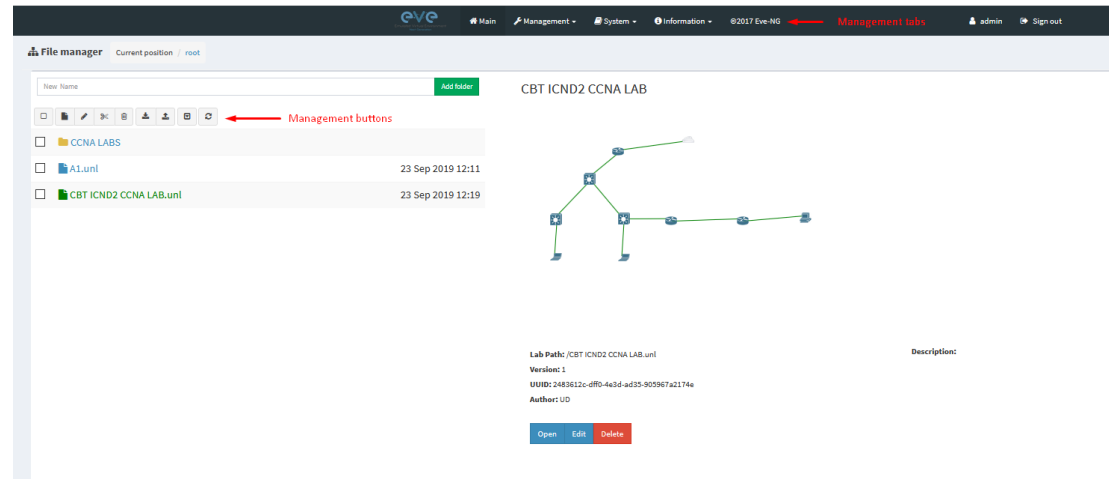



The Main EVE management window




6.1.1 Management buttons











Button	Description
	Select All or Deselect All folders or labs in the EVE tree
	Create/Add new Lab
	Change selected item name. To use this option, please select the folder or lab that you want to rename. You must not rename the Shared folder, the Users folder or any folder inside the Users folder.
	Move selected item(s) to a different location. To use this option, please select the folder(s) or lab(s) that you want to move.
	Delete selected folders or labs. You must not delete the Shared folder, the Users folder or any folder inside the Users folder.

	Import an EVE lab or lab folder from a previous export. Import file must be in .zip format
	Export EVE lab or folder. Select folder(s) and/or labs you wish to export and select this option. The export is saved to your local PC in .zip format and is ready to import to another EVE.
	Toggle the sorting folders and labs between alphabetical and last edit date (ascending/descending cannot be changed currently).
	Refresh current folder content

6.1.2 Management tabs

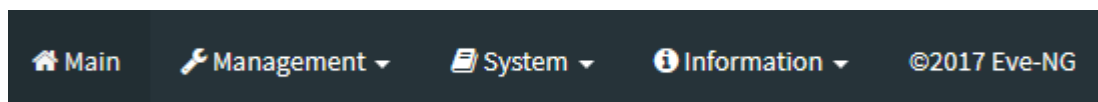

Tab	Description
	Returns back to the EVE Home Management screen.
 	Management dropdown, opening the management submenu. Management submenu, refer to sections: 6.3
   	System dropdown. System submenu, refer to section 6.4
	Information dropdown

<ul style="list-style-type: none"> About Forum YouTube Channel Help on EVE-NG LiveChat 	Information submenu, for details see section 6.5
--	--

6.2 Folders and Lab files management

This section will explain how to manage folders and labs on the EVE management page.

6.2.1 Folders Management


6.2.1.1 Create folder

Type the new folder name and click “Add Folder”

6.2.1.2 Delete folder


Select the folder you wish to delete and press Delete.

⚠ NOTE: All folder content will be deleted as well.

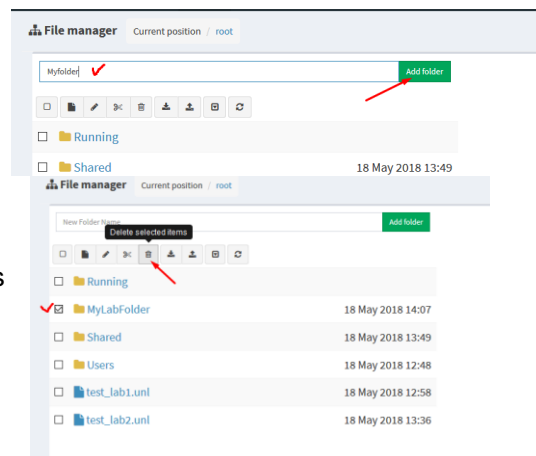


6.2.1.3 Move Folder

Select the folder you wish to move and press the Move to button.

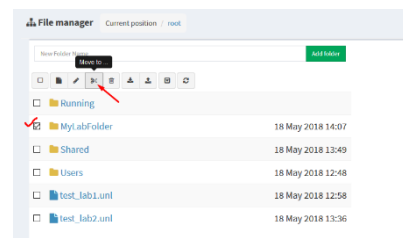


Type and select the target destination for your folder and confirm by clicking on Move.

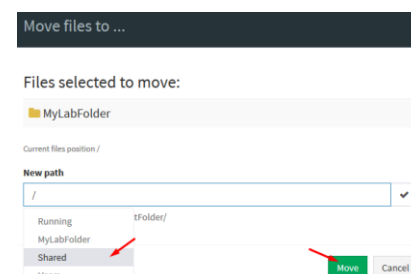


6.2.1.4 Export Folder

Select the folder(s) you wish to export from your EVE and press Export.

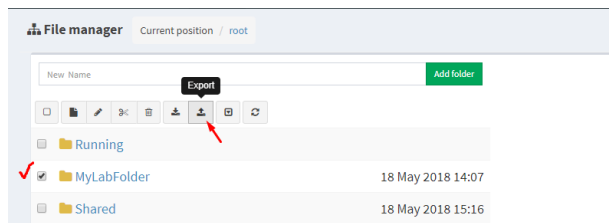

Save the exported file as .zip to your local PC. The exported zip file is ready to import to another EVE instance.

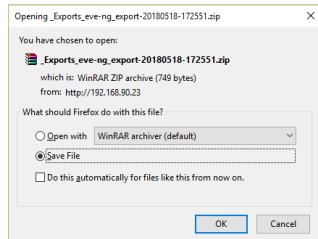


If your browser is set to save downloaded files to a default directory, your exported file will be saved in the browsers default downloads directory.


6.2.1.5 Import Folder

⚠ IMPORTANT: Importable file **MUST** be in .zip format, do **NOT** unzip the file.


Step 1: Press the Import button.

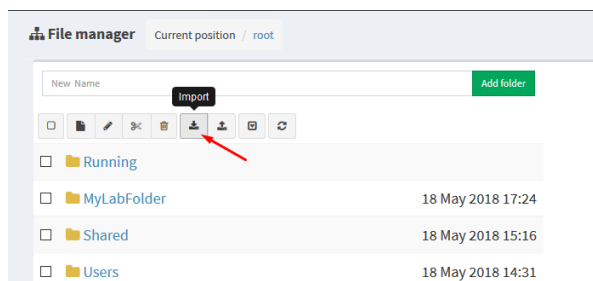


Step 2: Choose the zipped file that contains EVE folders with labs.

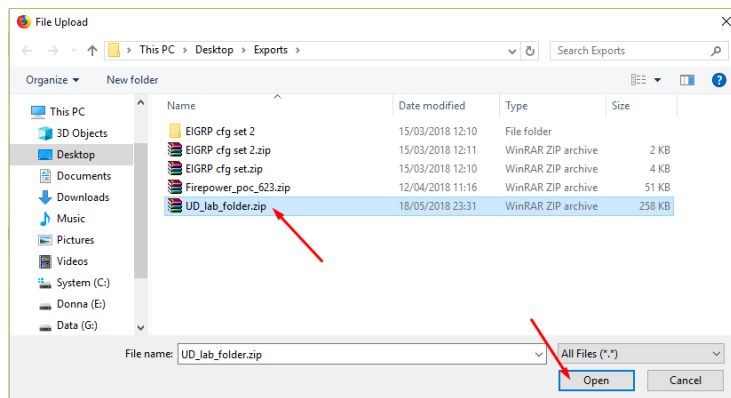

Step 3: Press the Upload Button

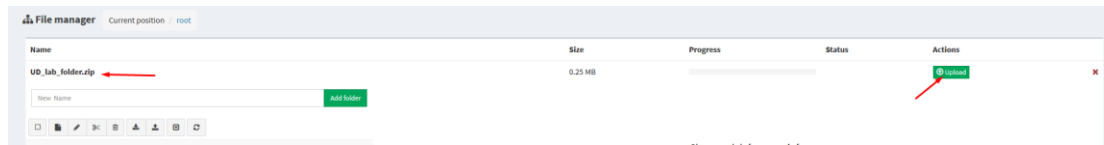


Step 4: After you made sure your folder is imported and has all its content (labs), you can close the upload session.

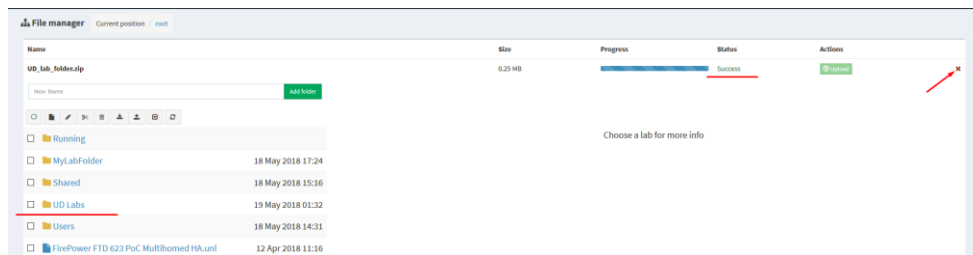


6.2.2 Lab files Management

You can manage created labs from the main EVE file manager window

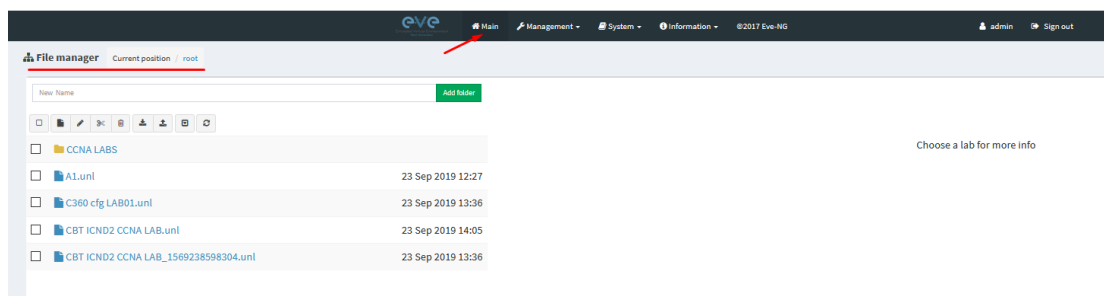


6.2.2.1 Create Lab

Click on the New Lab button and refer to section [8.1](#)

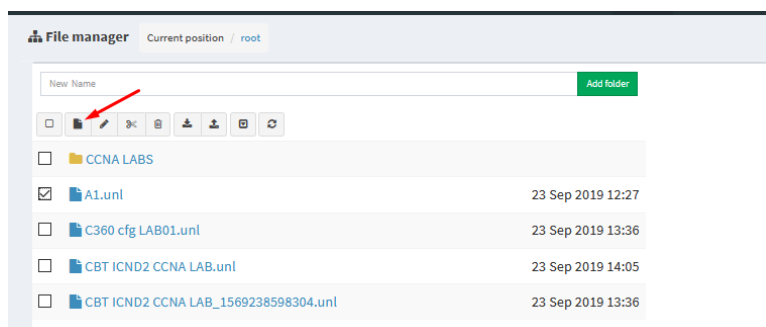

6.2.2.2 Delete Lab

Select the lab or labs you wish to delete and then press the Delete button

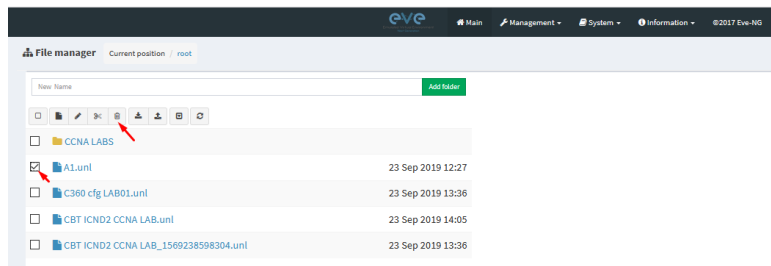


6.2.2.3 Clone Lab


The cloning feature provides a very convenient way to duplicate original labs to share with others or base another lab on it.

Cloned labs will copy exported configs (on supported nodes) but will not copy saved states/configurations in Qemu nodes like Windows hosts, Cisco ISE, or other Qemu nodes that are not supported by the export config feature. Please refer to section [10.3](#) for more information on configuration export for labs.


Step 1: Select the lab you wish to clone and move the mouse pointer (blue) to that lab, an extra option will appear. Click on Clone.

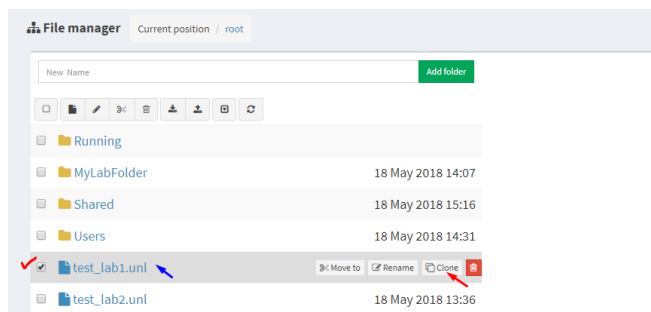

Step 2: Your lab will be cloned with all your exported configurations or configuration sets with a new name.



Step 3: The lab has been cloned lab and can be renamed to your liking. Move the mouse pointer to the cloned lab and choose Rename.



Step 4: Rename it, and click OK to confirm




6.2.2.4 Move Lab

Step 1: Select the lab you wish to Move and move the mouse pointer (blue) to that lab, an extra option will appear. Choose Move to.




Step 2: Type the path to the new destination and confirm by clicking Move

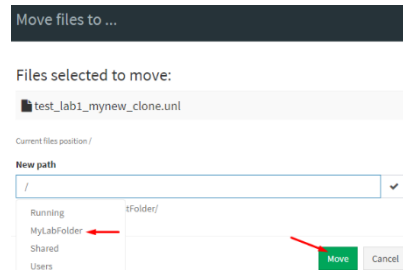


6.2.2.5 Export Lab

Select the Lab(s) you wish to export from your EVE Server and press Export.

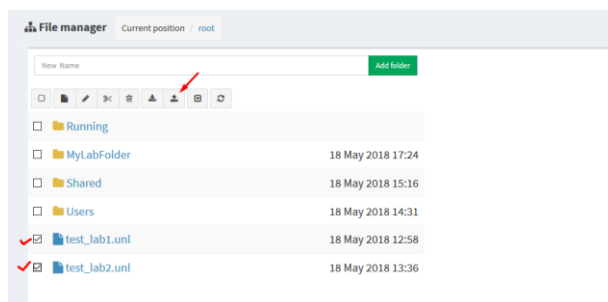

Save exported file as .zip to your local PC. The exported zip file is ready to import into another EVE.

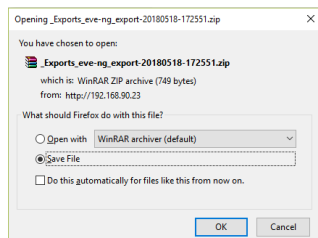


If your browser is set to save downloaded files to default directory, your exported file will be saved in the browsers default downloads directory.


6.2.2.6 Import Labs

⚠ IMPORTANT: Importable file **MUST** be in .zip format, do **NOT** unzip the file.


Step 1: Press the Import button.

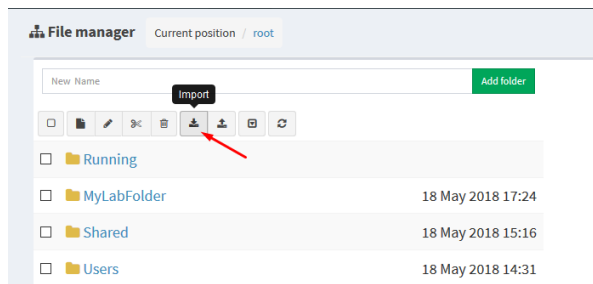


Step 2: Choose the zipped file which contains the EVE labs.

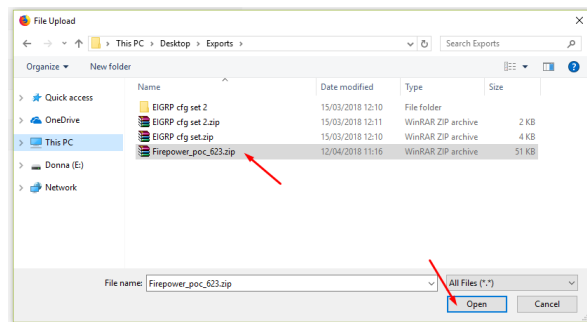

Step 3: Press the Upload Button

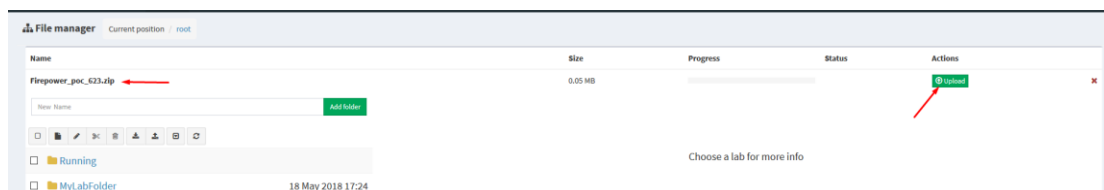


Step 4: After you made sure your lab is imported, you can close the upload session.

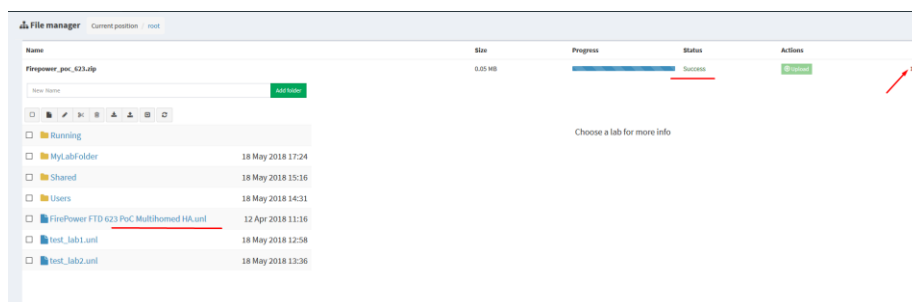

6.3 EVE Management Dropdown Menu


6.3.1 EVE User management

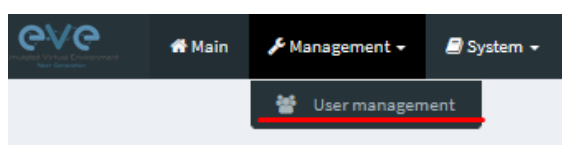

The User Management page, under the Management dropdown, will allow Admin accounts to manage other user accounts.

6.3.1.1 Creating a new EVE User

Step 1: Open the User management submenu. Management>User management and click Add user

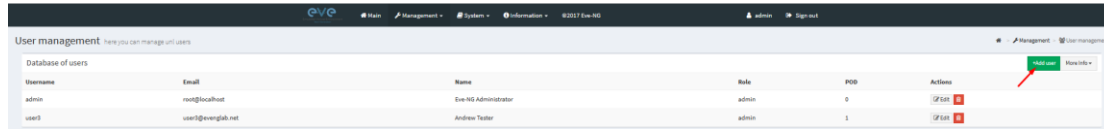

Step 2: The Add New User management window will pop up. Fill in the main information about your EVE user

Add New User

User Name*

Use only [A-Za-z0-9_-]chars

Password*

Password Confirmation*

Email

Please enter an valid email

Name

Role Administrator

POD*

* - Required Fields

[Add](#) [Cancel](#)


Step 3: The POD number is a value assigned to user accounts automatically. POD numbers are like user profiles inside of EVE and are a unique value for every user Think of PODs like a virtual rack of equipment for each user. Admins can assign a preferred number between 1-128. Please keep POD numbers unique between users!

Step 4: Press ADD



6.3.1.2 Edit EVE User

Step 1: Open the User management submenu. Management -> User management and choose which user you want to edit.

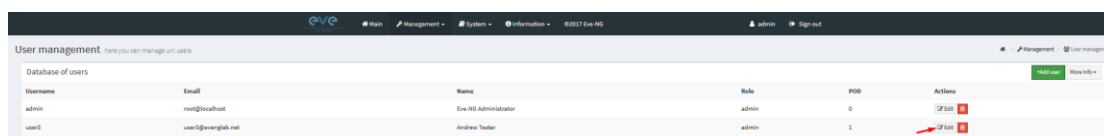

Step 2: The Edit user management window will pop up. Now you can edit necessary user information, roles, or access time. Confirm settings by pressing Edit at the bottom of the window.

Edit User

User Name*

user3

Password*

.....

Password Confirmation*

.....

Email

user3@evenglab.net

Please enter a valid email

Name

Andrew Tester

Use only [A-Za-z0-9_-] chars

Role

Administrator

POD*

1

* - Required Fields

Edit

Cancel

6.3.1.3 User monitoring


There is a dropdown menu next to “Add User” called “More Info” that can provide additional information about your users. Click the checkbox next to the relevant information that you would like displayed. Additional columns will be added for each checkbox that is chosen.

The screenshot shows the 'User management' interface. At the top, there's a header with navigation links: Home, Management, System, Information, and a user profile/sign out button. Below the header, there's a sub-header 'User management' with a description 'here you can manage all users'. The main content is a table titled 'Database of users' with columns: Username, Email, Name, Role, Last session time, Last session ip, Current folder, Current tab, and POD. There are two rows of users: 'admin' and 'user3'. To the right of the table, there's a 'More Info' dropdown menu with checkboxes for 'Last session time', 'Last session ip', 'Current folder', and 'Current tab'. The 'Last session time' and 'Last session ip' checkboxes are checked.

Username	Email	Name	Role	Last session time	Last session ip	Current folder	Current tab	POD
admin	root@localhost	Eve-NG Administrator	admin	23 Sep 2023 12:40:48	10.6.6.20	/	N/A	0
user3	user3@evenglab.net	Andrew Tester	admin	N/A	N/A	N/A	N/A	1


6.4 EVE System Dropdown menu


The EVE System dropdown contains the system utilization status, log files, and an option to stop all running nodes on the server.

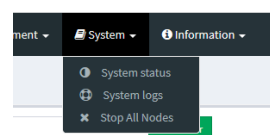

6.4.1 System status

The System Status page, under the System Dropdown, will show EVE server resource utilization, the number of running nodes per template, current running versions of EVE and Qemu, and the current status of the UKSM and CPU Limit options.



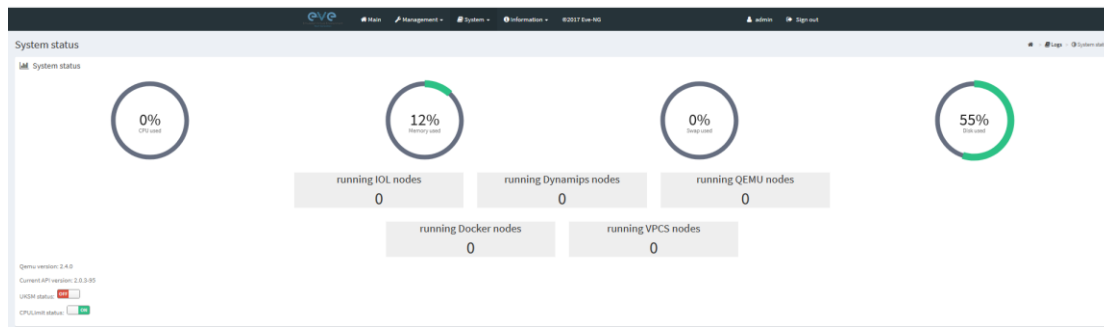

UKSM – “Ultra KSM (kernel same-page merging) is a Linux kernel feature that allows the KVM hypervisor to share identical memory pages among different process or virtual machines on the same server.” It can be disabled globally for EVE on this page. It is recommended to keep UKSM **enabled**.

Template
Cisco vIOS

Number of nodes to add
1

Image
vios-adventerprise9-m-15.6.2T

Name/prefix
vIOS

Icon
Router.png

UUID

CPU Limit ☐ ☒

CPU
1

RAM (MB)
1024

Ethernets
4

CPU Limit – CPU limit is used to limit CPU overloads during the nodes run time. It acts like a smart CPU usage option. If a running node reaches 80% CPU utilization, the CPU Limit feature throttles CPU use for this node to 50% until process usage drops under 30% for a period of 1 minute.

It is recommended to keep the Global CPU Limit option enabled.


CPU Limit can be turned for individual nodes in a lab. EVE node templates are set, by default, with the recommended CPU limit settings. An Unchecked CPU Limit option means that this node will boot without CPU

limit.

Reference:


<https://searchservirtualization.techtarget.com/definition/KSM-kernel-samepage-merging>

6.4.2 System logs

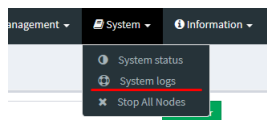


The System logs page, under the System Dropdown, will display EVE server log information

In the menu you can select a specific log file for inspection.

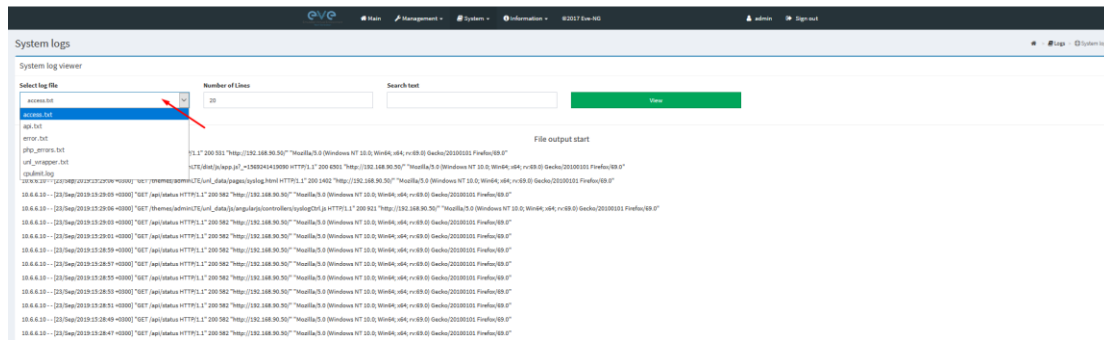


6.4.3 Stop All Nodes

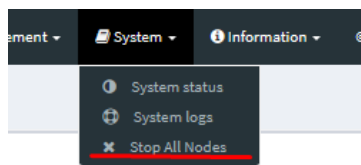

The Stop All Nodes option, under the System Dropdown, is an option that stops all running nodes on the EVE server. This option is accessible only by Admin users.

6.5 EVE Information Dropdown menu

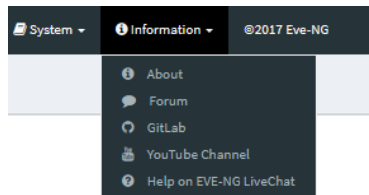


The Eve Information Dropdown contains links to the EVE Website, EVE forum, EVE YouTube channel, and the web-based EVE Live Help chat.

To join the EVE Forum, in order to make posts or download materials, a forum user account must be created.

To join the EVE Live Chat for support, please use your Google account for access, or create a new user account for this chat. Please note the forum and live chat use separate user accounts.


6.6 Other Tab line info

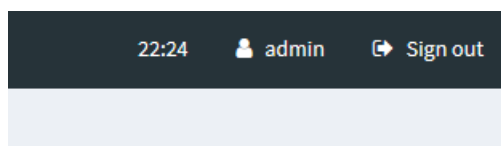

Other items on the top menu are: Real-time clock, a shortcut to edit the currently logged in user, and a sign-out button.


6.7 Lab preview and global settings

Once you click on a lab in the folder tree, a main window on the right side will display schematic content of the lab as well as lab management options like open, edit, and delete.

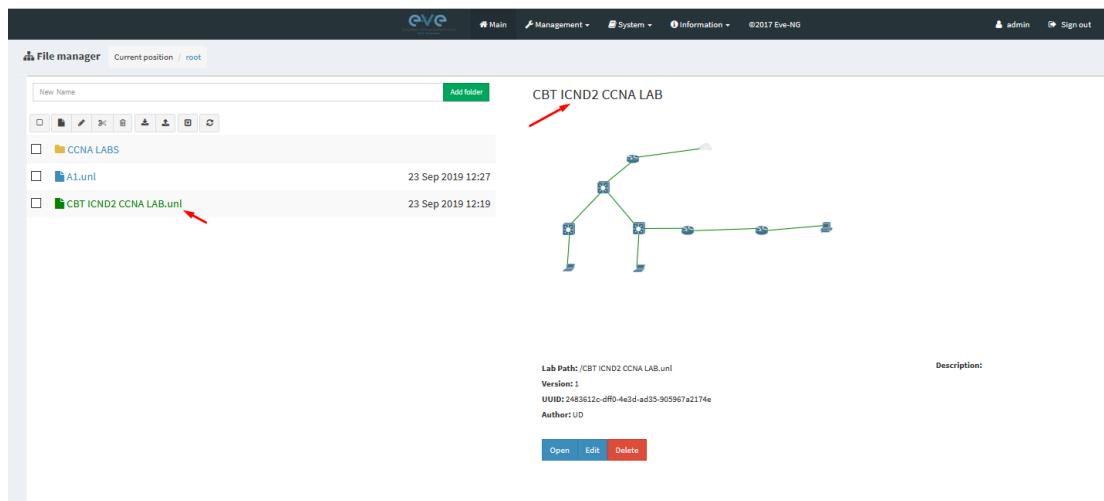




6.7.1 Lab preview window

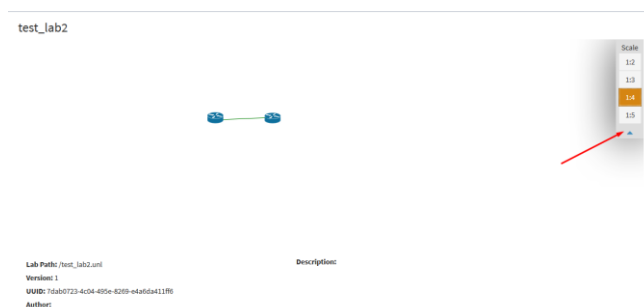The lab preview window displays the schematic position of nodes and their connectivity. The Scale option allows you change the lab preview size.



6.7.2 Lab preview buttons

In the lab preview, these buttons allow you to manage the selected lab.

Button	Description
	Opens the Lab to the Topology Canvas
	Opens the Labs Global Settings. Refer to section 6.7.4 for more info.
	Deletes the lab

6.7.3 Lab preview information

Description, version, UUID etc.

Lab Path: /test_lab1.unl

Version: 12


UUID: 95692558-5acb-4308-ab66-64f9b40bd31f


Author: John Tester

Description:

Here is short description of Lab

6.7.4 Lab Global Settings

Lab Global Settings Page is opened when you click on the  Edit button below the Lab preview window or from the Topology page Side bar:

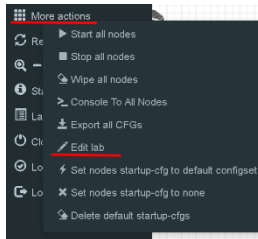

This page allows you to fill out important information about the lab. The red numbers in the picture correlate with the numbers listed below

1. Lab name.
2. Version: Version numbers allow a lab author to assign a value to a unique state of a lab. Increase the number to correspond to new developments in the lab. If left unfilled, EVE will assign a value of 1 automatically.
3. Author: You can add a lab author name in this field
4. Config Script Timeout: It is the value in seconds used for the “Configuration Export” and “Boot from exported configs” operations. Refer to section [10.3](#) for more information.
5. Description: In the Description field you can write a short description of the lab.
6. Tasks: In the Tasks field you can write the task for your lab.



The Lab details window can be opened from the Topology Canvas page sidebar during labbing, to read the Tasks for the lab.

LAB DETAILS

TEST_LAB1


ID: 95692558-5acb-4308-ab66-64f9b40bd31f

Here is short description of Lab

Here are tasks for your lab. Task 1, Please configure Routers with IP addressing Task 2, Configure IGP, EIGRP routing on all nodes Task 3, Configure windows Host to receive DHCP IP address


7 EVE WEB Topology page

Once you open a lab, the topology page for that lab will open.

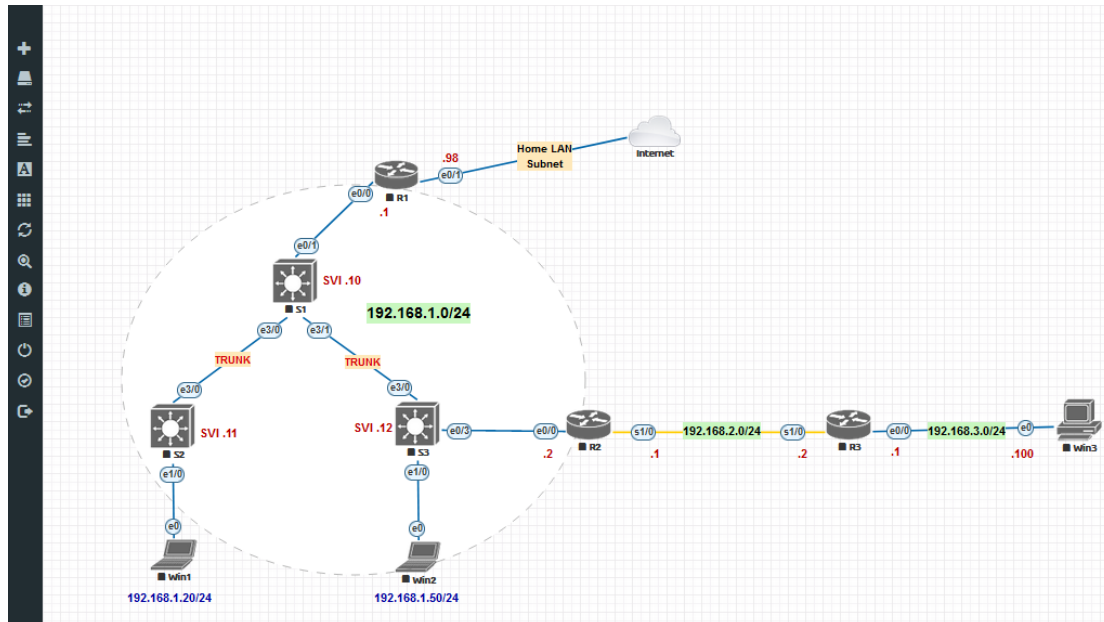


7.1 Side bar functions

Move your mouse pointer over to the left on top of the minimized sidebar to expand the interactive sidebar as shown in below screenshot

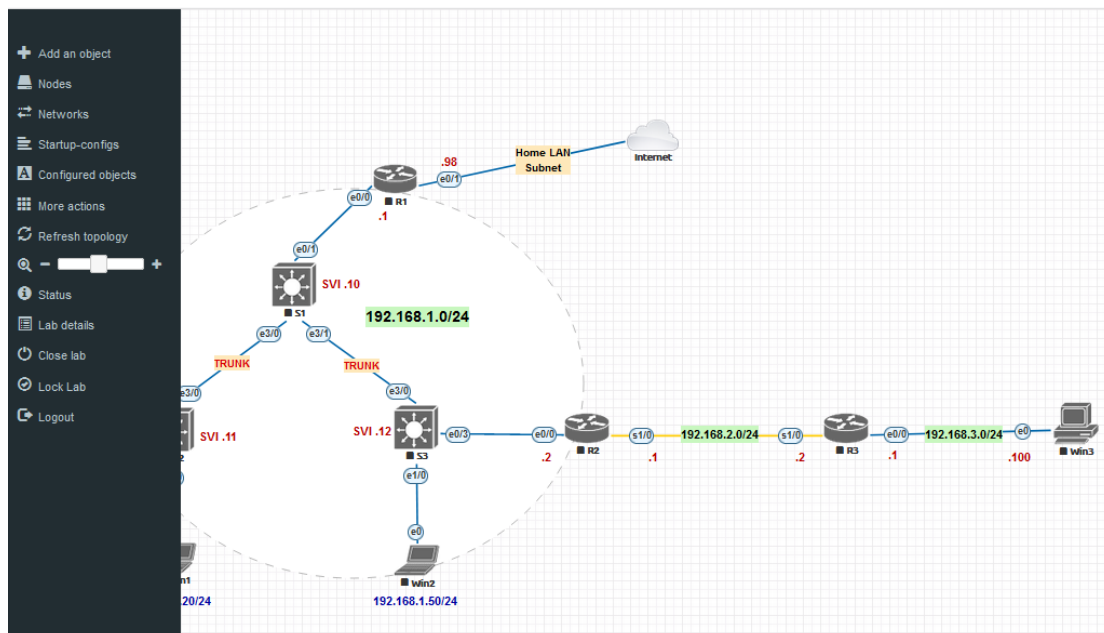


7.1.1 Add an object

The “Add an object” menu can be accessed in two different ways, from the sidebar and by right-clicking on the Topology Page

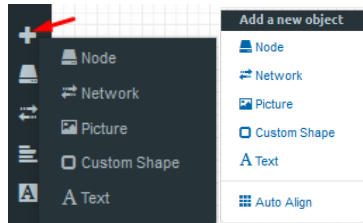


7.1.1.1 Node object

The Node object opens the “Add a new node” window. Only nodes that appear blue in the dropdown menu can be added. A grey image name signifies that you have not yet properly uploaded an image to the proper folder. A blue image name means that at least one image exists in the proper folder for this template.

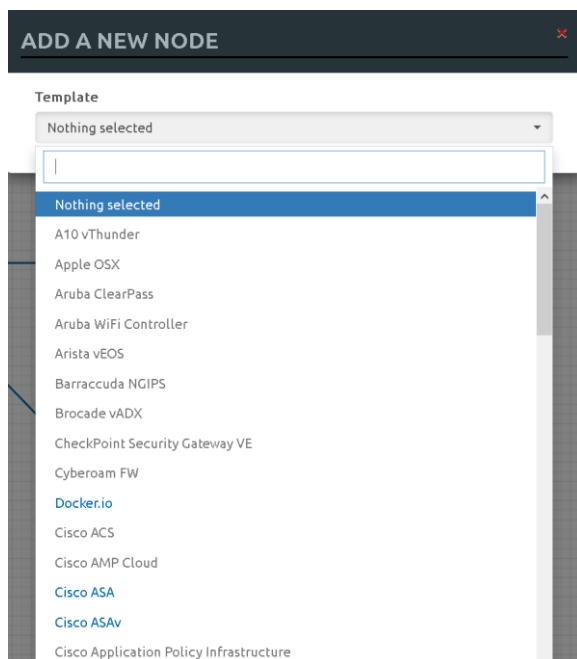

7.1.1.2 Network object

The Network object opens the “Add a new network” window. This function is used to add any kind of network (Cloud, Bridge). For details on these, please refer to section **9**

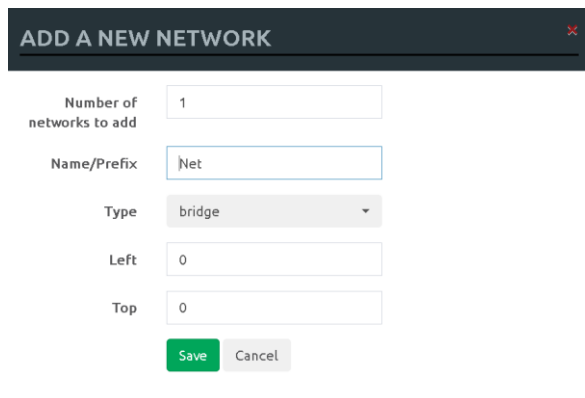

ADD A NEW NETWORK

Number of networks to add:

Name/Prefix:


Type:

Left:

Top:

7.1.1.3 Picture object

The picture object opens the “Add Picture” window and allows you to upload custom topologies in jpg or png format. After uploading, you can edit these pictures and map selected areas to nodes from the topology to use your own designs as a lab topology from which you can directly connect to the nodes. For details, refer to section [10.2](#)

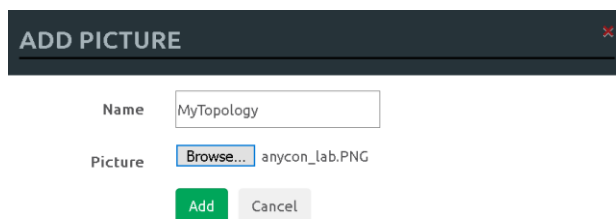


ADD PICTURE

Name:

Picture: anycon_lab.PNG

7.1.1.4 Custom shape object

The Custom shape object allows you to add shape elements onto the topology; these currently include squares, round squares and circles. For details, refer to section [10.1](#)

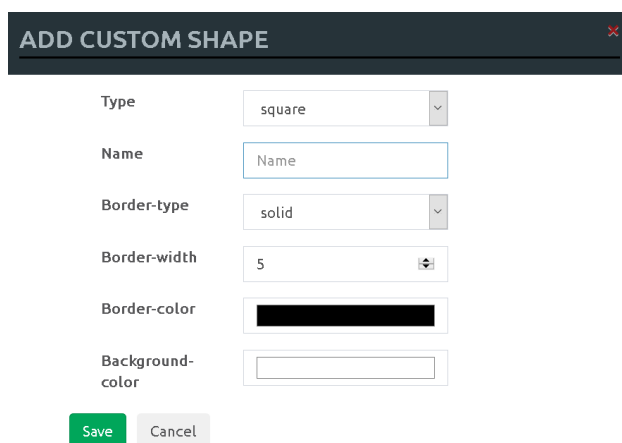

ADD CUSTOM SHAPE

Type:

Name:

Border-type:


Border-width:

Border-color:

Background-color:

7.1.1.5 Text object

The Text object allows you to add Text elements onto the topology. For details, refer to section [10.1.3](#)

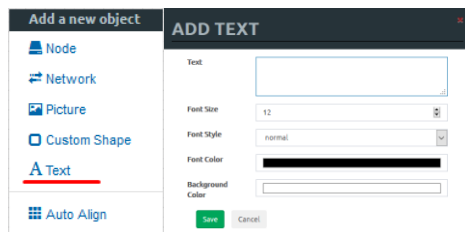

7.1.2 Nodes



The Nodes object in the sidebar opens the “Configured Nodes” window.

CONFIGURED NODES													
ID	NAME	TEMPLATE	BOOT IMAGE	CPU	CPU LIMIT	IDLE PC	NVRAM (KB)	RAM (MB)	ETH	SER	CONSOLE	ICON	STARTUP-CONFIG ACTIONS
1	Win	win	win-10-x64-VL19	1	<input type="checkbox"/>	n/a	n/a	8192	1	n/a	rdp-tls	Desktop.png	None
2	R2	lol	l866_LinuxL3-AdvEnterpr	n/a	<input type="checkbox"/>	n/a	1024	1024	1	0	telnet	Router.png	None
3	R3	lol	l866_LinuxL3-AdvEnterpr	n/a	<input type="checkbox"/>	n/a	1024	1024	1	0	telnet	Router.png	None
4	R4	lol	l866_LinuxL3-AdvEnterpr	n/a	<input type="checkbox"/>	n/a	1024	1024	1	0	telnet	Router.png	None
5	Decker	decker	eve-estimatorlatest	n/a	<input type="checkbox"/>	n/a	n/a	256	1	n/a	rdp	Network Analyzer.png	Default
6	Win	win	win-7-x86-IPCC	1	<input type="checkbox"/>	n/a	n/a	4096	1	n/a	rdp-tls	Desktop.png	None

In this window, you can make changes for nodes that are on the lab topology. More options can be found in the detailed node specific menu, for details refer to section 8.1.2.

NOTE: Running nodes are highlighted in Blue, their settings cannot be changed. You can only change settings of nodes that are not currently running.

You can change the following values:

- Node Name
- Boot image
- Number of CPUs for the node
- Enable or disable CPU Limit (Refer to section 6.4.1)
- IDLE PC for Dynamips node
- NVRAM in Kbyte
- RAM in Mbyte
- Ethernet quantity. **NOTE:** The Node must be disconnected from any other nodes to make this change. You cannot change the interface quantity if the node is connected to any other node.
- Serial interface quantity, IOL nodes only. You cannot change Serial interface quantity if the node is connected to any other node.
- Type of Console
- Node Icon that appears on the Topology
- Startup configuration to boot from


Actions Buttons (Stopped node):



- Start node

- Stop node
- Wipe node
- Export the nodes config
- Networks
- Edit node
- Delete Node

Actions Buttons (Running node):

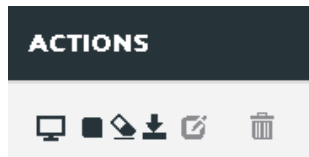


- Console to the node
- Stop node
- Wipe node
- Export the nodes config
- Edit node
- Delete Node

7.1.3 Networks



The Networks object in the sidebar will open the “Configured Networks” window.

The “Configured Networks” window will only show networks that were specifically added to the topology; it will not show node interconnections. The example below is showing information for networks on the Topology. For Cloud networks and how to connect EVE labs to a network external to EVE, please refer to [section 9](#)

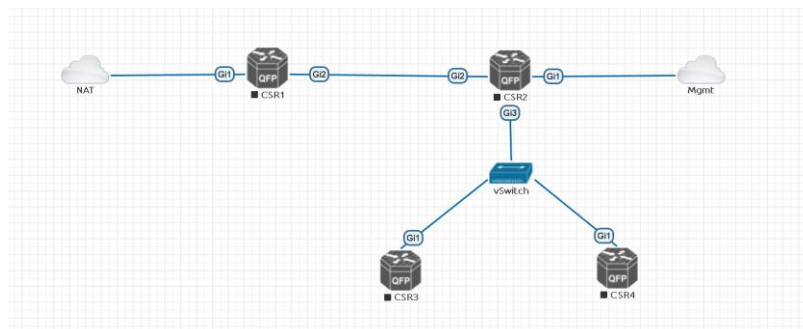


CONFIGURED NETWORKS				
ID	NAME	TYPE	ATTACHED NODES	ACTIONS
1	NAT	nat0	1	
2	Mgmt	pnet0	1	
3	vSwitch	bridge	3	



7.1.7 More actions

The More actions menu in the sidebar has a submenu with the following functions.

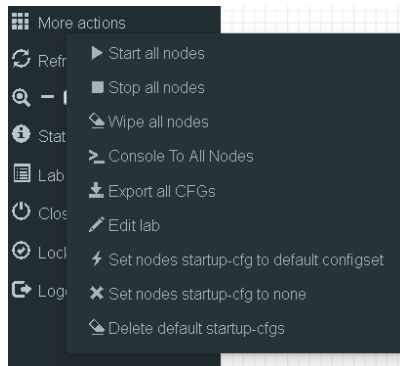

7.1.7.1 Start all nodes

▶ Start all nodes

The “Start all nodes” action will start all nodes on your topology, taking the (configurable) startup delay of each node into consideration.

⚠ IMPORTANT. Starting many nodes at once can seriously spike your CPU utilization. Please make sure that you are not using the “Start all nodes” option for heavy labs or that you have configured a proper delay between the nodes. For heavy nodes and large quantities, it is recommended to start them in smaller groups, wait for them to finish booting and then start another small group of nodes.

7.1.7.2 Stop all nodes

■ Stop all nodes

Stopping all nodes will power off all nodes on your topology.

⚠ NOTE: It is recommended to save your (running) configurations on the nodes in your lab before you stop the lab if you want to continue where you left off the next time. Stopping the nodes will leave the images in a temporary folder and will take up space on your drive until they have been wiped.

7.1.7.3 Wipe all nodes

🧹 Wipe all nodes

The “Wipe all nodes” action will wipe the NVRAM or currently saved image of all your nodes in the current lab.

Example: You have saved the nodes configuration by saving the running configuration to the startup configuration. The Wipe command will delete the saved NVRAM startup configuration and on the next boot it will boot from factory defaults.

The same applies to images without configurations, e.g. a linux node. If you make modifications to the system and afterwards wipe this node, the next time it will boot from the original base image again as the modified image was deleted.

The “Wipe node” action is commonly used with initial startup configuration modifications. The Wipe node action does not delete configured startup configurations or sets. Please refer to section [10.3](#)

7.1.7.4 Console to All Nodes

 Console To All Nodes

“Console to all nodes” will open a console to all of your running nodes in the current lab. This includes all different kinds of configured console types for lab nodes like VNC, Telnet and RDP.

7.1.7.5 Export all CFGs

 Export all CFGs

The “Export all configurations” action will export current configs to the EVE startup-configs.

Export configurations are supported for:


Cisco Dynamips all nodes Cisco IOL (IOS on Linux) Cisco ASA Cisco ASAv Cisco CSR1000v Cisco Nexus 9K Cisco Nexus Titanium Cisco vIOS L3 Cisco vIOS L2 Cisco XRv Cisco XRv9K	Juniper VRR Juniper VMX Juniper vMX-NG Juniper vQFX Juniper vSRX Juniper vSRX-NG Mikrotik PfSense FW Timos Alcatel vEOS Arista
---	---

For a full explanation of exporting configurations, please refer to section [10.3](#)

7.1.7.6 Edit lab

 Edit lab

Opens the Edit lab window. Refer to section: [6.7.4](#)

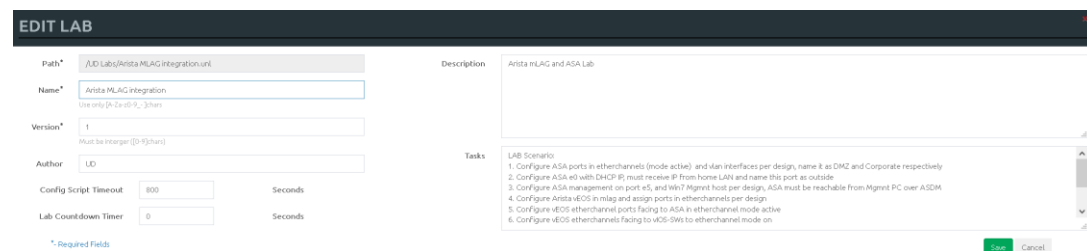

7.1.7.7 Set node's startup-cfg to default configset

 Set nodes startup-cfg to default configset

Sets nodes to the default startup-config. NOTE: If you have nothing saved in the default config set for any node, that node will boot from factory default instead. This is commonly used with the wipe nodes function so the node will boot from the configured startup-config on next boot and not from the startup-config in its NVRAM in case the node was started before already.

Please refer to section [10.3](#)

7.1.7.8 Set node's startup-cfg to none

✖ Set nodes startup-cfg to none

Setting all lab nodes to boot from factory default. Used commonly with the wipe nodes function. The example below shows the steps to set a lab to boot from factory default.

Step 1: Wipe all nodes

Step 2: Set all nodes to startup-cfg none

Please refer to section [10.3](#)

7.1.7.9 Delete default startup-cfgs

🗑 Delete default startup-cfgs

⚠ **WARNING:** this action will delete all configurations saved to your saved default config set. Please make sure that is what you want to do before you execute this.

7.1.8 Refresh Topology


🔄 Refresh topology

Sometimes it is necessary to refresh the topology if many objects are added on the topology.

7.1.9 Lab page zoom/unzoom



This action is used to zoom or unzoom a large topology in EVE.

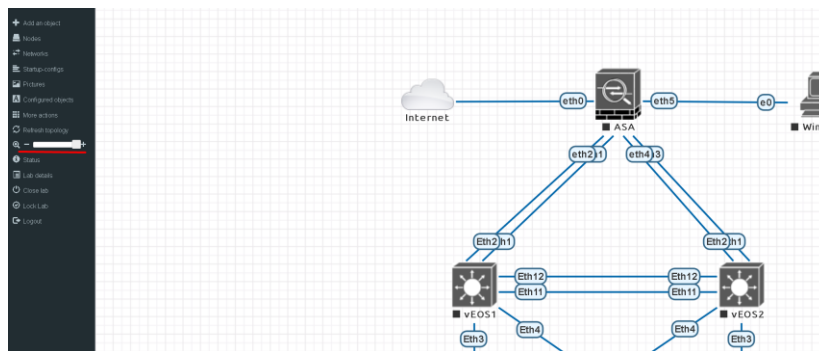


7.1.10 Status


📊 Status

Opens the EVE Status window.


Especially useful while working with labs to monitor your EVE's resource utilization. It shows EVEs CPU, RAM and disk utilization in real time. You can also see the number of running nodes per node type. For details on UKSM and CPU Limit, please refer to section [6.4.1](#)

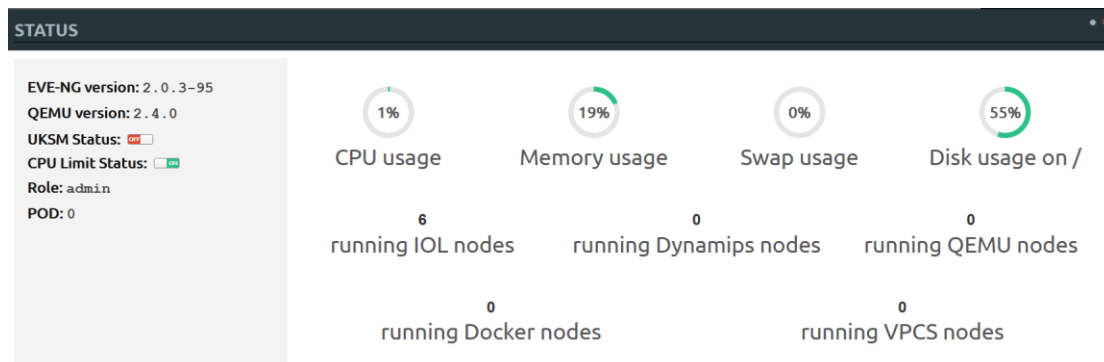

7.1.11 Lab details



Lab details display information about a lab, its UUID, description and lab tasks. To edit the lab description and lab tasks, please refer to section [6.7.4](#) and [7.1.7.6](#)

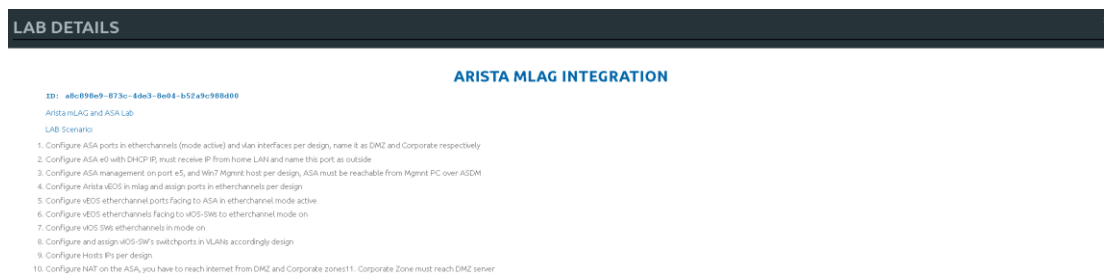

7.1.12 Lock Lab

“Lock Lab” disables some of the functions on the lab topology. If the lab is locked, you cannot move any node or object nor edit any node settings. Basically, the whole lab will be in read-only mode except for the lab settings itself, which you can still edit as Administrator from the main menu.

<p>Lock Lab</p> <p>Lab is unlocked and all operations are working</p>	<p>Unlock Lab</p> <p>Lab is locked and all operations are restricted</p>
--	---

To unlock a Lab, simply press on the red “Unlock Lab” button with an Administrator account.

7.1.13 Dark mode or Light mode

<p>Dark Mode</p> <p>Sets your lab background to the dark mode</p>	<p>Light Mode</p> <p>Sets your lab background to light mode</p>
--	--

7.1.14 Close lab



Closes the lab topology. The lab can be closed while the nodes in the lab nodes are stopped.

7.1.15 Logout




Log out from the EVE WEB GUI session.

7.2 EVE Lab topology menus

Right-clicking within the EVE topology can open new menus with various functions and options for managing nodes.

7.2.1 Lab topology menu



Right-clicking on the (free/unused) canvas of the EVE topology opens a new menu. (Add-) Node, Network, Picture, Custom Shape and Text are the same functions referred to in section 7.1.1.

Auto Align. This function will help align objects on the topology. The lab creator does not need to worry about small displacements of objects. Auto Align will align all objects to a virtual grid with a single click and can make neatly arranged labs look even neater.


7.2.2 Connection menu



Right-clicking on the connection between nodes allows you to delete this connection.

7.2.3 Cloud or Bridge network menu

Right-clicking on a Cloud or Bridge network allows you to edit or delete it.

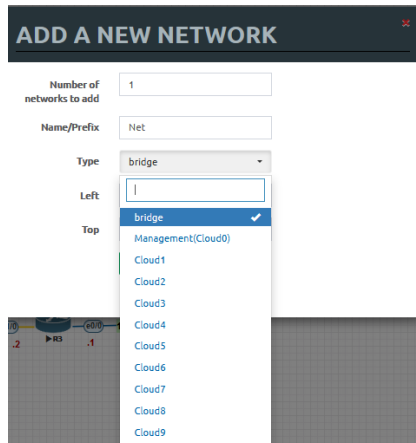


If you have chosen Edit, the Network edit window will open a window where you can change the placement, network type or name/prefix.

For details on how to operate EVE Cloud networks and external connections, please refer to [section 9](#)

7.2.4 Stopped node menu

Right-clicking on a stopped node also opens a menu:

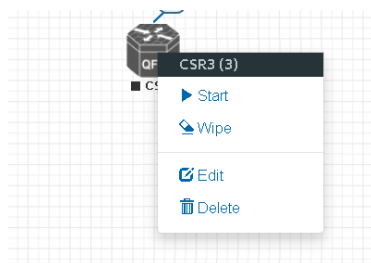

Start node: This will start the selected node in this lab

Wipe node: Wiping a node will erase the NVRAM (running config) or the temporary image snapshot depending on the type of node. This option is used to clean up a node in order to boot it from factory defaults or a custom set of configurations.

Edit node: Opens the Edit node window (picture on the right). For details please refer to [section 8.1.2](#)

Delete node. Deletes the node from the lab. It is recommended to disconnect (delete connections to it) the node before you delete it.

EDIT NODE

Template

Cisco CSR 1000V

ID

3

Image

csr1000v-universalk-9.03.17.04.\$156-1.54

Name/prefix

CSR3

Icon

CSRv1000.png

UUID

67Fea887-b30d-4ad0-b314-628808b38533

CPU Limit

☐

CPU

1

RAM (MB)

3072

Ethernets

4

QEMU Version

tpl(2.12.0)

QEMU Arch

tpl(x86_64)

QEMU Nic

tpl(e1000)

QEMU custom options

-machine type=pc-1.0,accel=kvm -serial mon:stdio -nographic -nodefconfig -nodef

Startup configuration

None

Delay (s)

0

Console

telnet

Left

472


Top

365

Save

Cancel


7.2.5 Running node menu



Right-clicking on a running node also opens a menu:

Wipe node: Wiping a node will erase the NVRAM (running config) or the temporary image snapshot depending on the type of node. This option is used to clean up a node in order to boot it from factory defaults or a custom set of configurations.


Export CFG: This function is used to export the saved running configuration to the EVE startup configuration sets. Reference section [10.3](#)

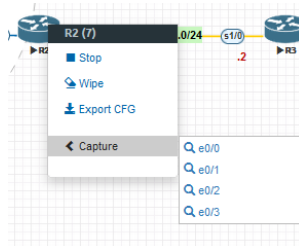


Capture. Wireshark capture. Select the interface which you wish to capture. Reference section [5.1.2](#)

7.2.6 Selected nodes menu and features

It is possible to select many objects or nodes at once in EVE. Using your mouse, you can select an area which will cover your nodes and/or you can click on nodes while holding the CTRL key on your keyboard.

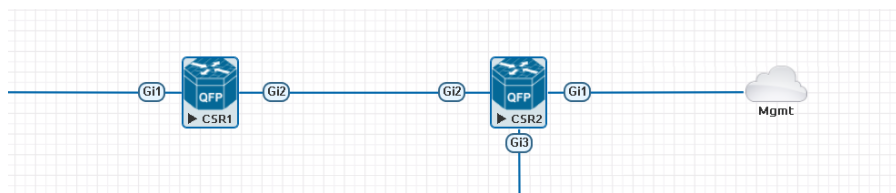

A right-click on any of the selected nodes opens a group menu:

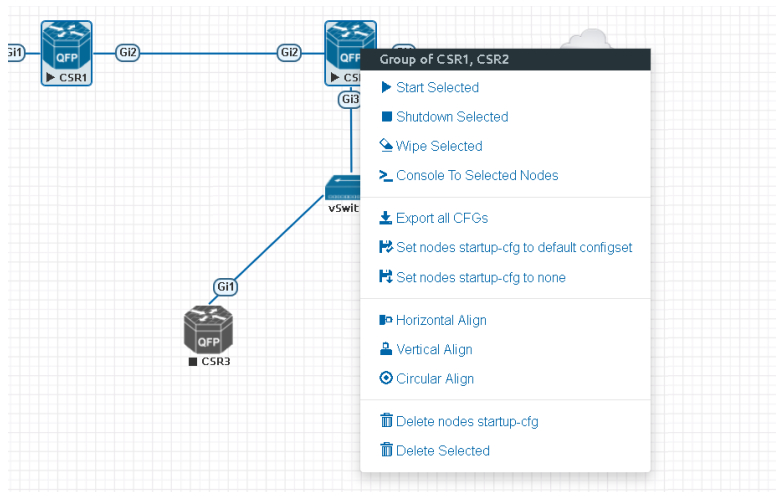

Start Selected: This will start the selected nodes in this lab.

Stop Selected: This will stop the selected nodes in this lab

Wipe Selected: The Wipe Selected nodes action will wipe the NVRAM or currently saved image of the selected nodes in the current lab.

Example: You have saved the nodes configuration by saving the running configuration to the startup configuration. The Wipe command will delete the saved NVRAM startup configuration and on the next boot it will boot from factory defaults.

The same applies to images without configurations, e.g. a linux node. If you make modifications to the system and afterwards wipe this node, the next time it will boot from the original base image again as the modified image was deleted.

The Wipe node action is commonly used with initial startup configuration modifications. The Wipe node action does not delete configured startup configurations or sets. Please refer to section [10.3](#)

Console To Selected Nodes: Console To Selected Nodes will open a console to all selected running nodes in the current lab. This includes all different kinds of configured console types for lab nodes like VNC, Telnet and RDP

Export all CFGs: The Export all configurations action will export current configs of selected nodes to the EVE startup-configs.

For a full explanation of exporting configurations, please refer to section [10.3](#)

Set nodes startup-cfg to default configset: Sets nodes to Default startup config, used commonly with the wipe nodes function. NOTE: If you have nothing saved in the default config set for any node, that node will boot from factory default instead. This is commonly used with the wipe nodes function so the node will boot from the configured startup-config on next boot and not from the startup-config in its NVRAM in case the node was started before already.

Please refer to section [10.3](#)

Set nodes startup-cfg to none. Setting selected lab nodes to boot from factory default. Used commonly with the wipe nodes function. The example below shows the steps to set selected nodes to boot from factory default.

Step 1: Wipe selected nodes

Step 2: Set nodes startup-cfg to none


Please refer to section [10.3](#)

Horizontal Align. Aligns the selected nodes in one horizontal line.

Step 1: Select the nodes you wish to align.

Step 2: Right click on one of the selected nodes and choose Horizontal align, this will align all nodes to the selected node.

Picture before:

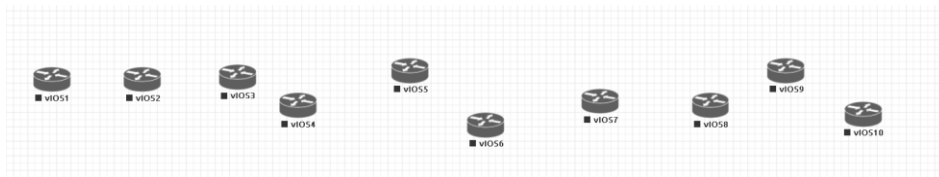

Picture after:




Vertical Align: Aligns the nodes in one vertical line.

Step 1: Select the nodes you wish to align.

Step 2: Right click on one of the selected nodes and choose Vertical align, this will align all nodes to the selected node.

Picture before

Picture after

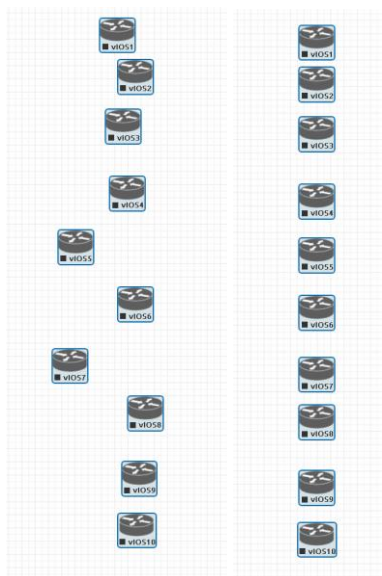

Circular Align: Aligns the nodes in a circle.


Step 1: Select the nodes you wish to align.

Step 2: Right click on one of the selected nodes and choose Circular Align, this will align all nodes in a circle, the midpoint of the circle will be at the coordinates the selected node was at before.

Picture Before



Picture After

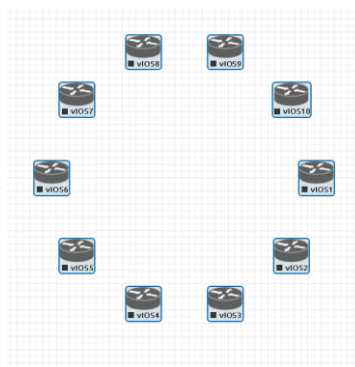


Delete nodes startup-config.

⚠ WARNING, this action will delete the configurations of the selected nodes that are saved to your Default config set. Please make sure that is what you want to do before you execute this.

Delete selected: This will delete the selected nodes from your current lab.


Selected nodes can be moved as a group across the topology.

Example: You can select nodes and objects to better position them on the Topology.

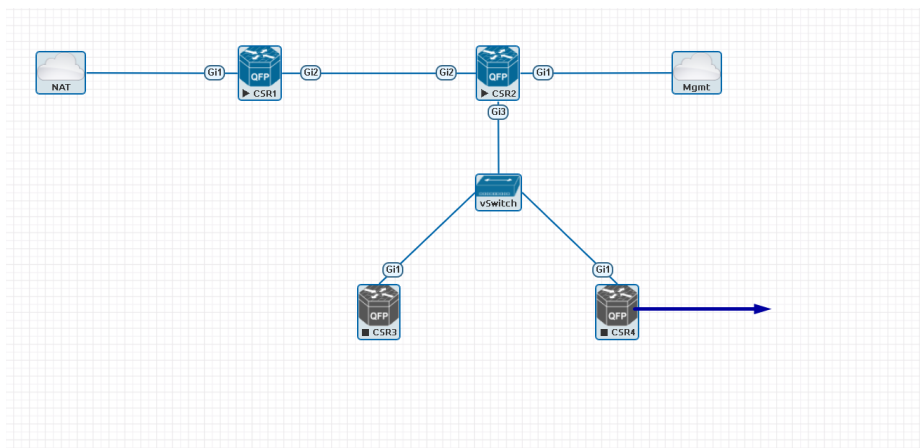


7.3 EVE Lab node states and symbols

7.3.1 Stopped (non-running) nodes



Grey colour and a square symbol below a node means that the node is stopped and not running. Once you will start it, the node will change to one of the running states below.



A grey node with an exclamation mark inside a triangle below the node means that there was a problem during the boot process, this could be a corrupted boot image, insufficient resources or problems with the initial configuration. A node in this state cannot be started again.

Workaround: Right-click on the node and wipe it, the symbol will then change to a grey colour with a square symbol below it. Then edit the node and make sure you have configured sufficient resources and the correct settings for this node, if it has startup-configs you can check them as well. Afterwards start the node again.

7.3.2 Running nodes



The blue colour and black Play triangle symbol means that the node is started and running, the node is in a working/functional state.



A running node with a clock symbol below the node means that the node is waiting to finish loading from the set exported/startup configuration. Once the configuration has been successfully applied, the node symbol will change to a Play triangle symbol. If the node has finished booting but the clock symbol does not change to the Play triangle symbol, the problem could be in the uploaded startup configuration. For how to use exported configurations and boot nodes from them, please refer to section **10.1**




A running node with a turning red gear symbol means that the node is either in the process of hibernating the node or it has sent the shutdown signal to the node and is waiting for it to turn off. Once this process has successfully finished, the symbol will turn into a grey node with a black square symbol below it (stopped state).

NOTE: If the node does not support a system shutdown or does not recognize the shutdown signal (example: Cisco router), after clicking on Shutdown, the node can stay with a turning red gear symbol below it indefinitely.

Workaround: Use Stop or Stop/PowerOff to stop the node.

Example nodes where Stop/Shutdown is supported: Microsoft Windows and most Linux nodes as well as a lot of appliances based on linux.


7.3.3 Node connector symbol

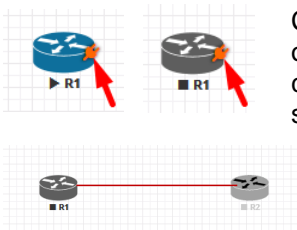

Connector symbol: If you move your mouse pointer on top of a running or stopped node, an orange connector symbol appears. It is used to connect nodes on the topology in a drag and drop style. Drag the symbol from one node and release the mouse pointer on the second node. A new window will appear where you can select the interfaces the link should connect to.

7.4 Other

7.4.1 Notifications area

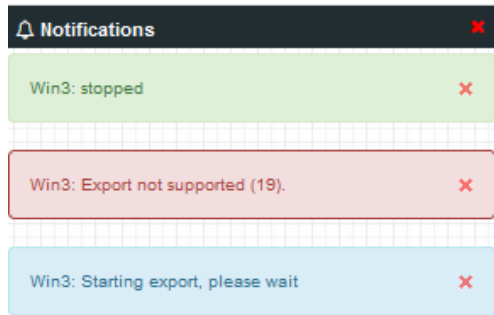


The Notification area in the top right is displaying informational or error messages.

8 Working with EVE labs

⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section [12](#)

8.1 Creating a lab

Step 1: Click Add new lab. For more information on creating new labs, please refer to section [6.2.2.1](#)

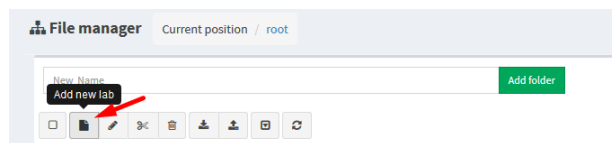

Step 2:

Fill out the lab information. Name and Version are required fields. Next hit Save. Refer to section [6.7.4](#) for more information about the different fields in the Edit lab window.

The 'Add New Lab' form contains the following fields and options:


- Name:** mylab4 (with a note: 'Use only [a-zA-Z0-9_].chars')
- Version:** 1 (with a note: 'Must be integer (0-65535)')
- Author:** John Tester
- Description:** It is my new lab
- Tasks:** A list of tasks: 1. configure IP addressing, 2. configure EIGRP AS 20, 3. configure static default route to the Internet.
- Config Script Timeout:** 300 Seconds
- Lab Countdown Timer:** 0 Seconds
- Buttons:** Save, Cancel
- Footer:** * - Required Fields

8.1.1 Adding nodes to the lab


The new Topology page will open. There are two different ways to add nodes to the topology canvas:

Step 1: Object/Add Node

Left Side Bar > Add object > node. Refer to section [7.1.1.1](#) for more information.

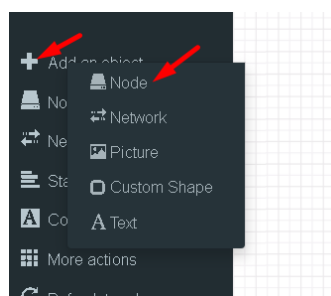


Right click on a free area of the topology page and click on "Node" to add a new node. Refer to section [7.2.1](#) for more information.

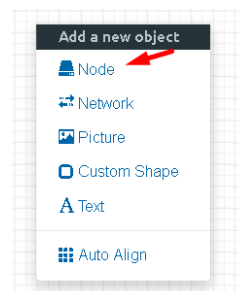

Step 2: The Add new node window will appear. You can scroll down to choose which node you wish to add to the lab topology, or you can type the node name to filter through the node list.

NOTE: It will only be possible to select and add nodes that have images preloaded in EVE. These nodes will be displayed in a blue font. To prepare images for EVE, refer to section [□](#)

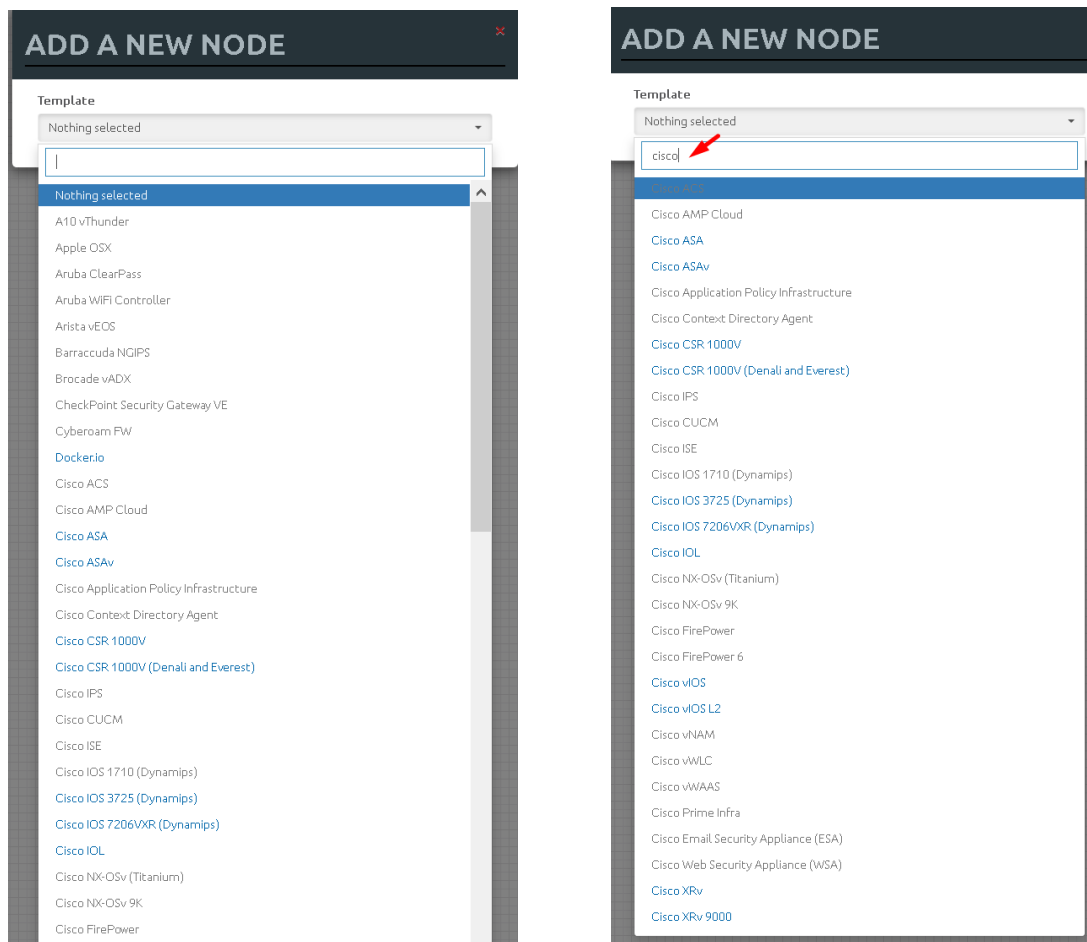

Step 3: Edit "Add a new node" settings. Please refer to the picture and table below.

ADD A NEW NODE

Template **1.**
Cisco CSR 1000V

Number of nodes to add **2.** Image **3.**
csr1000v-universalk9.03.17.04.S.156-1.S4

Name/prefix **4.**
CSR

Icon **5.**
CSRv1000.png

UUID **6.**

CPU Limit ☐ **7.**

CPU **8.** RAM (MB) **9.** Ethernets **10.**

QEMU Version **11.** QEMU Arch **12.** QEMU Nic **13.**

QEMU custom options **14.**
-machine type=pc-1.0,accel=kvm -serial mon:stdio -nographic -nodefconfig -no

Startup configuration **15.**
None




Delay (s) **16.**

Console **17.**
telnet

Left Top

8.1.1.1 Node values Table

Number	Description
--------	-------------

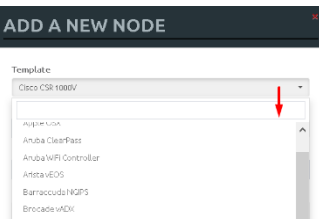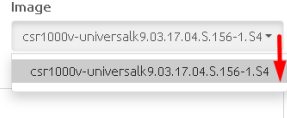1.	 <p>Template menu. Choose which node template to add to the topology</p>
2.	<p>Number of nodes to add</p> <input type="text" value="1"/> <p>Chose the number of nodes of this type you want to add to the topology</p>
3.	 <p>Choose your preferred version from preloaded images list (if you have more than one image loaded for a single template).</p>
4.	<p>Name/prefix</p> <input type="text" value="CSR"/> <p>Type your preferred node name. If you are adding more than one, EVE will automatically append numbers to the nodes name.</p> <p>Example. We are adding 5 CSR nodes with the name R. On the topology they will appear as R1, R2, R3, R4, R5. Later using the Nodes window, you can edit the node names per your needs. Refer to section 7.1.2 or edit the node individually, refer to section 8.1.2.</p>
5.	 <p>Node icons can be changed from the default per your preference, simply choose the preferred icon from the dropdown list. Node icons can be changed later per your needs. Refer to section 7.1.2</p>
6.	<p>UUID</p> <input type="text"/> <p>The UUID number is assigned automatically after a node is created. You may also set it manually in case you are using a license that is tied to a particular UUID.</p>
7.	<p>CPU Limit <input type="checkbox"/></p> <p>CPU limit per node. This option is already set (checked/unchecked) per EVE recommendations. Refer to section 6.4.1</p>
8.	<p>CPU</p> <input type="text" value="1"/> <p>Each node template has a pre-set CPU value that aligns with vendor requirements. This value can be changed per your needs.</p>

9.	<p>RAM (MB)</p> <input type="text" value="3072"/> <p>Each node template has a pre-set RAM value that aligns with vendor requirements. This value is displayed in MB and may be changed per your needs.</p>
10.	<p>Ethernets</p> <input type="text" value="4"/> <p>The number of ethernet interfaces.</p> <p>⚠ NOTE for IOL nodes:</p> <p>Ethernet interfaces for IOL nodes are placed into groups of 4. A value of 1 for Ethernet means your node will have 4 interfaces.</p> <p>The serial interface option is available for IOL nodes only and follows the same grouping structure as ethernet interfaces. A value of 1 for Serial means your node will have 4 serial interfaces.</p> <div> <p>Ethernet portgroups (4 int each)</p> <input type="text" value="1"/> <p>Serial portgroups (4 int each)</p> <input type="text" value="1"/> </div>
11.	<p>Custom MAC address for Qemu nodes only. You can define your own MAC address for first interface:</p> <p>First Eth MAC Address</p> <input type="text" value="aa:bb:cc:00:de:ad"/>
12.	<p>QEMU Version</p> <input type="text" value="tpl(2.12.0)"/> <p>EVE will pre-set the best recommended QEMU version for each node template. This value can be changed per your needs.</p>
13.	<p>QEMU Arch</p> <input type="text" value="tpl(x86_64)"/> <p>Qemu architecture is pre-set per image vendor recommendations. This value can be changed per your needs</p>
14.	<p>QEMU Nic</p> <div> <input type="text" value="tpl(vmxnet3)"/> <ul style="list-style-type: none"> virtio-net-pci e1000 e1000-82545em vmxnet3 tpl(vmxnet3) </div> <p>Type of Qemu NIC is pre-set per image vendor recommendations. This value can be changed per your needs.</p>
15.	<p>QEMU custom options</p> <input type="text" value="-machine type=pc-1.0,accel=kvm -cpu Nehalem -serial mon:stdio -nographic -r"/> <p>Qemu custom options are pre-set per image vendor recommendations. This value can be changed per your needs</p>

16.	<div>Startup configuration</div> <div>None</div> <p>Startup configuration: Value can be changed to set your node to boot from saved configurations. Refer to section 10.3 for more details.</p>
17.	<div>Delay (s)</div> <div>0</div> <p>The Delay value is set in seconds and can be used to delay a node from booting after it is started. Example: if the value is set to 30, the node will wait 30 seconds before processing its boot sequence. This feature is useful in conjunction with the “Start all nodes” function if your lab requires certain nodes to start up before others or to avoid a mass-start of very heavy nodes.</p>
18.	<div>Console</div> <div>telnet</div> <p>Console types for each template are pre-set with recommended settings.</p> <p>The setting can be changes per your needs.</p> <p>NOTE: The Docker template contains a wide variety of images, therefore, please refer to section 14.1.3 for recommended console types for each docker image. Windows nodes can use either RDP or VNC but RDP needs to be enabled in Windows itself.</p>
19.	<div>First Eth MAC Address</div> <div></div> <p>OPTIONAL: Templates for Cisco FirePower, F5, Linux, and Citrix have the option to manually set the MAC address for the first ethernet interface. This will enable the use of licenses that are tied to a particular MAC address.</p> <p>MAC Address format must be like: 00:50:0a:00:0b:00</p>


8.1.2 Edit node

EVE provides two ways to edit nodes after being added to the topology canvas.


NOTE: A node must be **wiped** each time an image or startup configuration has been changed.

8.1.2.1 Edit nodes globally

From the Topology page. Click “Nodes” from the left sidebar to bring up the nodes list. Refer to section 7.1.2 for more details.



8.1.2.2 Edit node individually.



Right click on the node and click Edit

The “Edit node” window will appear. It is very similar to the window that is displayed when you add a new node. To change values for the node, refer to the nodes value table in section [8.1.1.1](#).

EDIT NODE

Template

Cisco vIOS

ID

1

Image

vios-adventerprise9-m-15.6.2T

Name/prefix

vIOS

Icon

Router.png

UUID

b5fa3320-98ed-4ea4-ad21-627d427b8a6a

CPU Limit

☐

CPU

1

RAM (MB)

1024

Ethernets

4

QEMU Version

tpl(default 2.4.0)

QEMU Arch

tpl(i386)

QEMU Nic

tpl(e1000)

QEMU custom options

-machine type=pc-1.0,accel=kvm -serial mon:stdio -nographic -nodefconfig -nodef

Startup configuration

None

Delay (s)

0

Console

telnet

Left

839


Top

218

Save

Cancel

8.1.3 Wipe Node

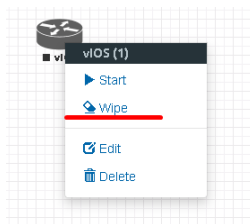


The “Wipe node” function will clear the NVRAM of the node. Each time a node setting is changed (CPU, RAM, boot image or startup configuration) a wipe must be issued on that node. For more information refer to section [10.3](#)

8.1.4 Interconnecting nodes



To connect nodes on the lab, use the drag and drop style method




Connector symbol: Moving the mouse over a node will make an orange male plug appear. The male plug is used to connect nodes on the topology, drag and drop style. Release the mouse pointer on the second node.

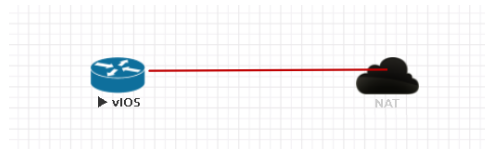

The connection window will appear. Choose the interface you want to use to interconnect the nodes. Click Save when finished.

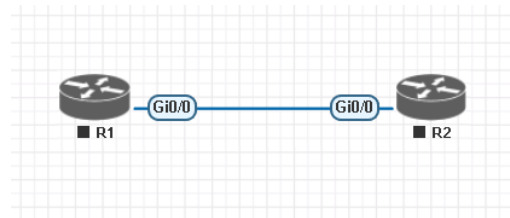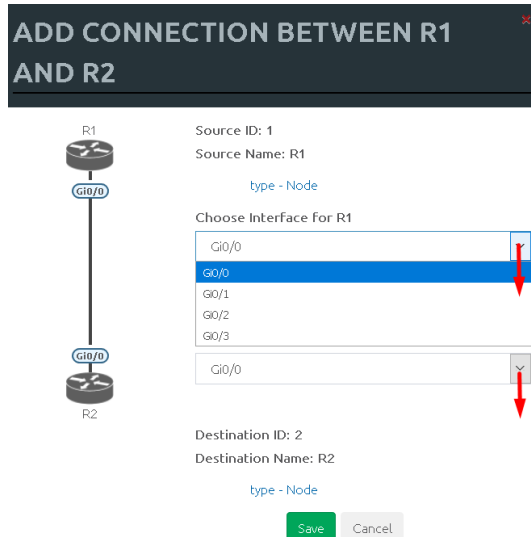


8.1.5 Delete connection between nodes

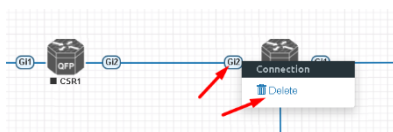

To delete a connection, right click on it and hit “Delete.”

8.1.6 Delete Node



To delete a node, right click it and hit “Delete.” This is a non-reversible function

NOTE: It is strongly recommended to delete connections from a node before deleting the node itself.

8.2 Running labs

8.2.1 Starting lab

Nodes inside a lab may be started individually, in groups, or all at once.





The Start all nodes option will start all nodes on your topology.


⚠ IMPORTANT. Starting all the nodes at once can result in major spikes in CPU utilization. Please make sure you are not using the “Start all nodes” option for heavy labs. Instead, it is recommended to start nodes in small groups.

Starting a node or group of nodes:

Right click on single node or node group and hit “Start.”

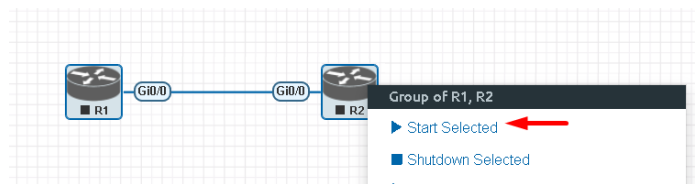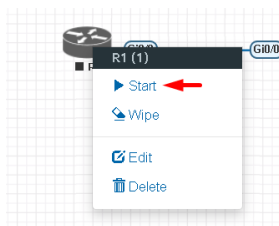

Running nodes will turn blue. Refer to section 7.3 for node states

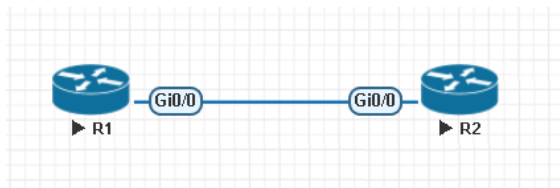

8.3 Saving labs

To save a running lab, refer to the vendor recommended save commands for each node.

Example:

Cisco: “copy run start”

Juniper “commit”

Your current work will be saved in the nodes’ NVRAM and the lab can be stopped safely. Starting the lab again will allow you to pick up from where you left off.

⚠ WARNING: Using the wipe action on a node will clear its NVRAM. This is similar to doing a factory reset on a device.

The configurations of nodes can be exported and used as initial or startup configurations for your labs. To export configurations and configuration sets for labs refer to section [10.1](#)

8.4 Stopping labs

■ Stop all nodes

The Stop all nodes option will stop all nodes on your topology.

NOTE: It is recommended to save your running configurations before you stop your nodes.


Stopping a node or group of nodes:

Right click on single node or node group and hit “Stop.”

For individual node Stop options refer to section [7.2.5](#)

8.5 Start saved lab

Select the lab you want to start and click “Open”. To start Lab refer section [8.2.1](#)

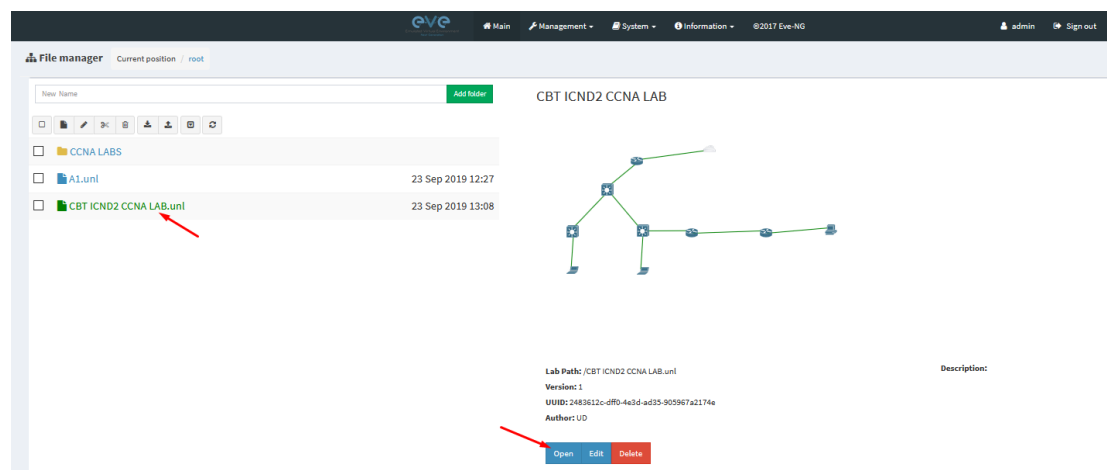

8.6 Importing labs

Refer to section [6.2.2.6](#)

8.7 Exporting labs

Refer to section [6.2.2.5](#)

8.8 Deleting labs

Refer to section [6.2.2.2](#)

8.9 Moving labs

Refer to section [6.2.2.4](#)


9 EVE Clouds and Networks

9.1 Bridge Network

The EVE Bridge interface acts like an unmanaged Switch. It supports passing along tagged dot1q packets.

Example: We have to connect many nodes in a flat (dot1q) network

Step 1: Add a Bridge Network onto the topology. There are two ways to do this: Right-clicking on the topology area and selecting “Add Network” or in the sidebar click “Add an Object” and then select “Network.” Please refer to sections [7.2.3](#) and [7.1.1.2](#)

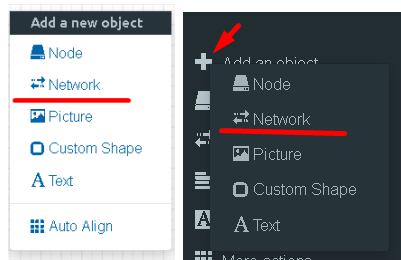

Step 2: Name/prefix can be changed in order to rename your Bridge network. Make sure your network type is set to bridge.

ADD A NEW NETWORK

Number of networks to add:

Name/Prefix: ←


Type: bridge ←

Left:

Top:

Save Cancel

Step 3: Connect your nodes using the drag and drop connector. Refer to sections [8.1.4](#) and [7.2.3](#)

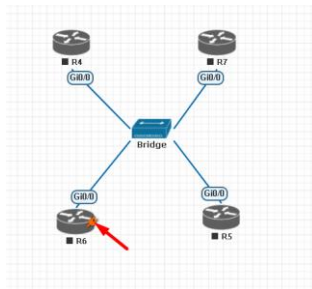

9.2 Management Cloud0 interface

EVE management interface is also known as the Cloud0 network for labs. The Cloud0 interface is bridged with your EVEs first NIC. “Cloud” is used as an alias to pnet. Pnet is the bridge interface name inside of EVE.

```
# The primary network interface
iface eth0 inet manual
auto pnet0
iface pnet0 inet dhcp
bridge_ports eth0
bridge_stp off
```

Cloud0 is commonly used inside EVE labs to get management access to nodes running inside EVE from a host machine external to EVE.

⚠ IMPORTANT NOTE: For EVE VMs running on ESXi, make sure your management interface bridged with the vSwitch (Port group) has the security settings for Promiscuous Mode set to Accept. Any port group or vSwitch used to connect an external network to an EVE Cloud network needs to have the Promiscuous mode set to “Accept”!

vSwitch Settings

Edit standard virtual switch - vSwitch1

Add uplink

MTU	1500
Uplink 1	vmnic1
Link discovery	Click to expand
Security	
Promiscuous mode	<input checked="" type="radio"/> Accept <input type="radio"/> Reject
MAC address changes	<input checked="" type="radio"/> Accept <input type="radio"/> Reject
Forged transmits	<input checked="" type="radio"/> Accept <input type="radio"/> Reject
NIC teaming	Click to expand
Traffic shaping	Click to expand

Portgroup Settings

Management 90 UD

Edit settings | Refresh | Actions

Management 90 UD
Accessible: Yes
Virtual machines: 7
Virtual switch: vSwitch1
VLAN ID: 4095
Active ports: 5

vSwitch topology

Management 90 UD
VLAN ID: 4095
Virtual Machines (7)
vCentre 90.95
S2016 EVE 90.201
EVE-PRO 98.100
MAC Address: 00:0c:29:d0:aa:9e
EVE-PROV24
EVE COMM 89
Cisco Identity Services Engine
ASAv 90.35 PROD

Physical adapters
vmnic1, 100 Mbps, Full

Security policy

Allow promiscuous mode	Yes
Allow forged transmits	Yes
Allow MAC changes	Yes

NIC teaming policy

Notify switches	Yes
Policy	Route based on ori
Reverse policy	Yes
Rolling order	No

Shaping policy

Enabled	No
---------	----

EVE Cloud0 bridging table.

Lab name	EVE interface name (inside)	Type	Notes
Cloud0	pnet0	Bridged	Cloud0/pnet0 is bridged with your primary EVE ethernet port. It is assigned a management IP address used for WEB GUI access. The EVE management subnet can be used as a management network in labs.

Question: How can I obtain my Cloud0 subnet and gateway IP. Many EVE VMs only have a DHCP address assigned on the pnet0 interface.

Answer: SSH to EVE and type the following from the CLI:

ip route

```
root@eve-ng:~# route
Kernel IP routing table
Destination Gateway Genmask Flags Metric Ref Use Iface
default 192.168.90.1 0.0.0.0 UG 0 0 0 pnet0
172.17.0.0 * 255.255.0.0 U 0 0 0 docker0
172.29.129.0 gateway IP type: 255.255.255.0 U 0 0 0 nat0
192.168.90.0 * 255.255.255.0 U 0 0 0 pnet0
root@eve-ng:~#
```

Example: We want to use Cloud0 as a management network for an ASAv node in an EVE lab. From the above-obtained information, we know that our Cloud management subnet is 192.168.90.0 with a mask of 255.255.255.0 and the Gateway IP is 192.168.90.1.

ADD A NEW NETWORK

Number of networks to add:

Name/Prefix:

Type:

Left:


Top:

Step 1: Add A New Network onto the topology. There are two ways to do this: Right-clicking on topology area and selecting “Network” or in the sidebar, “Add an Object” and then select “Network.”


Step 2: Name/prefix can be changed in order to rename your Cloud0 network. Make sure your network type is set to Management(Cloud0).

Step 3: Connect your ASAv using the drag and drop connector to the Cloud0 network. Refer to sections [8.1.4](#) and [7.2.3](#)

Step 4: Start the node and configure the interface connected to Cloud0 with an IP address from the management subnet (192.168.90.0/24 in this example). Make sure you do not assign duplicate IPs.

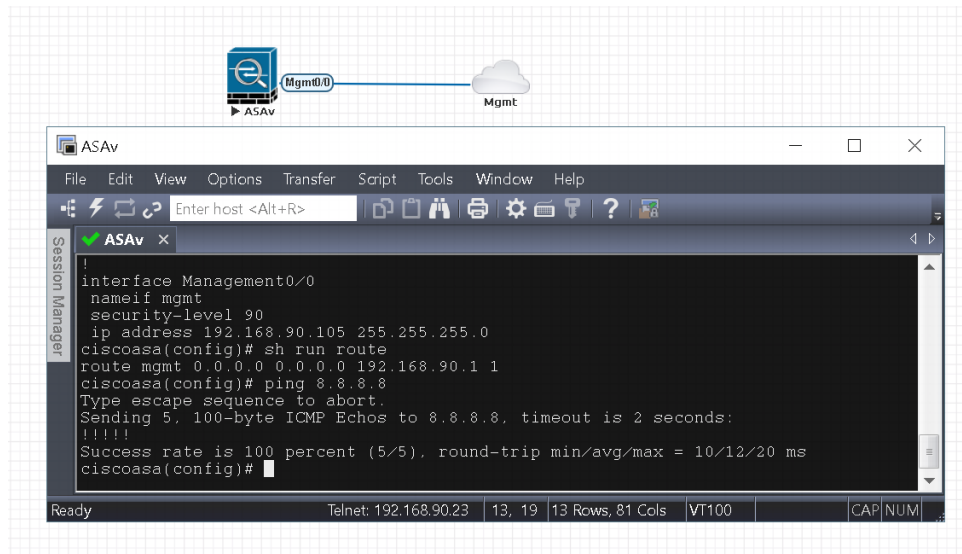

NOTE: Cloud interfaces can be used to connect multiple nodes to a single cloud instance on the topology.

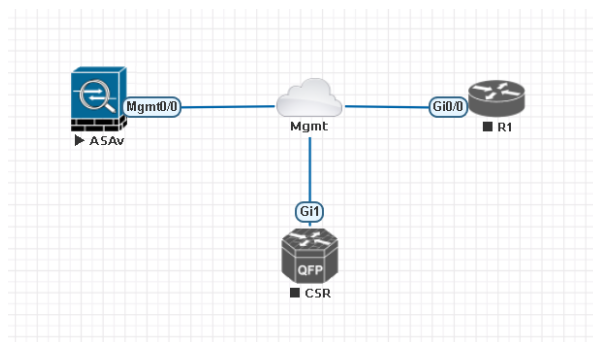

9.3 Other cloud interfaces

Other cloud interfaces can be used to extend a lab connection inside of EVE or bridged with other EVE interfaces to connect external networks or devices.

EVE Cloud bridging table.

Lab cloud name	EVE interface name (inside)	Type	ESXi VM corresponding interface	VMware Workstation corresponding interface	Bare HW Server	Notes
Cloud0	Pnet0	bridged	Network adapter 1	Network Adapter	First ethernet Eth0	Cloud0/pnet0 is bridged with your primary EVE ethernet port. It is assigned a management IP address used for WEB GUI access. The EVE management subnet can be used as management network in the labs.

Cloud1	Pnet1	bridged	Network adapter 2	Network Adapter 2	Second ethernet Eth1	Cloud1 can be bridged with your EVE second ethernet port to achieve connection to another network or device. The IP address is not required to be configured on it. It will act like a pure bridge your external connection with EVE lab node.
Cloud2	Pnet2	bridged	Network adapter 3	Network Adapter 3	Third ethernet Eth2	Same as Cloud1
Cloud3	Pnet3	bridged	Network adapter 4	Network Adapter 4	Fourth ethernet Eth3	Same as Cloud1
Cloud4-9	Pnet4-9	bridged	Network adapter 5-10	Network Adapter 5-10		Same as Cloud1

Example: Cloud7 network is used as an extended connector between nodes:

Step 1: Add two Cloud7 networks onto the topology.

ADD A NEW NETWORK

Number of networks to add:


Name/Prefix:

Type:

Left:

Top:

Step 2: Connect your lab nodes to Cloud7. Your configured nodes will work like being connected to the same switch (or the same bridge in EVE). Even CDP works. It is convenient if it is necessary to have connections across the lab and you don't want to have connections going from one end of the lab to the other.

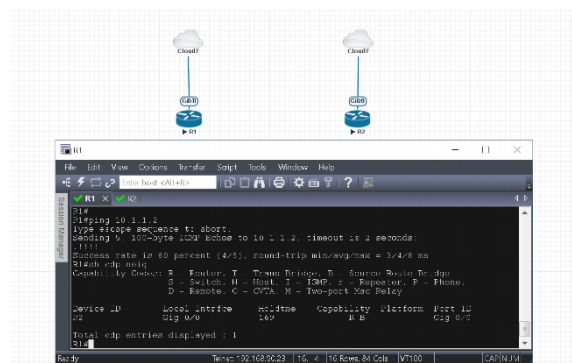

If some of the clouds (e.g. Cloud1) are bridged to another ethernet (VMnet) you can connect your EVE lab to an external VM or physical device (like e.g. a switch, IP phone or access point).

⚠ For ESXi make sure that you have set Promiscuous mode security settings on the vSwitch and Port group to Accept. Please refer to section [9.2](#)

The next sections will explain how you can use Cloud networks in EVE to connect to other external (e.g. VMWare) VMs or physical devices.

9.4 Connecting external VM machines to the EVE Lab

9.4.1 ESXi VM machines

External ESXi VM machines can be connected to EVE labs using cloud interfaces.


NOTE: A single Cloud interface can be used to connect more than one external VM to the EVE lab.

Example: Connecting a Web Security Appliance (WSA) to the lab using the Cloud1 interface.

Step 1: Create a new or use an existing portgroup on your ESXi and assign it to EVE and WSA VMs as shown below. Make sure you have set Promiscuous mode on the vSwitch (portgroup WSA-MGMT) to Accept.

NOTE: VM machines must be in a powered off state to assign network interfaces.

Portgroup WSA-MGMT (with vSwitch5 as parent) settings:

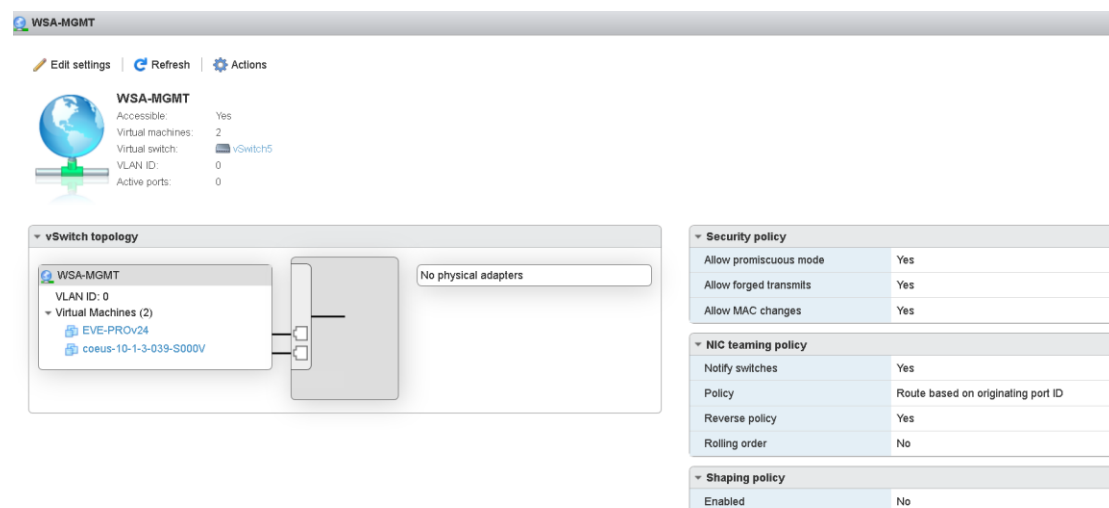

WSA-MGMT

Accessible: Yes
Virtual machines: 2
Virtual switch: vSwitch5
VLAN ID: 0
Active ports: 0

vSwitch topology

WSA-MGMT
VLAN ID: 0
Virtual Machines (2)
EVE-PROV24
coeus-10-1-3-039-S000V

No physical adapters

Security policy	
Allow promiscuous mode	Yes
Allow forged transmits	Yes
Allow MAC changes	Yes

NIC teaming policy	
Notify switches	Yes
Policy	Route based on originating port ID
Reverse policy	Yes
Rolling order	No

Shaping policy	
Enabled	No

Parent vSwitch5 settings:

EVE and WSA VMs settings

EVE VM, second port is assigned to portgroup WSA-MGMT. It is Cloud1 on the EVE topology.

Hardware Configuration	
CPU	16 vCPUs
Memory	32 GB
Hard disk 1	40 GB
Hard disk 2	150 GB
USB controller	USB 2.0
Network adapter 1	Management 90 UD (Connected)
Network adapter 2	<u>WSA-MGMT (Connected)</u>
Video card	4 MB
Others	Additional Hardware


Cisco Web security appliance (WSA), Management port is assigned in portgroup WSA-MGMT.

Hardware Configuration	
CPU	1 vCPUs
Memory	4 GB
Hard disk 1	250 GB
Network adapter 1	<u>WSA-MGMT (Connected)</u>
Network adapter 2	UNUSED (Connected)
Network adapter 3	UNUSED (Connected)
Network adapter 4	UNUSED (Connected)
Network adapter 5	UNUSED (Connected)

EVE Lab connected to the WSA (Cloud1)

⚠ NOTE: ESXi WSA VM obtained the IP 192.168.10.3 from the DHCP pool on the lab switch. The gateway is 192.168.10.1

⚠ NOTE: The Firefox Docker node user for management obtained the IP 192.168.10.2 from the DHCP pool configured on the lab switch.

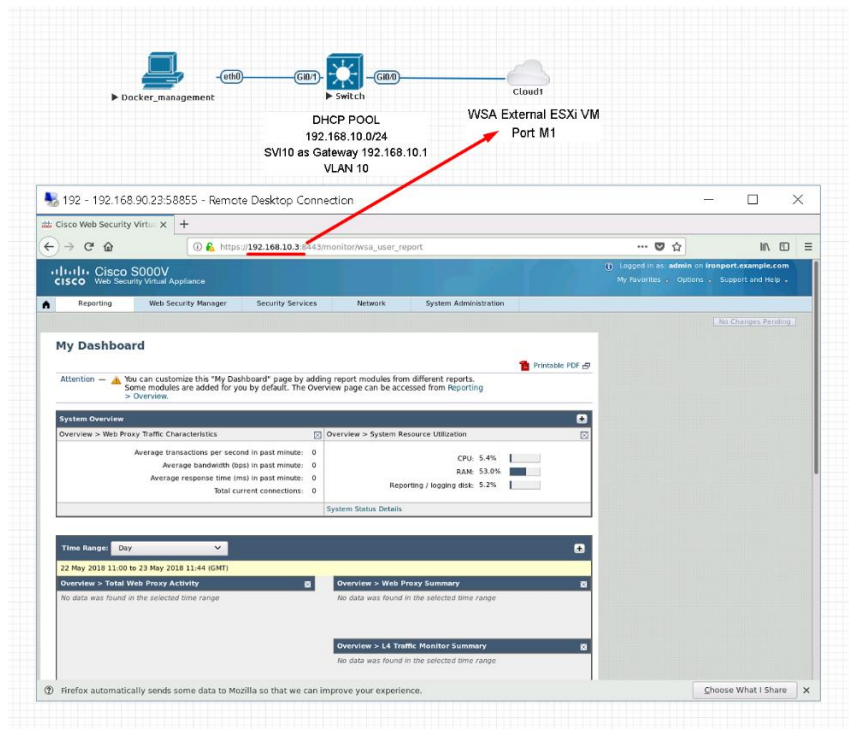

9.4.2 VMWare workstation machines

External (meaning not running inside EVE) VMWare workstation machines can be connected to EVE labs using cloud interfaces.


NOTE: A single Cloud interface can be used to connect more than one external VM to the EVE lab.

Example: Connecting Web security Appliance (WSA) to the lab using **Cloud2** interface.

NOTE: VMs must be in a powered off state to assign network interfaces.


Step 1: Open your VMWare Workstation Virtual Network Editor and configure the VMnet interface for the Cloud and WSA VMs. If necessary, add a new VMnet. The example below is showing VMnet2 Settings in VMWare workstation. DHCP must be disabled for VMnet2.

Virtual Network Editor settings:

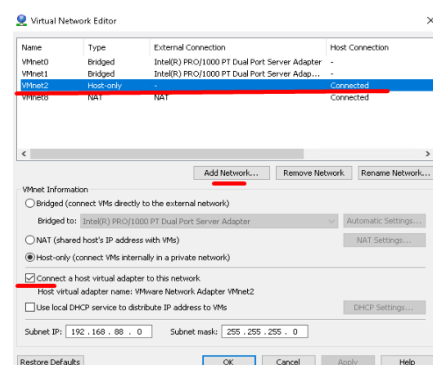


EVE and WSA VMs settings

EVE VM, the third port (Network adapter 3) is assigned to VMnet2. This is Cloud2 inside your EVE labs.

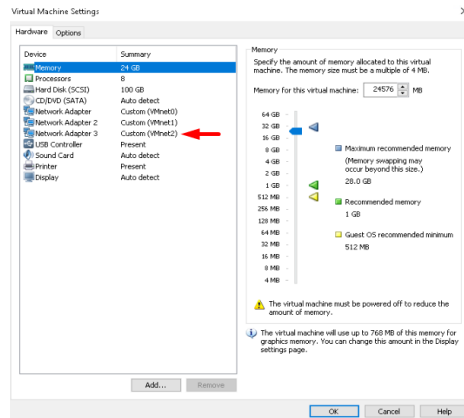


Cisco Web Security Appliance (WSA), Management port is assigned to VMnet2

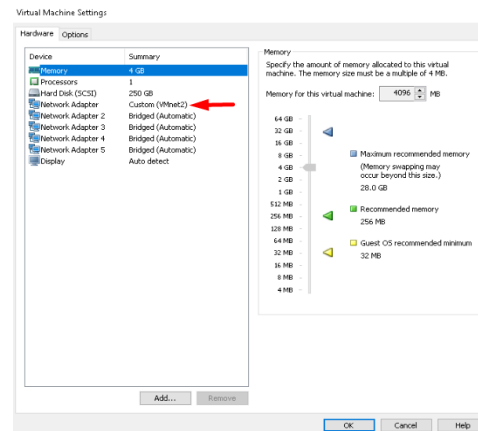

EVE Lab connected to the WSA (Cloud2)

⚠ **NOTE:** ESXi WSA VM obtained the IP 192.168.10.3 from the DHCP pool on the lab switch. The gateway is 192.168.10.1

⚠ **NOTE:** The Firefox Docker node user for management obtained the IP 192.168.10.2 from the DHCP pool configured on the lab switch.

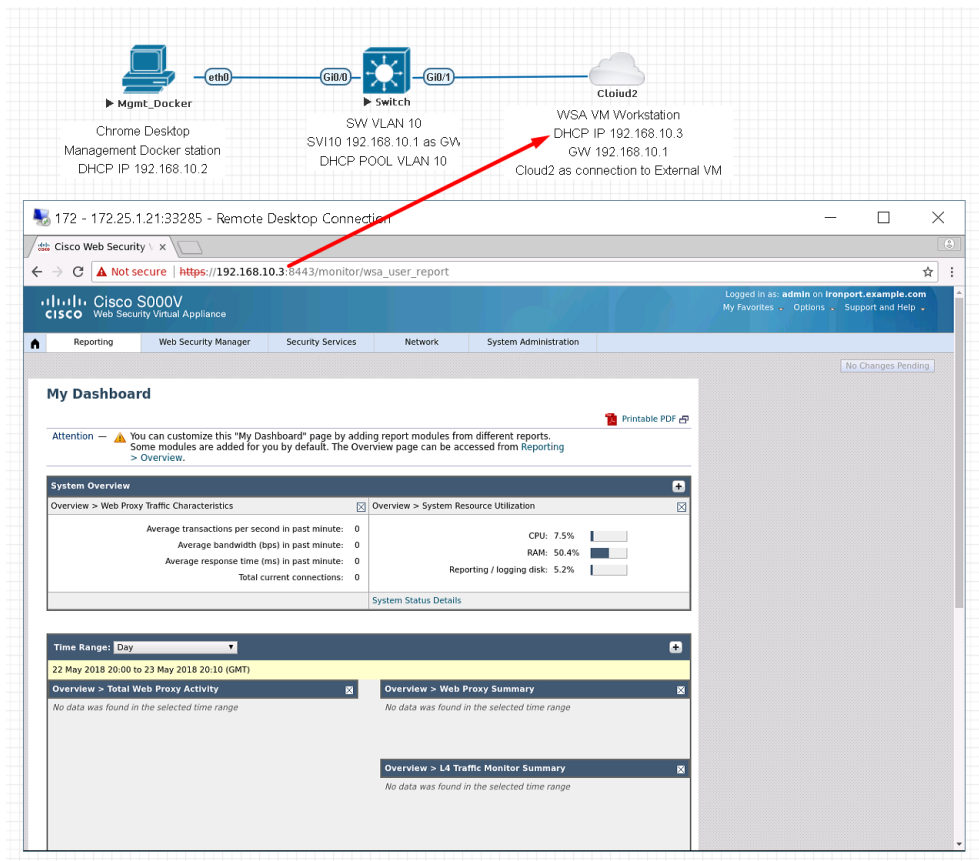

9.5 Connecting EVE Lab to a physical device

⚠ IMPORTANT NOTE: To bypass MAC addressing over pnet/cloud interface please SSH to your EVE and type:

```
for i in $(cat /sys/class/net/pnet*/bridge/group_fwd_mask) ; do echo 8 > $i ; done
```

9.5.1 ESXi EVE

To connect a physical device (e.g. router, switch) to an EVE lab over a cloud interface, we have to bridge the ESXi NICs ethernet port to a VMnet interface.

⚠ IMPORTANT NOTE: Make sure that you have set Promiscuous mode security settings on the vSwitch and Port group to Accept.

⚠ IMPORTANT NOTE: If you are building trunk between EVE lab node to real Switch, please make sure you have set your ESXi vSwitch interface to accept all vlans. Reference: <https://kb.vmware.com/s/article/1004074>

The **Example** below is showing ESXi Server settings of the virtual network bridged to the physical interface.

Logical chain of the networking bridge:

EVE Lab Cloud0 → Portgroup “Management 90 UD” → vSwitch 1 → Physical Adapter eth1


vSwitch1 settings bridged with Server Ethernet port vmnic1 (physical adapter)

The screenshot displays the configuration of vSwitch1 in a vSphere environment. The left pane, titled 'vSwitch1', shows the following details:

- vSwitch Details:**
 - MTU: 1500
 - Ports: 4352 (4317 available)
 - Link discovery: Listen / Cisco discovery protocol (CDP)
 - Attached VMs: 7 (4 active)
 - Beacon interval: 1
- NIC teaming policy:**
 - Notify switches: Yes
 - Policy: Route based on originating port ID
 - Reverse policy: Yes
 - Rolling order: No
- Security policy:**
 - Allow promiscuous mode: Yes
 - Allow forged transmits: Yes

The right pane, titled 'vSwitch topology', shows the connection path: Management 90 UD (VLAN ID: 4095) is connected to vSwitch1, which is connected to vmnic1 (Physical adapters).

Portgroup “Management 90 UD” Settings associated with vSwitch1

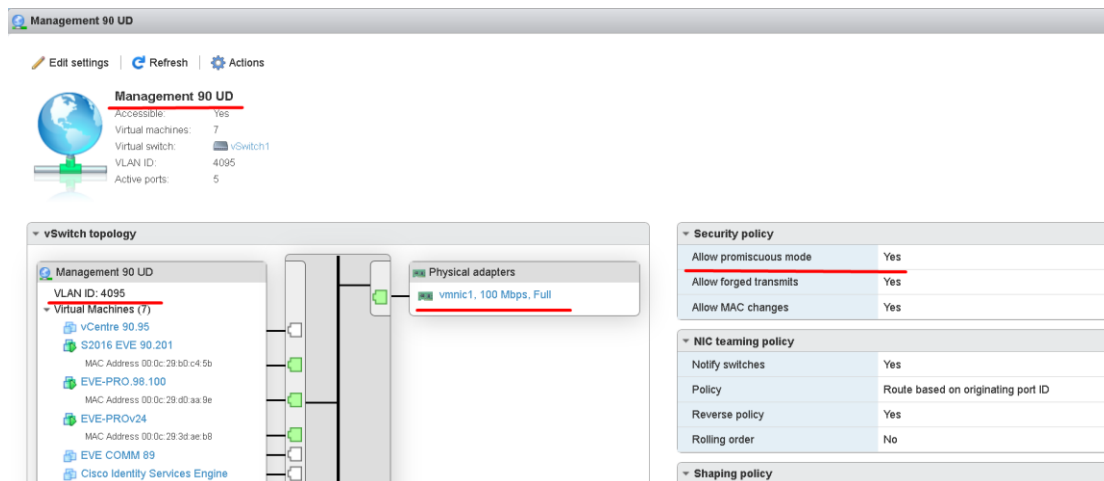

EVE VM Settings


EVE VM Cloud0 is connected to Portgroup “Management 90 UD”

Hardware Configuration	
CPU	16 vCPUs
Memory	32 GB
Hard disk 1	40 GB
Hard disk 2	150 GB
USB controller	USB 2.0
Network adapter 1	Management 90 UD (Connected)
Network adapter 2	WSA-MGMT (Connected)
Video card	4 MB
Others	Additional Hardware

EVE Lab Connected to a physical device


Physical Topology

Cisco 887M device port Fastethernet 3 is physically connected to Server port eth1.

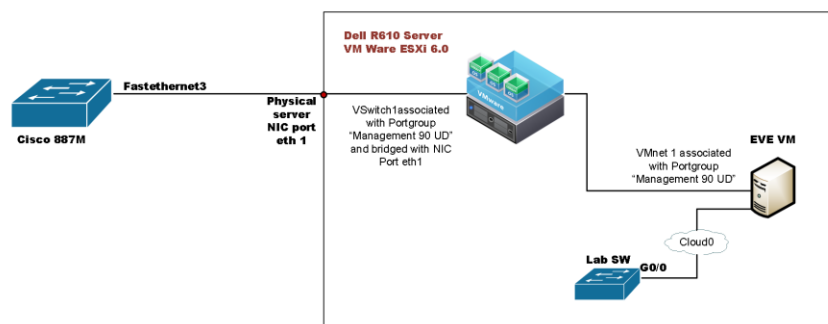

EVE Lab Topology


EVE lab switch port G0/0 is configured as trunk and connected to Cloud0 over bridged chain to the physical Cisco 887M Router switchport Fastethernet 3

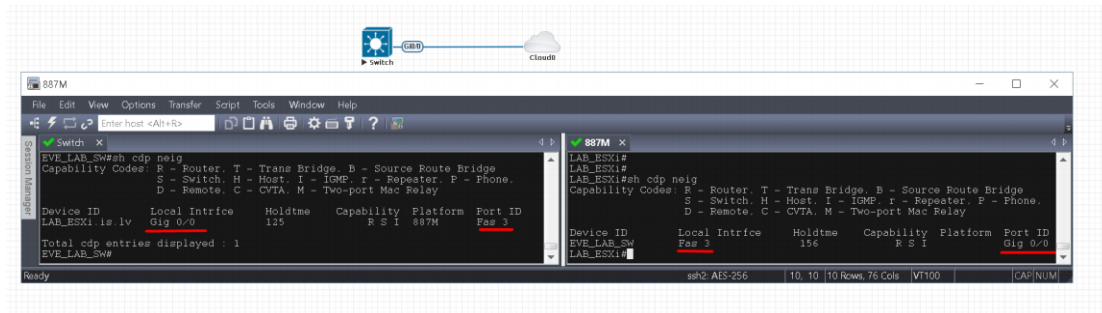

9.5.2 VMWare workstation EVE

Similar to the ESXi connection, it is recommended to have a second ethernet interface on your PC. It can be a USB ethernet extender as well. Not all ethernet adapters fully support a layer2 connectivity over it. MS Windows OS itself strips off any tags added to the packet. Even if your NIC supports 802.1q VLAN tagging, Windows 10 strips these tags off. The example below will show a Windows 10 host connected to a physical 3750G-24 switch. The Windows 10 Host has an Intel (R) PRO/1000 PT Dual port server adapter and is bridged with VMWare workstation (version 14) VMnets.

Virtual Network Editor Settings, Bridged VMnet interfaces with Real NIC Ports

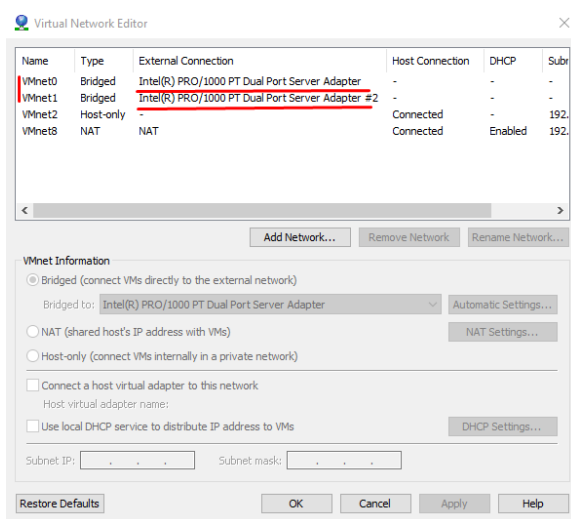


EVE VM Settings. Network adapter is bridged to VMnet0 (ethernet Intel Pro 1), and Network adapter 2 is bridged to VMnet1 (ethernet Intel Pro 2).


Responding cloud interfaces on EVE VM:

Cloud0→Network Adapter→VMnet0→IntelPro


Cloud1→Network Adapter 2→VMnet1→IntelPro#2

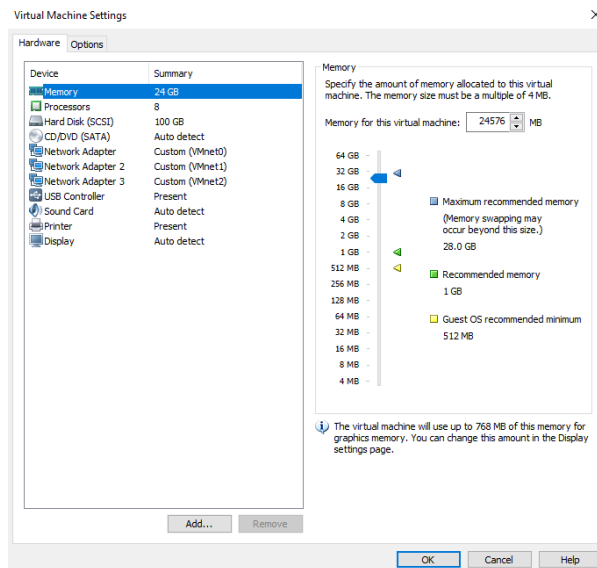

Physical connection scheme and VMware bridging.

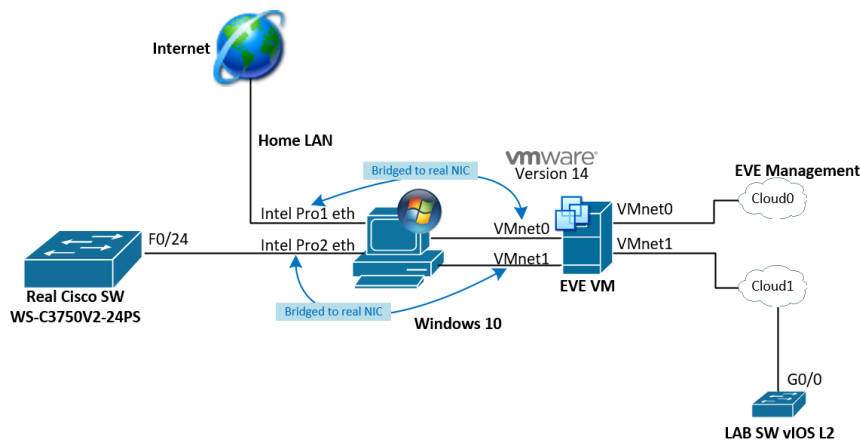

EVE Lab scheme.

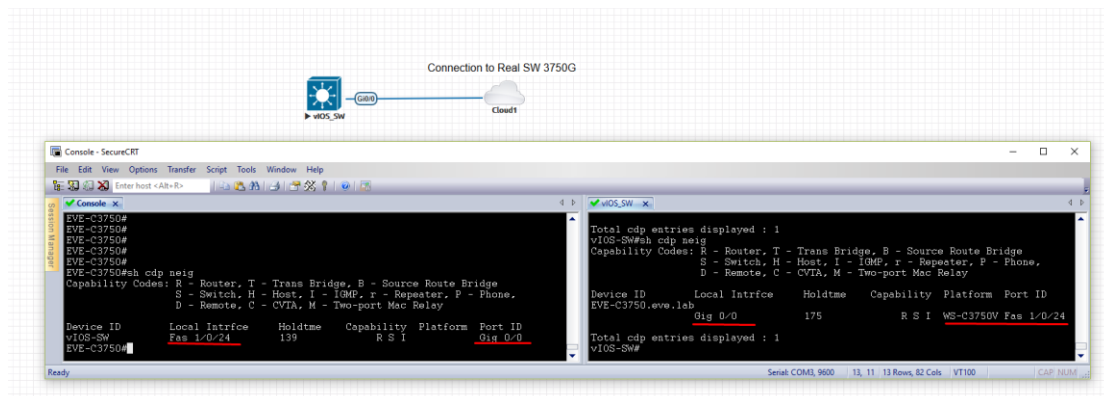

The following solution allows Windows hosts to transmit tagged packets over ethernet. This has been used in the example above.

⚠ Warning. You are making changes to your Windows registry files! This is at your own risk.

<https://www.intel.co.uk/content/www/uk/en/support/articles/000005498/network-and-io/ethernet-products.html>

9.5.3 Bare metal server EVE

A physical server usually has more than one ethernet port, free ports can be bridged with EVE clouds and used for external connections. EVEs internal interface settings are already bridged in order, pnet0-9 are mapped to eth0-9. Refer to the bridging table in section 9.3

```
cat /etc/network/interfaces
```


```
# Cloud devices
iface eth1 inet manual
auto pnet1
iface pnet1 inet manual
bridge_ports eth1
bridge_stp off

iface eth2 inet manual
auto pnet2
iface pnet2 inet manual
bridge_ports eth2
bridge_stp off
```

Basically, your servers physical port eth0 is bridged to pnet0 which is Cloud0 in your labs, eth1 is bridged to pnet1 which is Cloud1 in your labs (and so on). Refer to the bridging table in section 9.3

The example below shows how to connect a bare-metal EVE server with a physical Cisco 3750E switch.

Physical connection topology:

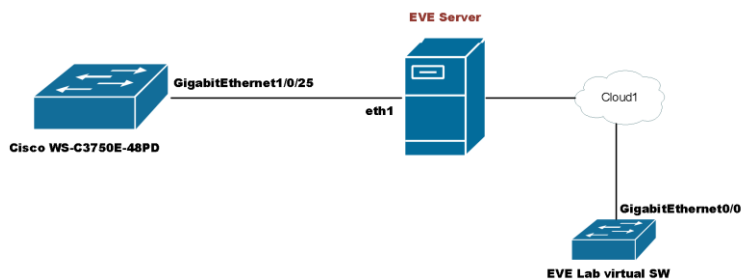

The EVE lab switch's CDP neighbor is the 3750E switch's port Gig 1/0/25: A trunk has been configured between the EVE lab switch and the physical 3750E switch.

```
Switch#sh cdp neig
Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone,
D - Remote, C - CVTA, M - Two-port Mac Relay

Device ID    Local Intrfce   Holdtme    Capability  Platform  Port ID
NottaCoreRackSwitch1.DataServices.local
Gig 0/0      140           R S I WS-C3750E Gig 1/0/25


Total cdp entries displayed : 1
Switch#
```

10 Advanced EVE Lab features


10.1 Lab design objects

EVE Community has drawing elements integrates to add drawings and text information to the lab topology. Objects can be placed on the topology in two ways.


Example below, EVE lab with design elements:

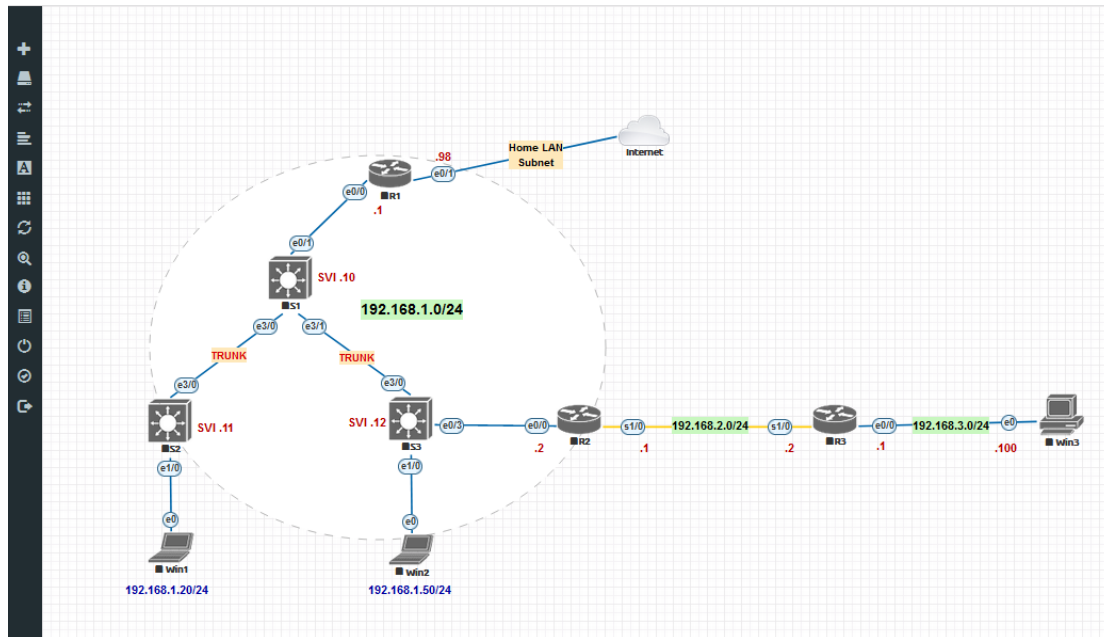

Option 1: Side bar -> Add an object

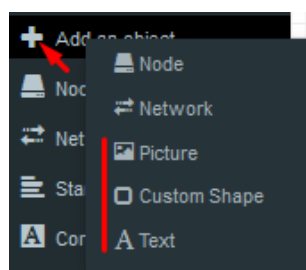

Option 2: Right-click on a free area on the topology canvas to add an object.

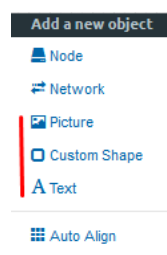

10.1.1 Custom shape

There are three custom shapes that can be added to the topology: square, round square and circle (sphere).

Type: Square, round square or circle

Name: This field can be filled with your preferred shape's name. If the field is left empty, EVE will generate a name for the shape.


Border type: Two options: line or dashed

Border width: Increase or decrease the width of the border. This can be edited later in the “Shape Edit” menu.

Border colour: Allows you to choose a colour for the shape’s border. This can be edited later in the “Shape Edit” menu.


Background colour: Allows you to choose a colour to fill your shape with. This can be edited later in the “Shape Edit” menu.

Example: Added a circle and square on the topology. Shapes can be moved around the topology drag and drop style (click and move with mouse).




10.1.2 Resize square or circle objects

Move your mouse over the right bottom corner of the object until a corner symbol appears. Left click and drag your mouse to change object size or style (rectangle, sphere)

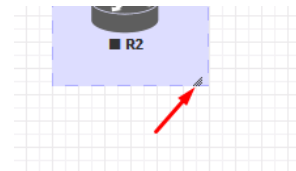

10.1.3 Text object

It is also possible to add text to your EVE topology.

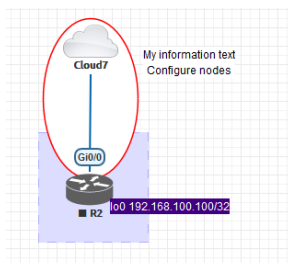

Example: text objects added to the topology.

10.1.4 Add custom picture on the Lab using Text object feature

Sometimes you may have to add pictures, like logos on your topology. It is possible but you need to convert your png or jpg to html format. We have tested this one as the best to achieve result. Load your image in the web, and convert to html format.

<https://www.askapache.com/online-tools/base64-image-converter/>

Step 1: Load your picture jpg or png format and encode it.


Step 2: Scroll down to find HTML format

HTML

```

```

Step 4: Mark and copy all content from HTML window above

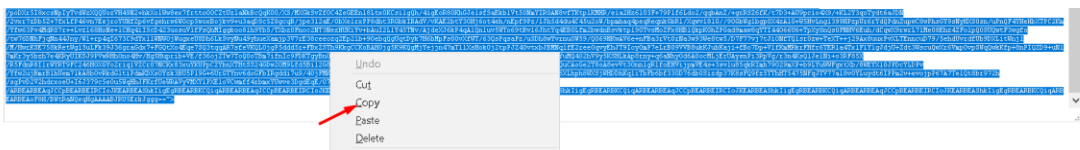

Step 4: Copy content to EVE text object

ADD TEXT
✕

Text

```
/O7BDM9zWubWRKghlFxFugiAlhUSm
/ARBEARBEAqJCCpBEARBEIRClOJKEARBEAshkligE
gRBEARBKQiqARBEARBEAqJCCpBEARBEIRClOJK
EARBEAshkligEgRBEARBKQiqARBEARBEAqJCCp
BEARBEIRClOJKEARBEAshkligEgRBEARBKQiqAR
BEARBEAqJCCpBEARBEIRClOJKEARBEAshkligEgR
BEARBKQiqARBEARBEAqJCCpBEARBEIRClOJKEA
RBEAshkligEgRBEARBKQiqARBEARBEAoF8H
/BWtRaNQeqHgAAAABJRUSErkJggg==">
```

Font Size:


Font Style:

Font Color:

Background Color:


Save
Cancel

Step 5: Move and place your picture to the Lab.

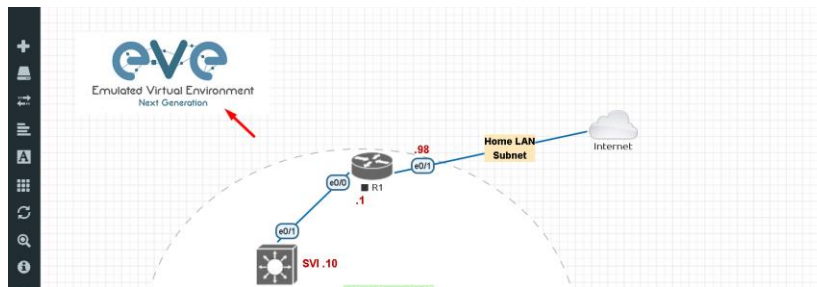


10.1.5 Cloning objects and overlay positions

Right click on the object you want to clone and choose “Duplicate”. You can also change the object’s overlay position using the “Send to Back” or “Send to front” options.

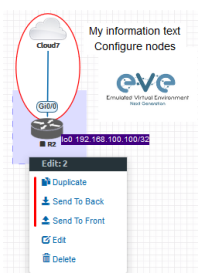

10.1.6 Objects Editing


Right click the object and choose “Edit” for additional options.

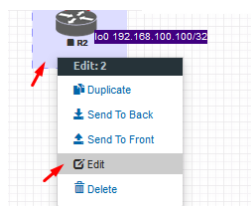

At the bottom of the “Topology Canvas” page, additional object options will appear

Edit: 2								Save	Cancel
Z-index	Border-width	Border-type	Border-color	Background-color	Transparent	Rotate	Name		
-1	1	dashed			Off	0	square2		

Z-index: Used to change the object's overlay position on the "Topology Canvas." An object with a higher numerically valued z-index will cover an object with a lower numerically valued z-indexed.



Example: The blue object has a z-index of -1 and the orange object's z-index is 0. Orange object is top over blue object.


Border width: Used to change the object's border width.

Border type: Used to change the border style of the object between solid and dashed.


Border colour: Used to change the colour of the object's border

Background colour: Used to change the background colour of the object

Transparent: Turns off background colour (filling) and makes the object transparent.



Rotate: Used to rotate the object on the topology.



Name: Used to change the object's name.

To save the object, press Save (green button).



10.1.7 Lock objects movement

The "Lock Lab" feature prevents objects from being moved around on the canvas (among other things). For more information about this feature, refer to section [7.1.12](#).

10.2 Custom design logical topology


EVE Community includes a feature to upload your own custom topology picture and map nodes to it for easy access.

10.2.1 Custom design upload


Before you upload a custom picture in the lab, make sure it is in .png or jpg format with resolution 130-150x130-150 pixels.

TIP: It is best is to create a topology in the MS Visio and after convert it to the .png picture format with resolution 140x140.

Step 1: Open “Add an Object” and then “Pictures” from the left sidebar or right click on a free area on topology canvas and hit “Add Picture.”

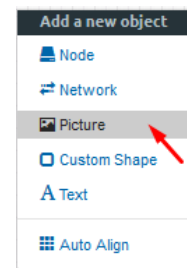


Step 2: Browse your PC for a .png or .jpg file and hit “Add”.

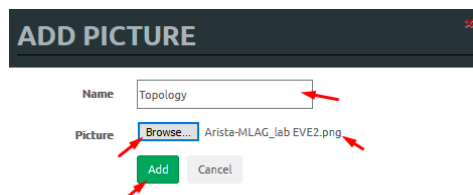

Once the picture is added to the topology canvas, the sidebar will display a new option: “Logical maps”

Step 3: Open the “Logical maps” menu item.



Pictures window management

	Delete uploaded picture from the lab
	Image Map: Map nodes to places in the picture
Topology	Display uploaded picture. Work with lab and custom topology
	Zoom/unzoom uploaded custom topology
	Makes the window transparent to see the “Topology Canvas” behind it. Clicking again returns to the normal view.
	Close “Pictures” window.


10.2.2 Custom topology mapping

This feature allows you to map the lab nodes to your custom topology picture.


Step 1: Open the Image Map window:




Step 2: Select a node, from the dropdown menu, that you want to map to the topology.

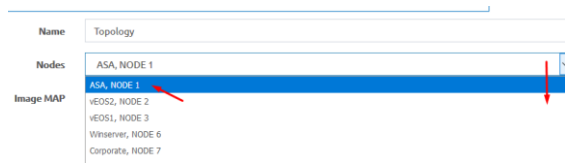

Step 3: Move your mouse over a node icon on the “Image Map” and click to map it. The grey circle means that the node is mapped.

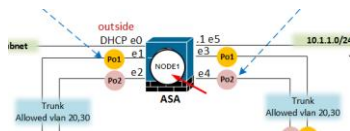

Step 4: Continue mapping the rest of the nodes.

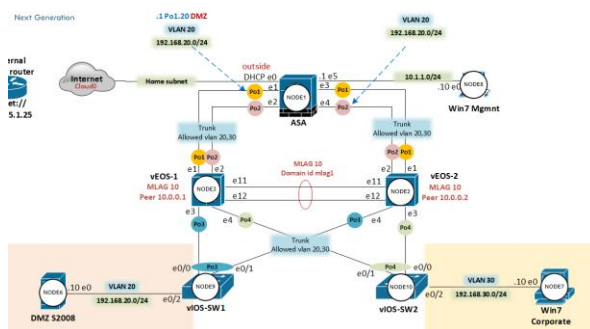

Step 5: OPTIONAL. You can also add a mapping for a device external to your EVE server in order to telnet, VNC, or RDP to it. This way you can open sessions to all your devices (whether external or internal) in one place.

Select from menu:

And map with node on topology.



Change image map adding protocol, IP and port.


Image MAP

Image MAP


Step 6: Save your mapping and refresh the browser with F5.

10.2.3 Delete topology or mapping

To delete a single node mapping, right click on node mapping circle and click “Delete.”



To delete the entire custom topology, click delete.



10.3 Configuration export feature


EVE Community includes an export configuration feature that allows you to save and manage configurations in a lab. The "Configuration Export" and "Startup-configs" features will allow you to set these saved configurations as startup configs for your nodes when they boot.

⚠ IMPORTANT NOTE: Before you start using the "Configuration export" feature, you must complete at least one configuration export.



Nodes will be greyed out without the option to enable "Startup-configs" until you complete at least one configuration export for each node.

Node boot order:

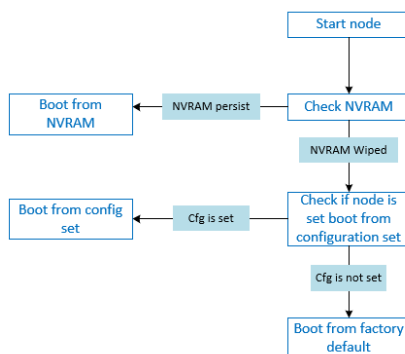

NVRAM: NVRAM is used as writable permanent storage for the startup configuration. During the boot process, the node will always check NVRAM for a saved configuration. Saving the configuration to NVRAM requires a vendor specific command. Cisco: copy run startup (wr), Juniper: commit, etc. It is **MANDATORY** to save a node's configuration before you can export it.

Exported configuration: A node configuration that has been exported from the node. It can be used to backup configurations or to set them as startup-configs.

Wipe node: Wiping a node will erase the NVRAM (running config) or the temporary image snapshot, depending on the type of node. Upon a successful wipe, the node will boot with the factory default configuration or the configuration included in the base image you are using. If you have the "Startup-config" feature enabled for the node, then it will boot with the chosen config set. You must wipe a node after changing certain node template settings like the image or startup-config. You also must wipe the node the first time you want to enable the "Startup-config" feature.


Factory default configuration: The base configuration that is applied from the manufacturer.

10.3.1 Supported nodes for configuration exports

Cisco Dynamips all nodes
Cisco IOL (IOS on Linux)
Cisco ASA
Cisco ASAv
Cisco CSR1000v
Cisco Nexus 9K
Cisco Nexus Titanium
Cisco vIOS L3
Cisco vIOS L2
Cisco XRv
Cisco XRv9K
Juniper VRR
Juniper VMX
Juniper vMX-NG
JunipervQFX
JunipervSRX
Juniper vSRX-NG
Mikrotik
PFsense FW
Timos Alcatel
vEOS Arista


10.3.2 Startup config management

10.3.2.1 Global commands



Configurations can be managed via the “Startup-configs window which can be accessed from the sidebar menu while on the Topology page.

Topology page, More Options:

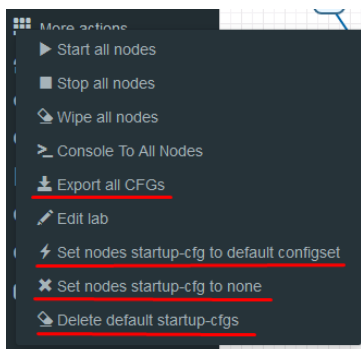

Export all CFGs – Exports all supported node configurations.


Set nodes startup-cfg to default configset- Sets all supported nodes to boot from the default configuration set.

Set nodes startup-cfg to none - Sets all supported nodes to boot from NVRAM configuration.

Delete default configuration set. **Warning**, this will delete your exported default configuration set for all nodes.

10.3.2.2 Individual node commands


Select node, right click

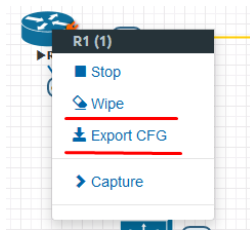

Wipe: Wipes the NVRAM for a single node

Export CFG: Exports the configuration for a single node

10.3.2.3 Multiple selected nodes commands

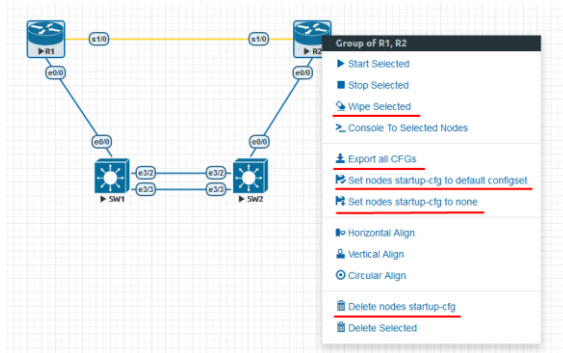

Wipe Selected: Wipes the NVRAM for selected nodes

Export all CFGs: Exports the configuration for selected nodes

Set nodes startup-cfg to default configs set: Set selected nodes to the default config set

Set nodes startup-cfg to none: Set nodes to boot from NVRAM or from factory default if wiped.


Delete nodes startup cfg: Delete selected node's startup cfg. (clean default set)

10.3.2.4 Startup-configuration window





No configuration exports or manual configs loaded for nodes

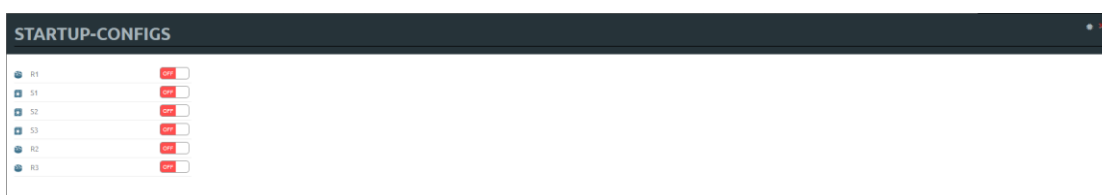

Startup-configs are exported and the "Configuration Export" feature can be used.




10.3.2.5 Startup-config window information

Config Set Default ▾	Config set menu
 R1	No configuration is available for node. Grey node
 R1	Configuration is available and can be used. Blue node. Exported configuration persist
 R2 OFF	Configuration persist but it is disabled. Node will boot from NVRAM or factory default if it is wiped
 R1 ON	Configuration persists and node will boot from the configuration after being wiped
P Cisco-IOS ▾ Dark ▾ 12px ▾ Ace Editor ON	Ace Editor. Different vendor configuration edit option. Just Text visual format.

10.3.3 Export configuration


Example:

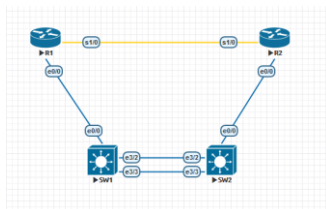

Step 1: **MANDATORY:** Configure your nodes and make sure you applied the vendor specific command to save the running configuration to NVRAM. If you do not save the configuration, it will not be exported and in the notification area, you will receive an error message stating the node cannot be exported.

In this example the nodes have been configured with hostnames only and the configurations have been saved to NVRAM.

Step 2: In the example below a group of nodes were selected to export configurations.

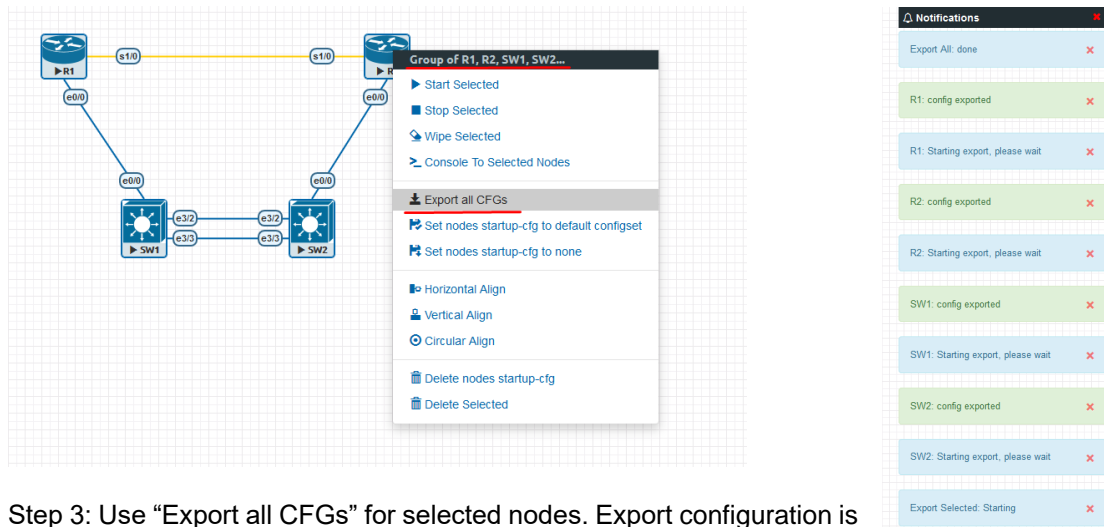

Step 3: Use “Export all CFGs” for selected nodes. Export configuration is completed. The notification area will display “Export All: done” when complete.

10.3.4 Boot nodes from exported config set

Step 1: Stop all nodes

Step 2: Open sidebar and click Startup-configs. Make sure your config is set to ON and the nodes config switch is green (switch on/off beside node). Press the green “Save” button (on the bottom) and all your nodes will boot with the exported config set after wiping them.




Step 3: Wipe nodes. For more information refer to section [8.1.3](#)

Step 4: Start nodes

10.3.5 Edit exported configurations

It is possible to edit your configurations for the nodes manually.

Step 1: Select the node you want to edit the configuration of and make your changes. Click “Save” when you are finished.

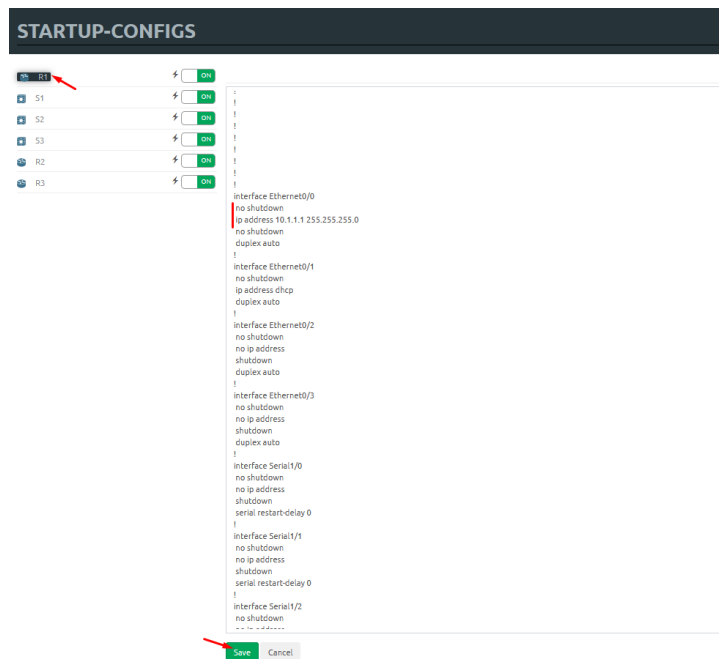

Step 2: Save the config for nodes with the green “Save” button on the bottom.

! NOTE: you can manually copy/paste any configuration into the config set editor and apply it to your node. Make sure your configuration interfaces match the lab node's interface names.

10.3.6 Set lab to boot from none

To reset your lab nodes' configuration to factory default, follow the steps below:

Step 1: Wipe nodes. Refer to section 10.3 for information about wiping nodes and the order of operations during boot.

Step 2: Open sidebar and click Startup-configs. Make sure your config is set to OFF and the nodes config switch is red (switch on/off beside node). Press the green “Save” button (on the bottom) and all your nodes will boot with no config/factory default after wiping them.




Step 3: Start nodes

10.3.7 Lab config script timeout

Lab config script timeout is used when nodes are waiting to boot from a config set. The node will literally wait during boot until the configuration is applied from the config set.

Hit “More actions” and then “Edit lab” from the sidebar. Set the config script timeout in seconds. By default, this timer is set to 300 seconds for new labs.

 NOTE: For heavy labs and nodes with long configurations, you can raise this timer to 600 seconds or higher.

Config Script Timeout

800

Seconds

11 EVE Troubleshooting

11.1 CLI diagnostic information display commands

11.1.1 Display full EVE Community diagnostic

```
eve-info
```

11.1.2 Display the currently installed EVE Community version:

```
dpkg -l eve-ng
```

```
root@eve-ng:~# dpkg -l eve-ng
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name          Version          Architecture Description
+++-+-----+-----+-----+-----+
ii  eve-ng          2.0.3-95         amd64        A new generation software for network
```

11.1.3 Display if EVEs Intel VT-x/EPT option on/off:

```
kvm-ok
```

```
root@eve-ng:~# kvm-ok
INFO: /dev/kvm exists
KVM acceleration can be used
root@eve-ng:~#
```

11.1.4 Display EVEs CPU INFO:

```
lscpu
```

```
root@eve-ng:~# lscpu
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                24
On-line CPU(s) list:   0-23
Thread(s) per core:    1
Core(s) per socket:    1
Socket(s):             24
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 44
Model name:            Intel(R) Xeon(R) CPU           X5680  @ 3.33GHz
Stepping:              2
CPU MHz:               3324.053
BogoMIPS:              6650.00
Virtualization:        VT-x
Hypervisor vendor:    VMware
```

11.1.5 Display EVEs HDD utilization.

If the /boot only has a little space left you can refer to section 3.6.1.1. If the eve-ng—vg—root reaches 99% or 100% then you will need to expand the HDD in order to continue using EVE. The Solution to expand your HDD is described in section 11.1

```
df -h
```

```
root@eve-ng:~# df -h
Filesystem      Size  Used Avail Use% Mounted on
udev            40G   0    40G   0% /dev
tmpfs           7.9G  52M   7.9G   1% /run
/dev/mapper/eve--ng--vg-root 681G  370G  283G  57% /
tmpfs           40G   0    40G   0% /dev/shm
tmpfs           5.0M   0   5.0M   0% /run/lock
tmpfs           40G   0    40G   0% /sys/fs/cgroup
/dev/sda1       472M   83M  365M  19% /boot
root@eve-ng:~#
```

11.1.6 Display EVEs Bridge interface status

brctl show

```
root@eve-ng:~# brctl show
bridge name      bridge id      STP enabled    interfaces
docker0          8000.0242c0db8435  no             nat0
nat0             8000.000000000000  no             pnet0
pnet0            8000.000c29d0aa94  no             pnet1
pnet1            8000.000c29d0aabc  no             vun11_0_1_0
pnet2            8000.000c29d0aa9e  no             eth2
pnet3            8000.000c29d0aaa8  no             eth3
pnet4            8000.000c29d0aab2  no             eth4
pnet5            8000.000000000000  no
pnet6            8000.000000000000  no
pnet7            8000.000000000000  no
pnet8            8000.000000000000  no
pnet9            8000.000000000000  no
```

11.1.7 Display EVEs system services status

systemctl list-unit-files --state=enabled

```
root@eve-ng:~# systemctl list-unit-files --state=enabled
UNIT FILE                                STATE
accounts-daemon.service                 enabled
autovt@.service                         enabled
capdog.service                          enabled
cpulimit.service                        enabled
cron.service                            enabled
docker.service                          enabled
getty@.service                           enabled
lvm2-monitor.service                    enabled
mysql.service                           enabled
networking.service                      enabled
open-vm-tools.service                   enabled
openvswitch-switch.service              enabled
ovfstartup.service                      enabled
resolvconf.service                      enabled
rsyslog.service                         enabled
ssh.service                             enabled
sshd.service                            enabled
syslog.service                          enabled
systemd-timesyncd.service                enabled
unattended-upgrades.service              enabled
ureadahead.service                      enabled
dm-event.socket                         enabled
docker.socket                           enabled
lvm2-lvmetad.socket                     enabled
lvm2-lvmpolld.socket                    enabled
uidd.socket                             enabled
remote-fs.target                        enabled
apt-daily-upgrade.timer                  enabled
apt-daily.timer                          enabled
```

11.2 Expand EVEs System HDD

⚠ IMPORTANT NOTE: DO NOT expand your current/existing HDD on your EVE VM!

11.2.1 Expand HDD on VMware Workstation

Expanding your EVEs system HDD is achieved by adding an additional HDD to your EVE VM.

Step 1: Stop all your labs and shutdown EVE.

Use EVE CLI command: **shutdown -h now**

Step 2: Go to edit VM settings and add a new Hard drive. Then click Next.

Step 3: Leave the recommended SCSI HDD option and then click Next


Step 4: Make sure you have selected the option “Create a new Virtual disk.”

Step 5: Set your desirable HDD Size; example 200GB.

Step 6: Make sure you have set the option “Store Virtual disk as a single file” and then click Next

Step 7: Optional: Specify the location of where your new HDD will be stored, then click Finish.

Step 8: Boot your EVE VM, HDD size will be expanded automatically. To verify, use the command to verify HDD utilization referenced in section **11.1.5**

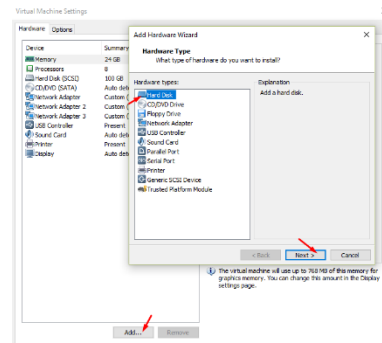

11.2.2 Expand your HDD on ESXi

Expanding your EVEs system HDD is achieved by adding an additional HDD to your EVE VM.


Step 1: Stop all your labs and shutdown EVE.

Use EVE CLI command: **shutdown -h now**

Step 2: Go to edit VM settings and add a new Hard drive. Then click Next

Step 3: Make sure you have selected the option “Create a new Virtual disk.” Then click Next

Step 4: Set your desirable HDD Size; example 200GB.

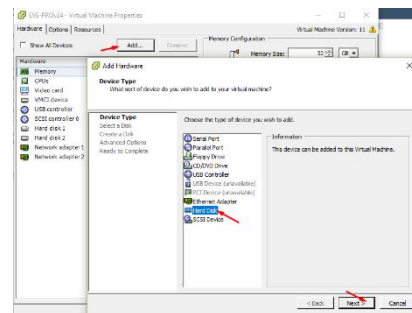

Step 5: It is recommended to set the **Thick Provision Lazy Zeroed** HDD option.

Step 6: Specify the location of where your new HDD will be stored and then click Next

Step 7: Leave the recommended SCSI HDD option as is and click Finish.

Step 8: Boot your EVE VM, the HDD size will be expanded automatically. To verify, use the command to verify HDD utilization referenced in section **11.1.5**

11.2.3 Expand your HDD on a Bare Metal EVE Server

It is a complicated process to expand a HDD for a bare metal EVE server. Please open a ticket in our Live chat support for advice.

<http://www.eve-ng.net/live-helpdesk>

Use a google account to join in the Live Chat or create new chat account.

11.3 Reset Management IP

Type the following commands into the CLI followed by enter:

```
rm -f /opt/ovf/.configured
```

```
su -
```

<http://www.eve-ng.net/documentation/installation/bare-install> IP address setup wizard. Please follow the steps in section 3.5.1 for Static IP or 3.5.2 for DHCP IP setup.


11.4 EVE Community SQL Database recovery

Starting from EVE Community version 2.0.3-95, you can recover SQL user database in case of disaster:


```
unl_wrapper -a restoredb
```

11.5 EVE Log files

EVE log Files can be obtained from the System Logs page under the System dropdown menu



Use the menu to collect log file data you are interested in.

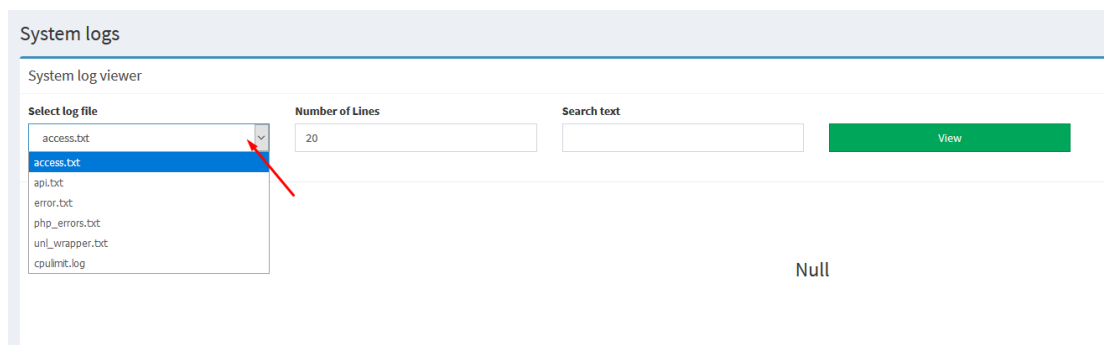

11.6 EVE cli diagnostic info

Use EVE cli to obtain your EVE information:

```
eve-info
```

12 Images for EVE

Images must be uploaded and prepared before they can be used in labs. The best way to upload images is to use the WinSCP tool for Windows environment or FileZilla for MAC OSX and Linux.

Link to download WinSCP:

<https://winscp.net/eng/download.php>

Link to download FileZilla:

<https://filezilla-project.org/>

To access EVE, use SSH protocol (port 22).

Supported images for EVE are stored in the three locations:

- IOL (IOS on Linux), **/opt/unetlab/addons/iol/bin/**
- Dynamips images, **/opt/unetlab/addons/dynamips**
- Qemu images, **/opt/unetlab/addons/qemu**

12.1 Qemu image naming table

⚠ IMPORTANT NOTE: Intel VT-X/EPT must be enabled to run Qemu nodes in EVE. For information on how to enable this option, Refer to section 3: EVE Installation.

The directory names used for QEMU images are very sensitive and must match the table below exactly in order to work.

Ensure your image folder name starts as per the table. After the "-" you can add whatever you like to label the image. We recommend using the version of your image.

Folder name examples:

`firepower6-FTD-6.2.1`
`acs-5.8.1.4`

The image hdd inside the folder must be named correctly:

Example: `hda.qcow2` or `virtioa.qcow2`

Full path Example: `opt/unetlab/addons/qemu/acs-5.8.1.4/hda.qcow2`

The table of proper folder names is provided in our website:

<https://www.eve-ng.net/index.php/documentation/qemu-image-namings/>

Supported HDD formats for the EVE images:

<code>lsi([a-z]+).qcow</code>	<code>lsi.qcow</code>
<code>hd([a-z]+).qcow</code>	<code>hda.qcow</code>
<code>virtide([a-z]+).qcow</code>	<code>virtidea.qcow</code>
<code>virtio([a-z]+).qcow</code>	<code>virtioa.qcow</code>

scsi([a-z]+).qcow	scsia.qcow
sata([a-z]+).qcow	sataa.qcow

12.2 How to prepare images for EVE

How to add EVE-NG images please refer to:

<https://www.eve-ng.net/index.php/documentation/howtos/>

12.3 How to add custom image template

12.3.1 Templates folder choice

! IMPORTANT NOTE: Starting from EVE-Community Version 2.0.3-107, EVE installation is autodetecting what kind of CPU manufacturer has your server: Intel or AMD, to choose proper templates set. You can check it manually on EVE cli: example below, showing that EVE has Intel CPU.

```
root@eve-ng:~# lsmode | grep ^kvm_
kvm_intel          212992  74
root@eve-ng:~#
```

- If you have Intel CPU, then your template files are in **"`/opt/unetlab/html/templates/intel/`"**
- If you have AMD CPU, then your template files are in **"`/opt/unetlab/html/templates/amd/`"**


12.3.2 Prepare template file

! NOTE: For templates development use templates folder which is matching your EVE server CPU manufacturer.

Example below will be based for Intel CPU EVE custom image template. Use EVE cli or WinSCP/Filezilla to create template.

Step 1: Navigate to EVE location: **`/opt/unetlab/html/templates/intel/`**

Step 2: Choose your most suitable template from which you want to create your own image template. (example: newimage.yml)

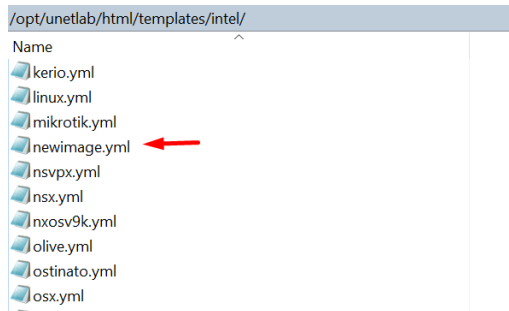

Step 3: Make a copy from source template newimage.yml. Example: Using CLI create template and name it gips.yml.

```
cp /opt/unetlab/html/templates/intel/newimage.yml /opt/unetlab/html/templates/intel/ngips.yml
```

You can create new template using WinSCP or Filezilla as well.

```
root@eve-ng:~# cp /opt/unetlab/html/templates/intel/newimage.yml /opt/unetlab/html/templates/intel/ngips.yml
root@eve-ng:~# cd /opt/unetlab/html/templates/intel/ls
root@eve-ng:~# cd /opt/unetlab/html/templates/intel/ls
a10.yml c7200.yml cumulus.yml isis.yml ios.yml osx.yml sterra.yml versadir.yml vtedge.yml
acs.yml c9800cl.yml cup.yml ise.yml paloalto.yml timoscpm.yml versaifvni.yml vtmgmt.yml
alteon.yml cda.yml cyberoam.yml jspace.yml pfsense.yml timosiom.yml vti2.yml vti2mart.yml
ampcloud.yml cexpresw.yml dcnm.yml junipervrr.yml phoebe.yml timos.yml vios.yml vwaas.yml
apicem.yml cips.yml docker.yml kerio.yml prime.yml titanium.yml vmxvcp.yml vwlc.yml
arubacx.yml clearpass.yml esxi.yml linux.yml pulse.yml trendmivtps.yml vmxvfp.yml vvos.yml
aruba.yml cms.yml extremexos.yml mikrotik.yml riverbed.yml uccx.yml vmx.yml winserver.yml
asav.yml coeus.yml firepower6.yml newimage.yml scrutinizer.yml ucspe.yml vnam.yml win.yml
asa.yml cpsg.yml firepower.yml ngips.yml silveredge.yml pivcenter.yml vpcv.yml vpcv9k.yml
barracuda.yml csr1000vng.yml fortinet.yml nsvpix.yml silverorch.yml veloedge.yml vqfxpfe.yml xrv.yml
bigip.yml csr1000v.yml hpvpr.yml nex.yml sonicwall.yml velogw.yml vqfxre.yml *.yml
brocadevadx.yml ctxsdw.yml huaweiark.yml nxosv9k.yml sophosutm.yml veloorch.yml vxrnxg.yml
c1710.yml cucm.yml huaweiusg6kv.yml olive.yml sophosxg.yml veos.yml vxrx.yml
c3725.yml cue.yml infoblox.yml ostinato.yml stealth.yml versaana.yml vtbond.yml
root@eve-ng:/opt/unetlab/html/templates/intel#
```

IMPORTANT: The new name of your template will be related to your image foldername. Your image foldername must start with prefix “ngips-”

Example: image foldername under /opt/unetlab/addons/qemu/**ngips-6.5.0-115**

```
root@eve-ng:~# cd /opt/unetlab/addons/qemu/
root@eve-ng:/opt/unetlab/addons/qemu# ls
a10-vThunder-4.1.4 1 KB in 0 of 13
ampcloud-2.3.5-L
ampcloud-3.0.2
arubacx-10.03
arubacx-10.04-1000
aruba-VMC 8.4.0.3
asa-915-16-k8-CL-L
asav-9131-100
asav-971-001
ise-2.6.0.156.SPA-L
junipervrr-19.2R1-S2.2
kerio-control-9.3.2
linux-mint-18.3-cinnamon-64bit
linux-slax-64bit-9.3.0
linux-slax-64bit-9.3.0.tar.gz
mikrotik-6.44.5
ngips-6.5.0-115
nsvpix-12.0.53.13
```

12.3.3 Prepare interface format and name lines

EVE Community has included option to create various interface names, sequences and numbering. Please refer table below.

Formula	Template line format example	Will produce
eth_format: <prefix>{<first value for slot: example 1>}<separator>{<first value for port>-<number of port per slot: example 8>}	eth_format: Gi{1}/{0-8}	Gi1/0 Gi1/1 Gi1/2 Gi1/3 Gi1/4 Gi1/5 Gi1/6 Gi1/7 Gi2/0 Gi2/1
eth_format: <prefix>{<first value for slot: example 0>}<separator>{<first value for port>-<number of port per slot: example 4>}	eth_format: Ge{0}/{0-4}	Ge0/0 Ge0/1 Ge0/2 Ge0/3 Ge1/0 Ge1/2 Ge1/3 Ge2/0 Ge2/1 Ge2/2


	
eth_format: <prefix>{<first value>}	eth_format: Gi{0}	Gi0 Gi1 Gi2 Gi3 ...
eth_format: <prefix>{<first value>}	eth_format: G0/{0}	G0/0 G0/1 G0/2 G0/3 ...
eth_name: <prefix: Interface custom name>	eth_name: - M1 - T1 - T2	M1 T1 T2
eth_name: <prefix: Interface custom name>	eth_name: - MGMT - DATA - TRAFFIC	MGMT DATA TRAFFIC

Combined first named interface following by formatted interfaces Example: We have to set first node interface name “eth0/mgmt” and next following interfaces must start from eth1 and change sequence accordingly. eth1, eth2,...,ethx

As your node first interface will be custom named (eth0/mgmt), therefore in the template “eth_name:” must be added before “eth_format:”

```
eth_name:
- eth0/mgmt
eth_format: eth{1}
```

This adding will produce Node interfaces.

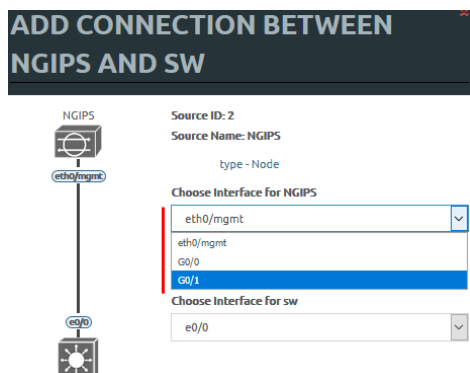

12.3.4 Edit your new template file:

For edit newly created template you can use WinSCP, FileZilla or cli. Example below shows template edit using cli and *nano* editor

```
cd /opt/unetlab/html/templates/intel/
nano ngips.yml
```

Change content, setting for various images can vary depends of vendor requirements. The interface name lines please refer Section: [12.3.1](#)

```
# Copyright (c) 2016, Andrea Dainese
# Copyright (c) 2018, Alain Degreffe
# All rights reserved.
#
# Redistribution and use in source and binary forms, with or without
# modification, are permitted provided that the following conditions are met:
#   * Redistributions of source code must retain the above copyright
#     notice, this list of conditions and the following disclaimer.
#   * Redistributions in binary form must reproduce the above copyright
#     notice, this list of conditions and the following disclaimer in the
#     documentation and/or other materials provided with the distribution.
#   * Neither the name of the UNetLab Ltd nor the name of EVE-NG Ltd nor the
#     names of its contributors may be used to endorse or promote products
#     derived from this software without specific prior written permission.
#
# THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND
# ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
# WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
# DISCLAIMED. IN NO EVENT SHALL <COPYRIGHT HOLDER> BE LIABLE FOR ANY
# DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
# (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
# LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND
# ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
# (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
# SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
---
```

```
type: qemu
name: NGIPS
description: Cisco FirePower NGIPS
cpulimit: 1
icon: IPS.png
cpu: 4
ram: 8192
ethernet: 3
eth_name:
- eth0/mgmt
eth_format: eth{1}
console: vnc
shutdown: 1
qemu_arch: x86_64
qemu_version: 2.4.0
qemu_nic: e1000
qemu_options: -machine type=pc,accel=kvm -serial none -nographic -no-user-config
               -nodefaults -display none -vga std -rtc base=utc -cpu host
...
```



Node name on the Topology

Node list name

Note: Qemu options in the line may vary per image requirements. Please check manufacturer advice how to run KVM image

12.3.5 Prepare new icon for your template:

Step 1 Use Filezilla or Winscp to copy your custom icon IPS.png (icon filename IPS.png used in ngips.yml)

This icon should be about 30-60 x 30-60 in the png format (switch.png is for example 65 x 33, 8-bit/color RGBA)

Step 2 Copy this new icon into /opt/unetlab/html/images/icons/

12.3.6 Template use

Step 1 Create directory /opt/unetlab/addons/qemu/ngips-6.2.83

```
mkdir /opt/unetlab/addons/qemu/ngips-6.2.83
```

Step 4.2 Upload image NGIPS, Refer Section: [□](#)

12.4 How to hide unused images in the node list

12.4.1 Creating new config.php file

If your EVE Server does not have the **config.php** file in the **/opt/unetlab/html/includes/** directory, then it must be created.

Step 1. Use the EVE CLI. Make sure you are in the following EVE directory:
/opt/unetlab/html/includes/

Step 2. Rename config.php.distributed (the template) to config.php.

```
mv config.php.distribution config.php
```

12.4.2 Edit config.php file

Step 1. Use vi or nano file editor to edit your config.php file.

```
nano config.php
```

Step 2. Edit the config.php file, uncomment and adjust to your TEMPLATE_DISABLED settings (see screenshot below).


“hided” will remove unloaded/empty image templates from nodes list in WEB GUI

“missed” will show you all available templates in EVE WEB nodes list

Example below will give you result:

```
<?php
// TEMPLATE MODE .missing or .hided
DEFINE('TEMPLATE_DISABLED', '.hided') ;
?>
```

You are seeing only templates with loaded images.

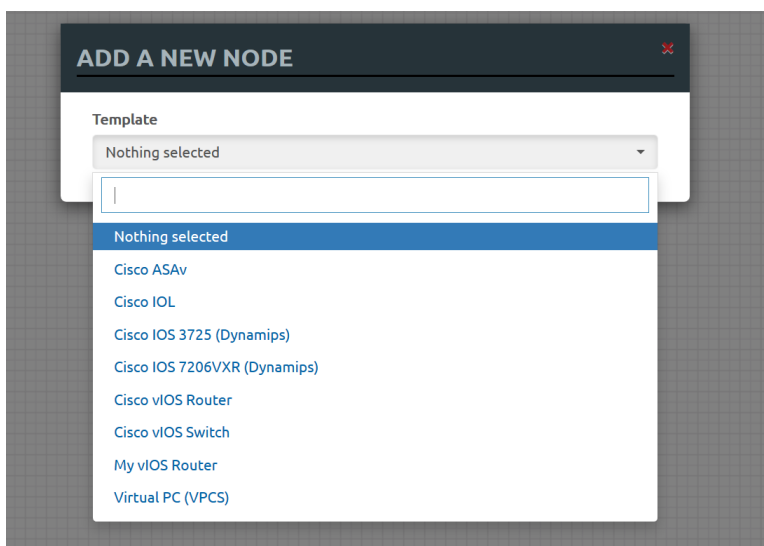

13 EVE Resources

For additional updated information please follow our web site: <https://www.eve-ng.net>

How to updates: <https://www.eve-ng.net/index.php/documentation/howtos/>

How to videos: <https://www.eve-ng.net/index.php/documentation/howtos-video/>

FAQ: <https://www.eve-ng.net/index.php/faq/>

Live support chat: <https://www.eve-ng.net/index.php/live-helpdesk/>

For access to live chat use your Google account or create new chat account.

EVE forum: <https://www.eve-ng.net/forum/>

To access forum resources, please create a new forum account.

EVE YouTube channel:

<https://www.youtube.com/playlist?list=PLF8yvsYkPZQ0myW7aVMZ80k8FU04UUgjV>

EVE Professional downloads: <https://www.eve-ng.net/index.php/download/>

EVE Community version downloads, free: <https://www.eve-ng.net/index.php/community/>

EVE Supported images: <https://www.eve-ng.net/index.php/documentation/supported-images/>