Emulated Virtual Environment
Next Generation

EVE-NG Professional Cookbook

Version 4.14

Author:
Uldis Dzerkals

Editors:
Michael Doe
Christopher Lim

© EVE-NG LTD

The information contained in this document is the property of EVE-NG Limited

The contents of the document must not be reproduced or disclosed wholly or in part or used for purposes other than that for which it is supplied without the prior written permission of EVE-NG Limited.

Table of Contents

PREFACE **9**

1 INTRODUCTION **10**

1.1 WHAT IS EVE-NG? 10
1.2 WHAT IS EVE-NG USED FOR? 10
1.3 WHO IS EVE-NG FOR? 10

2 SYSTEM REQUIREMENTS **11**

2.1 HARDWARE REQUIREMENTS 11
2.1.1 Minimal Laptop/PC Desktop system requirements 11
2.1.2 Recommended Laptop/PC Desktop system requirements 12
2.1.3 Virtual Server system requirements 12
2.1.4 Dedicated Server (bare) system requirements 13
2.1.5 Nodes per lab calculator 13
2.1.6 Hardcoded Subnets in the EVE 13
2.2 SUPPORTED VIRTUALIZATION PLATFORMS AND SOFTWARE 13
2.3 UNSUPPORTED HARDWARE AND SYSTEMS 14

3 INSTALLATION **15**

3.1 VMWARE WORKSTATION OR VM PLAYER 15
3.1.1 VMware workstation EVE VM installation using ISO image (preferred) 15
3.1.1.1 EVE VM Setup and Settings 15
3.1.1.2 EVE-NG VM Installation steps 18
3.1.2 VMware workstation OVF deployment 23
3.1.2.1 Deployment and VM machine settings 24
3.1.2.2 OVF VM update to the latest EVE version 25
3.1.2.3 OVF VM HDD Size expansion 26
3.2 VMWARE ESXI 26
3.2.1 VMware ESXi EVE installation using ISO image (preferred) 26
3.2.1.1 EVE-NG ESXi VM Setup and Settings 26
3.2.1.2 EVE-NG ESXi VM Installation steps 28
3.2.2 VMware ESXi OVF deployment 33
3.2.2.1 ESXi OVF VM Setup and Settings 33
3.2.2.2 ESXi OVF VM update to the latest EVE version 35
3.2.2.3 ESXi OVF VM HDD Size expansion 35
3.3 BARE HARDWARE SERVER EVE INSTALLATION 35
3.3.1 Ubuntu Server Installation Phase 1 35
3.3.2 EVE Professional Installation Phase 2 40
3.4 GOOGLE CLOUD PLATFORM 42
3.4.1 Google account 42
3.4.2 Goggle Cloud project 42
3.4.3 Preparing Ubuntu boot disk template 44
3.4.4 Creating VM 45
3.4.5 EVE-NG-PRO installation 47
3.4.6 Access to Google Cloud EVE-PRO 49
3.4.7 Optional: GCP Firewall rules for native console use 49
3.5 EVE MANAGEMENT IP ADDRESS SETUP 52
3.5.1 Management static IP address setup (preferred) 52
3.5.2 EVE Management IP address setup via DHCP 55
3.5.3 Internet proxy setup 57
3.5.4 EVE Management IP address reset 58
3.6 NATIVE TELNET CONSOLE MANAGEMENT SETUP 58
3.6.1 Windows Native Console 58
3.6.2 Linux Native Console 59
3.6.3 MAC OSX Native Console 60

© EVE-NG LTD

3.7 LOGIN TO THE EVE WEB GUI 60

4 EVE-NG PROFESSIONAL LICENSING 61

4.1 EVE-NG PROFESSIONAL BASE LICENSE 61
4.2 EVE-NG LEARNING CENTRE LICENSES 62
4.3 EVE-NG CORPORATE LICENSES 63
4.4 USER ROLES COMPARISON CHART 64
4.5 LICENSE PURCHASING AND ACTIVATION 65
4.6 LICENSE DEACTIVATION 67
4.7 LICENSE REHOSTING. 68

5 EVE-NG PROFESSIONAL UPDATE & UPGRADE 69

5.1 EVE-NG PROFESSIONAL UPDATE 69
5.2 EVE-NG PROFESSIONAL UPGRADE 70

6 TYPES OF EVE MANAGEMENT CONSOLES 72

6.1 NATIVE CONSOLE 72
6.1.1 Native Console: telnet 72
6.1.2 Native Console: Wireshark 73
6.1.3 Native Console: VNC 74
6.1.4 Native Console: RDP 75
6.2 HTML5 CONSOLE 76
6.2.1 HTML5 Console window functions 76
6.2.2 HTML5 Console: Telnet 76
6.2.3 HTML5 Console: Wireshark 77
6.2.4 HTML5 Console: VNC 78
6.2.5 HTML5 Console: RDP 79
6.3 HTML5 DESKTOP CONSOLE 81
6.3.1 Login to HTML5 Desktop console 81
6.3.2 HTML5 Desktop Console: telnet 82
6.3.3 HTML5 Desktop Console: Wireshark 82
6.3.4 HTML5 Desktop Console: RDP 83
6.3.5 HTML5 Desktop Console: ThinClient Files exchange 83

7 EVE WEB GUI MANAGEMENT 84

7.1 EVE MANAGEMENT PAGE 84
7.1.1 Management buttons 84
7.1.2 Management tabs 85
7.2 FOLDERS AND LAB FILES MANAGEMENT 86
7.2.1 Folders Management 86
7.2.1.1 Default folder Running 86
7.2.1.2 Default folder Shared 87
7.2.1.3 Default folder Users 88
7.2.1.4 Create folder 88
7.2.1.5 Delete folder 88
7.2.1.6 Move Folder 89
7.2.1.7 Export Folder 89
7.2.1.8 Import Folder 89
7.2.2 Lab files Management 90
7.2.2.1 Create Lab 91
7.2.2.2 Delete Lab 91
7.2.2.3 Clone Lab 91
7.2.2.4 Move Lab 92
7.2.2.5 Export Lab 93
7.2.2.6 Import Labs 93
7.3 EVE MANAGEMENT DROPDOWN MENU 94
7.3.1 EVE User management 94
7.3.1.1 Creating a new EVE User 94
7.3.1.2 Edit EVE User 98

© EVE-NG LTD

7.3.1.3 User session termination 99
7.3.1.4 User monitoring 100
7.3.1.5 User role sticky lab 100
7.3.2 EVE Node management 101
7.3.2.1 Node management actions 101
7.3.2.2 Node management filtering function 101
7.3.3 EVE Lab management 102
7.3.3.1 Lab management actions 103
7.4 EVE SYSTEM DROPDOWN MENU 103
7.4.1 System Settings 104
7.4.2 Cluster Management 106
7.4.3 System status 106
7.4.4 System logs 107
7.4.5 Stop All Nodes 107
7.5 EVE INFORMATION DROPDOWN MENU 108
7.6 EVE LICENSING DROPDOWN MENU 108
7.7 OTHER TAB LINE INFO 108
7.8 LAB PREVIEW AND GLOBAL SETTINGS 108
7.8.1 Lab preview window 109
7.8.2 Lab preview buttons 109
7.8.3 Lab preview information 110
7.8.4 Lab Global Settings 110
8 EVE WEB TOPOLOGY PAGE 112
8.1 SIDE BAR FUNCTIONS 112
8.1.1 Add an object 112
8.1.1.1 Node object 113
8.1.1.2 Network object 113
8.1.1.3 Picture object 114
8.1.1.4 Custom shape object 114
8.1.1.5 Text object 115
8.1.1.6 Line object 115
8.1.2 Nodes 115
8.1.3 Networks 117
8.1.4 Startup-configs 117
8.1.5 Logical Maps 118
8.1.6 Configured Objects 118
8.1.7 More actions 118
8.1.7.1 Start all nodes 119
8.1.7.2 Stop all nodes 119
8.1.7.3 Wipe all nodes 119
8.1.7.4 Console to All Nodes 120
8.1.7.5 Export all CFGs 120
8.1.7.6 Edit lab 120
8.1.7.7 Topology screenshot 120
8.1.7.8 Set node's startup-cfg to default configset 120
8.1.7.9 Set node's startup-cfg to none 121
8.1.7.10 Delete default startup-cfgs 121
8.1.8 Refresh Topology 121
8.1.9 Lab page zoom/unzoom 121
8.1.10 Status 121
8.1.11 Lab details 122
8.1.12 Lab Tasks 122
8.1.13 Lab Chat 122
8.1.14 Lock Lab with password 122
8.1.15 Fullscreen 123
8.1.16 Hide interface labels 123
8.1.17 Dark mode or Light mode 123
8.1.18 Close lab 124

© EVE-NG LTD

8.1.19 Logout 124
8.2 EVE LAB TOPOLOGY MENUS 124
8.2.1 Lab topology menu 124
8.2.2 Connection menu 124
8.2.3 Cloud or Bridge network menu 124
8.2.4 Stopped node menu 125
8.2.5 Running node menu 126
8.2.6 Selected nodes menu and features 127
8.3 EVE LAB NODE STATES AND SYMBOLS 130
8.3.1 Stopped (non-running) nodes 130
8.3.2 Running nodes 130
8.3.3 Node connector symbol 131
8.4 OTHER 131
8.4.1 Notifications area 131

9 WORKING WITH EVE LABS 133

9.1 CREATING A LAB 133
9.1.1 Adding nodes to the lab 133
9.1.1.1 Node values Table 135
9.1.2 Edit node 138
9.1.2.1 Edit nodes globally 138
9.1.2.2 Edit node individually. 138
9.1.3 Wipe Node 139
9.1.4 Interconnecting nodes 139
9.1.5 Edit connection link style 140
9.1.6 Edit connection link quality 141
9.1.7 Suspend or resume link connection 142
9.1.8 Delete connection between nodes 143
9.1.9 Delete Node 144
9.2 RUNNING LABS 144
9.2.1 Starting lab 144
9.2.2 Interconnecting running nodes (hotlinks) 145
9.2.3 Link quality delay, packet loss, jitter and rate feature 145
9.3 SAVING LABS 145
9.4 STOPPING LABS 145
9.5 START SAVED LAB 146
9.6 WORKING WITH MULTIPLE RUNNING LABS 146
9.7 IMPORTING LABS 146
9.8 EXPORTING LABS 146
9.9 DELETING LABS 146
9.10 MOVING LABS 146
9.11 SHARED LAB 146
9.11.1 Create Lab share 147
9.11.2 Remove Lab share 147
9.11.3 Working with shared lab 148
9.12 STICKY LAB 149

10 EVE CLOUDS AND NETWORKS 150

10.1 BRIDGE NETWORK 150
10.2 INTERNAL NETWORK 151
10.3 PRIVATE NETWORK 151
10.4 NAT NETWORK 152
10.5 MANAGEMENT CLOUD0 INTERFACE 153
10.6 REMOVE CLOUD INTERFACES 156
10.7 OTHER CLOUD INTERFACES 156
10.8 CONNECTING EXTERNAL VM MACHINES TO THE EVE LAB 157
10.8.1 ESXi VM machines 157
10.8.2 VMWare workstation machines 159

© EVE-NG LTD

10.9 CONNECTING EVE LAB TO A PHYSICAL DEVICE 161
10.9.1 ESXi EVE 161
10.9.2 VMWare workstation EVE 163
10.9.3 Bare metal server EVE 165

11 ADVANCED EVE LAB FEATURES 167

11.1 LAB DESIGN OBJECTS 167
11.1.1 Custom shape 167
11.1.2 Resize square or circle objects 168
11.1.3 Text 168
11.1.4 Add picture to the topology 169
11.1.5 Custom object linking with telnet or other protocol 170
11.1.6 Line object 172
11.1.7 Nodes connection links design 173
11.1.8 Cloning objects and overlay positions 173
11.1.9 Objects Editing 173
11.1.10 Lock objects movement 174
11.2 CUSTOM DESIGN LOGICAL TOPOLOGY 174
11.2.1 Custom design upload 174
11.2.2 Custom topology mapping 175
11.2.3 Delete topology or mapping 176
11.3 MULTI-CONFIGURATION SETS EXPORT FEATURE 176
11.3.1 Supported nodes for configuration exports 177
11.3.2 Startup config management 178
11.3.2.1 Global commands 178
11.3.2.2 Individual node commands 178
11.3.2.3 Multiple selected nodes commands 179
11.3.2.4 Startup-configuration window 179
11.3.2.5 Startup-config window information 179
11.3.3 Export Default configuration set 181
11.3.4 Boot nodes from exported Default config set 182
11.3.5 Export new custom config set 182
11.3.6 Edit exported configurations 183
11.3.7 Set lab to boot from config set 184
11.3.8 Set lab to boot from none 184
11.3.9 Delete a config set 185
11.3.10 Rename a config set 185
11.3.11 Export a config set to your local PC 185
11.3.12 Import config set from local PC. 185
11.3.13 Export a single nodes config to your local PC 186
11.3.14 Import a single nodes config from your local PC 186
11.3.15 Set lab nodes to boot from different config sets 186
11.3.16 Lab config script timeout 187
11.4 LAB TIMER 187
11.4.1 Set the Lab Countdown Timer 187
11.4.2 Stop the Lab Countdown Timer 188
11.5 LAB TASKS 188
11.5.1 Creating a new simple task 188
11.5.2 Edit a simple task 188
11.5.3 Create a multi tabs task (task on multiple tabs/pages) 189
11.5.4 Edit a multi tabs task (task on multiple tabs/pages) 189
11.5.5 Edit tabs (Multi tabbed task). 190
11.5.6 Create a task with your PDF workbook 191
11.5.7 Create a task with Online document (PDF or HTML) 193
11.5.8 Delete a task 194

12 WIRESHARK CAPTURE 195

12.1 NATIVE CONSOLE WIRESHARK CAPTURING 195
12.2 HTML5 CONSOLE WIRESHARK CAPTURING 196

© EVE-NG LTD

12.3 HTML5 Desktop Console Wireshark capturing 199

13 THINCLIENT FILE EXCHANGE 201

13.1 Thinclient files downloading 201
13.2 Thinclient File upload 202
13.3 Other Thinclient file operations 204

14 DOCKERS 207

14.1 EVE integrated docker stations 207
14.1.1 Docker Machines 207
14.1.2 Docker DHCP IP address setup 209
14.1.3 Docker Static IP and MAC address setup 210
14.1.4 Docker multi interfaces setup 211
14.1.5 Docker server-gui custom WEB page 212
14.1.6 Docker server-gui SSL WEB page 214
14.2 Docker Consoles 215
14.3 Docker cli root access 215
14.4 Dockers re-install/update 216
14.5 Extra docker packages 216
14.6 Third parties dockers 217
14.6.1 Simple docker installation 217
14.6.2 Docker stack installation 218
14.7 Customize docker image with your own changes. 220
14.8 Delete docker image from EVE 221

15 EVE CLUSTER SYSTEM 223

15.1 EVE Cluster design models 223
15.1.1 Bare metal servers cluster 223
15.1.2 ESXi Virtual Machines cluster 223
15.1.3 Hybrid cluster 224
15.1.4 VM Ware workstation light cluster 224
15.1.5 Google Cloud cluster 224
15.2 EVE Cluster pre-requisites 225
15.2.1 Firewall rules between Master and Satellite nodes 225
15.2.2 EVE Cluster internal management network 225
15.2.3 EVE Cluster Member's hardware requirements 225
15.3 EVE Cluster MASTER Node Installation 225
15.4 ESXi EVE Satellite VM installation 225
15.4.1 EVE-NG Satellite ESXi VM Setup and Settings 226
15.4.2 EVE-NG Satellite ESXi VM Installation steps 228
15.5 Bare metal server EVE Satellite installation 233
15.5.1 Ubuntu Server Installation Phase 1 233
15.5.2 EVE Satellite Installation Phase 2 238
15.6 Google Cloud EVE Satellite installation 238
15.6.1 Preparing Ubuntu boot disk template 238
15.6.2 Creating VM 239
15.6.3 EVE GCP Satellite installation 242
15.6.4 GCP Firewall rules for Cluster 244
15.7 Cluster Management 245
15.7.1 Join Satellite nodes to the Master 245
15.7.2 Remove Satellite nodes from the Master 246
15.7.3 Re-join Satellite nodes from the Master 246
15.8 Cluster assignment hierarchy 246
15.8.1 User assignment to the dedicated Satellite (Option 1) 247
15.8.2 Lab assignment to dedicated cluster Satellite (Option 2) 248
15.8.3 Creating EVE labs in Cluster (Option 3) 249
15.8.4 Master images synchronization with Satellites 249
15.9 Cluster system monitoring 250

© EVE-NG LTD

15.9.1 Cluster Monitoring page ... 250
15.9.2 Satellite disaster recovery ... 250
15.9.3 EVE Cluster Status ... 251
15.9.4 Cluster monitoring cli commands ... 251
15.10 CLUSTER SYSTEM UPGRADE ... 252

16 EVE TROUBLESHOOTING ... 254

16.1 CLI DIAGNOSTIC INFORMATION DISPLAY COMMANDS ... 254
16.1.1 Display full EVE Pro diagnostic ... 254
16.1.2 Display the currently installed EVE Pro version: ... 254
16.1.3 Display if EVEs Intel VT-x/EPT option on/off: ... 254
16.1.4 Display EVEs CPU INFO: ... 254
16.1.5 Display EVEs CPU manufacturer: ... 254
16.1.6 Display EVEs HDD utilization. ... 255
16.1.7 Display EVEs Bridge interface status ... 255
16.1.8 Display EVEs system services status ... 255
16.2 EXPAND EVES SYSTEM HDD ... 255
16.2.1 HDD space alert ... 256
16.2.2 Expand HDD on VMware Workstation ... 256
16.2.3 Expand your HDD on ESXi ... 257
16.2.4 Expand your HDD on a Bare Metal EVE Server ... 257
16.3 RESET MANAGEMENT IP ... 257
16.4 EVE PRO SQL DATABASE RECOVERY ... 257
16.5 EVE PRO MIGRATION FROM HOST TO HOST ... 258
16.6 EVE LOG FILES ... 258
16.7 EVE CLI DIAGNOSTIC INFO ... 258

17 EVE EXTRAS ... 260

17.1 EVE PRO RADIUS SERVER SETUP FOR USER AUTHENTICATION ... 260
17.1.1 EVE User setup for Radius authentication ... 260
17.2 ACTIVE DIRECTORY USER AUTHENTICATION ... 261
17.2.1 EVE User setup for AD (LDAP) authentication ... 262
17.3 LAB CHAT ... 263
17.4 CUSTOM MAC ADDRESS FOR NODE MANAGEMENT ... 263
17.5 WINDOWS NODE SETTINGS FOR WIFI DONGLE ... 264

18 IMAGES FOR EVE ... 267

18.1 QEMU IMAGE NAMING TABLE ... 267
18.2 HOW TO PREPARE IMAGES FOR EVE ... 268
18.3 HOW TO ADD CUSTOM IMAGE TEMPLATE ... 268
18.3.1 Templates folder choice ... 268
18.3.2 Prepare template file ... 268
18.3.3 Prepare interface format and name lines ... 269
18.3.4 Edit your new template file: ... 271
18.3.5 Prepare new icon for your template: ... 272
18.3.6 Template use ... 272
18.4 HOW TO HIDE UNUSED IMAGES IN THE NODE LIST ... 272

19 EVE RESOURCES ... 273

© EVE-NG LTD

Preface

When I first heard about EVE-NG I was skeptical. Back then I used to Lab mainly with ESX by deploying many virtual Devices and connecting them manually by separate vSwitches for Point-to-Point connections. The Problem with that was, that it was extremely time-consuming and did not scale - for every new Device I had to create multiple vSwitches to interconnect them with the virtual Machines - a Nightmare. I was in the middle of my JNCIE-Exam-Prep when I first saw EVE-NG on Twitter - I downloaded the Community Edition, which was the only Edition back then and I was amazed how easy Labbing all of a sudden was. No more deploying of vSwitches to interconnect nodes and boy did it Scale…
If you follow me on Twitter you know, that I'm one of the hardest Juniper Fanboys and of course my Goal was to "Juniperize" EVE. I started to get in touch with UD and Alain and found myself into the Position as one of the Juniper Test Guys. Meanwhile I added nearly all Juniper related Devices (including vSRX and JATP) and I still test a Lot - but now on EVE-Pro.
The Pro-Edition was a big step forward for the Project. It added some nice Features like "hot-add-interconnect" and the Ability to use EVE-NG with multiple Users. Especially Companies will love EVE as it is THE Solution for Labs and PoC's. I have successfully run over 30 PoC's in EVE and over 100 Labs (Job-Related and Personal Labs) - and I still enjoy it every day thanks to EVE and the amazing Team behind it. When the Guys asked me to write the Introduction I was of course honored and now this Book is finally coming out to help you on your Quest to Setup, Run and Manage EVE-NG in a lot of possible ways.

Well - enough from my Side. I hope you enjoy this Cookbook and use it wisely for your Everyday EVE Work. If you have Problems there is always the EVE-Forum and Live-Helpdesk - you will also find me there from time to time ;)
I wish you happy reading and if you think, that this Product is amazing feel free to support it by buying the PRO-Edition or Donating a bit – it helps to expand this already cool Product even more and it also honors all the work that the Guys spent in it.

Christian Scholz
@chsjuniper

© EVE-NG LTD

1 Introduction

1.1 What is EVE-NG?

To describe what **E**mulated **V**irtual **E**nvironment **– N**ext **G**eneration (EVE-NG) is without solely stating dry facts about features, we need to elaborate more on what EVE-NG can be used for and whom it would be useful for.
In some trivial dry words, EVE-NG gives you tools to use around virtual devices and interconnect them with other virtual or physical devices. Many of its features greatly simplify the usabilities, re-usability, manageability, interconnectivity, distribution and therefore the ability to understand and share topologies, work, ideas, concepts or simply “labs”. This can simply mean it will reduce the cost and time to set up what you need or it might enable you to do tasks you would not have thought could be done this simple.

1.2 What is EVE-NG used for?

This is the real question but there is no finite answer, the possibilities are almost limitless and depends on what you want to use it for.
It can be used for studying all kinds of technologies. You can learn about general technologies or vendor specific topics. You can test new technologies like network automation, SDN, etc.
It can be used to recreate corporate networks and test changes before putting them into production. You can create proof of concepts for clients. You can troubleshoot network issues by recreating them and e.g. use Wireshark to inspect packets.
It is most definitely not just for networking, it can be used to test software in simulated networks, test out security vulnerabilities of any kind, system engineering like LDAP and AD servers and many more areas.
You could set it up to automate sandboxing unknown files/software and use software to analyse short and long term behaviour for malicious intent much simpler than without EVE-NG.
The list of what EVE-NG can be used for could go on indefinitely, possibilities are limited by knowledge and imagination only. Both of which can be improved with EVE-NG.
To get a very small idea of what can be done with EVE-NG, check out the tested/supported images (many have not been tested, almost everything virtual should run on EVE-NG) and refer to section **17.**
EVE-NG helps you achieve what you want to and more.

1.3 Who is EVE-NG for?

EVE-NG is for everyone working in the Information Technology Sector, period.
It is for very large enterprise companies, training facilities, service providers, consultants, people who want to train themselves; it is for everyone, it is for YOU!
Use-cases that are more than worth it, almost priceless even, can be found everywhere.

The EVE-NG community version is free for everyone; while the paid professional version adds a few things that make your life easier. Almost everything can still be done with the free version, just less conveniently and therefore more time-consuming.
However, with the free version, the possibility to train yourself with technologies, hone your skills and become an expert even with very no monetary possibilities. For some this is and has been life changing.

© EVE-NG LTD

2 System requirements

EVE-NG is available in the OVF or ISO file format. The Open Virtualization Format (OVF) is an open standard for packaging and distributing virtual appliances. It can be used to deploy a VM in hypervisors like VMware Workstation, Player and ESXi. Please note that installing EVE as a Virtual Machine (VM) will mean any nodes deployed within EVE will be nested. Nested virtualization causes degraded performance in deployed nodes. This should be fine for lab purposes as long as the host meets or exceeds the resource requirements for the deployed nodes.

EVE-NG can also be installed directly on physical hardware, without a hypervisor, using the provided ISO image. This is referred to as a “bare metal” install and is the most recommended method of installing EVE-NG.

2.1 Hardware requirements

2.1.1 Minimal Laptop/PC Desktop system requirements

Prerequisites:

CPU: Intel CPU supporting Intel® VT-x /EPT virtualization
Operating System: Windows 7, 8, 10 or Linux Desktop
VMware Workstation 14.0 or later
VMware Player 14.0 or later

PC/Laptop HW requirements	
CPU	Intel i5/i7 (4 Logical processors), Enabled Intel virtualization in BIOS
RAM	8Gb
HDD Space	50Gb
Network	LAN/WLAN
EVE Virtual machine requirements	
CPU	4/1 (Number of processors/Number of cores per processor) Enabled Intel VT-x/EPT virtualization engine
RAM	6Gb or more
HDD	50Gb or more
Network	VMware NAT or Bridged network adapter

Note: Minimal PC Desktop/Laptop will be able to run small Labs. The performance and quantity of nodes per lab depend on the types of nodes deployed in the lab.

Example:
IOL image-based nodes: up to 40-50 nodes per lab
Dynamips image-based nodes: up to 20-25 nodes per lab
vIOS image-based nodes: up to 8-10 nodes per lab
CSRv1000 or XRv image-based nodes: up to 2-3 per lab

© EVE-NG LTD

2.1.2 Recommended Laptop/PC Desktop system requirements

Prerequisites:

CPU: Intel CPU supporting Intel® VT-x /EPT virtualization
Operation System: Windows 7, 8, 10 or Linux Desktop
VMware Workstation 14.0 or later
VW Ware Player 14.0 or later

PC/Laptop HW requirements	
CPU	Intel i7 (8 Logical processors), Enabled Intel virtualization in BIOS
RAM	32Gb
HDD Space	200Gb
Network	LAN/WLAN
EVE Virtual machine requirements	
CPU	8/1 (Number of processors/Number of cores per processor) Enabled Intel VT-x/EPT virtualization engine
RAM	24Gb or more
HDD	200Gb or more
Network	VMware NAT or Bridged network adapter

Note: PC Desktops/Laptops will be able to run small to medium Labs. Performance and quantity of nodes per lab depend on the type of nodes deployed in the lab.

Example:
IOL image-based nodes: up to 120 nodes per lab
vIOS image-based nodes: up to 20-40 nodes per lab
CSR image-based nodes: up to 10 per lab

2.1.3 Virtual Server system requirements

Prerequisites:

CPU: Intel Xeon CPU supporting Intel® VT-x with Extended Page Tables (EPT)
Operation System: ESXi 6.0 or later

Server HW requirements	
CPU	Recommended CPU 2x Intel E5-2650v3 (40 Logical processors) or better supporting Intel® VT-x with Extended Page Tables (EPT) Minimum CPU is any Intel Xeon CPU supporting Intel® VT-x with Extended Page Tables (EPT)
RAM	128Gb
HDD Space	2Tb
Network	LAN Ethernet
EVE Virtual machine requirements	
CPU	32/1 (Number of processors/Number of cores per processor) Enabled Intel VT-x/EPT virtualization engine
RAM	64Gb or more
HDD	800Gb or more

© EVE-NG LTD

Network	vSwitch/VMnet

Note: Performance and quantity of nodes per lab depends from the type of nodes used in the lab.

Example:
120 IOL image-based lab
20 CSRv1000 image-based nodes per lab

2.1.4 Dedicated Server (bare) system requirements

Prerequisites:

CPU: Intel Xeon CPU supporting Intel® VT-x with Extended Page Tables (EPT)
Operation System: Ubuntu Server 18.04 LTS x64

Server HW requirements	
CPU	Recommended CPU Intel E5-2650v3 (40 Logical processors) or better supporting Intel® VT-x with Extended Page Tables (EPT) Minimum CPU is any Intel Xeon CPU supporting Intel® VT-x with Extended Page Tables (EPT)
RAM	128Gb
HDD Space	2Tb
Network	LAN Ethernet

Note: Performance and quantity of nodes per lab depends from type of nodes used in the lab.

2.1.5 Nodes per lab calculator

It is recommended to use the “nodes per lab calculator” to achieve best performance and avoid overloading your EVE system.

2.1.6 Hardcoded Subnets in the EVE

NOTE: Please make sure if these subnets are NOT used in your network outside of EVE.

172.29.129.0/24 (NAT Interface)
172.29.130.0/24 (Cluster subnet)
172.17.0.0/16 (Dockers consoles)

These networks CAN NOT be changed, because are involved in many EVE code processes.

2.2 Supported virtualization platforms and software

- VMware Workstation 14.0 or later
- VMware Player 14.0 or later
- VMware ESXi 6.0 or later
- Ubuntu Server 18.04 LTS as platform for bare metal

© EVE-NG LTD

- Google Cloud Platform
- AMD CPU based PC or Server (the Newest AMD CPU versions are supported)

2.3 Unsupported hardware and systems

The following are currently not supported officially:

- VirtualBox virtualization
- Citrix XenServer
- Microsoft HyperV
- Ubuntu 20.x
- Proxmox

© EVE-NG LTD

3 Installation


3.1 VMware Workstation or VM Player

3.1.1 VMware workstation EVE VM installation using ISO image (preferred)

⚠ Mandatory Prerequisites: Internet must be reachable from your PC and VMware. EVE ISO installation requires internet access to get updates and install the latest EVE-PRO version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com


Download EVE-NG Professional ISO distribution image:
https://www.eve-ng.net/index.php/download/

3.1.1.1 EVE VM Setup and Settings

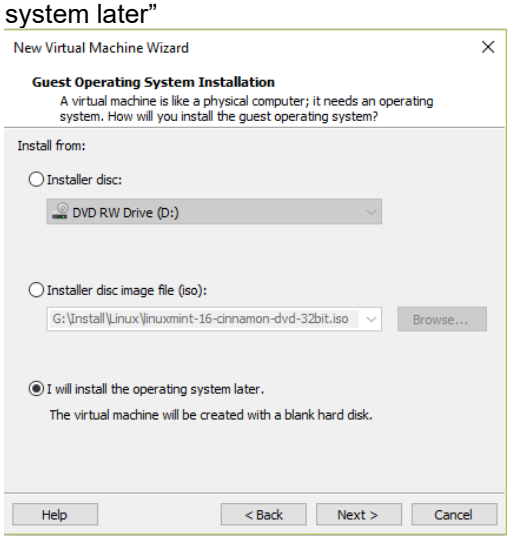
Step 1: Create a New Virtual machine	Step 2: Select “I will install the operating system later”
	

© EVE-NG LTD


Step 3: Select a Guest Operating system: Linux and select the version: Ubuntu 64-bit

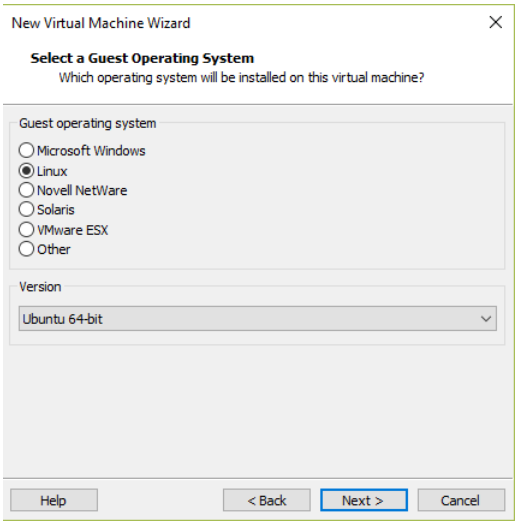


Step 4: Enter the name for your EVE-PRO VM and select Location where your EVE VM will be stored on the host PC.

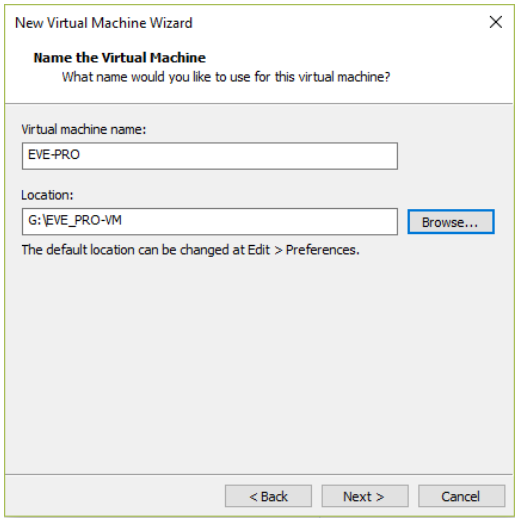

Step 5: Type your **desirable** HDD size and select “Store virtual disk as single file”.

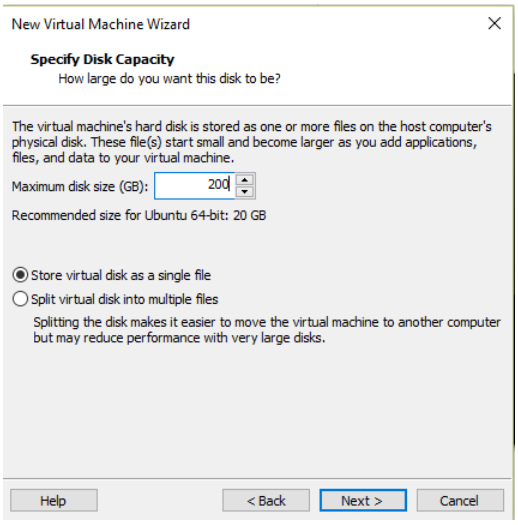


Step 6: Press Customize Hardware

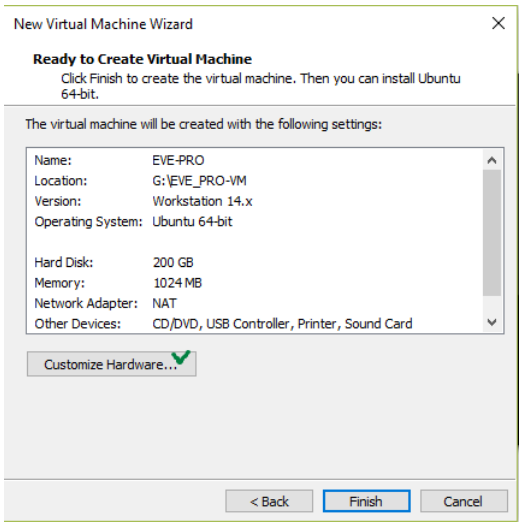


Step 7: Assign desirable memory

Step 8: Set Processors “Number of processors” and “Number of cores per

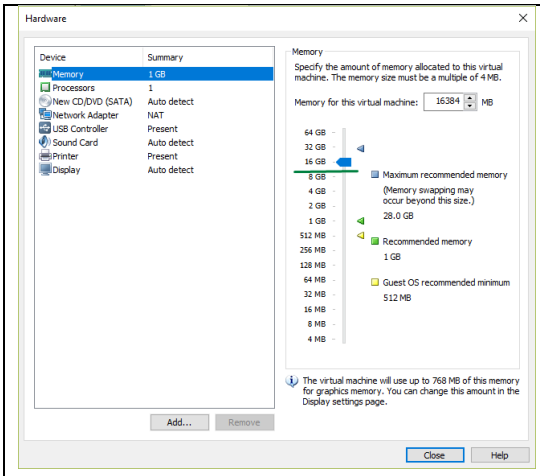


processor". Set Intel VT-x/EPT Virtualization engine to ON (checked).

NOTE: VMware Player will display only one CPU option: Number of processors.

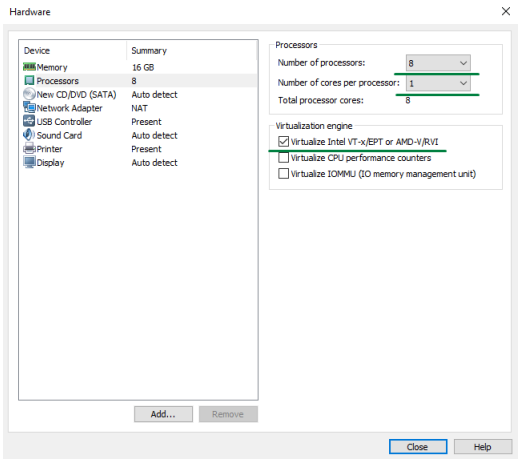


Step 9a: Select your desirable Network Adapter. **Laptop PC**

NOTE: It is recommended to choose the NAT adapter option for Laptops to avoid EVE management interface IP changes. This can happen anytime the laptop is connected to a different SSID

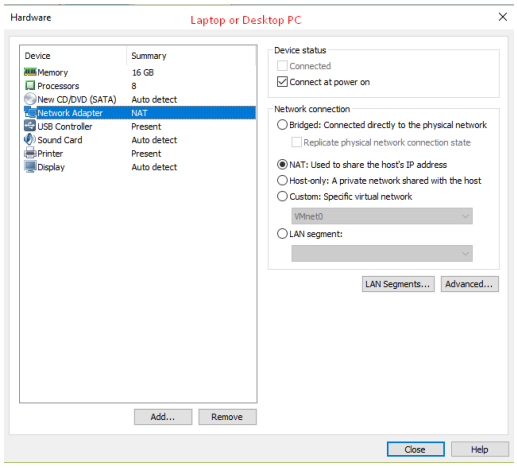

Step 9b: Select your desirable Network Adapter. **Desktop PC**


NOTE: Desktop PC EVE management interface can be either NAT or Bridged to home LAN subnet.

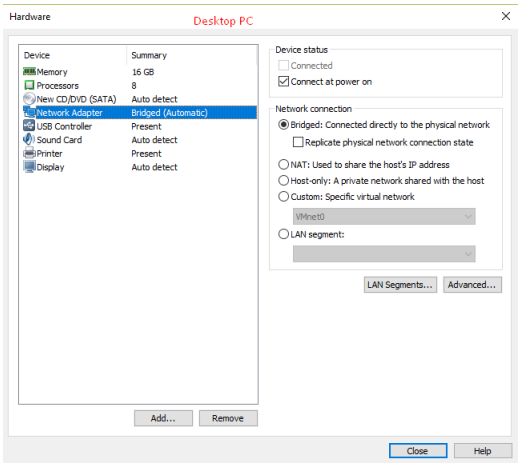

Step 10: Select CD/DVD Option: "use ISO image file." Browse to your downloaded

Step 11: Confirm VM Settings.

© EVE-NG LTD

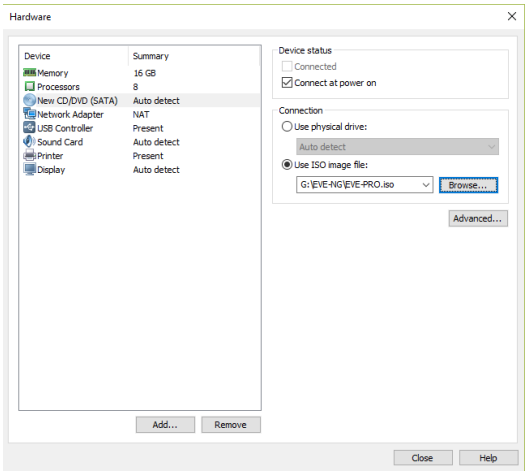
EVE-PRO.iso (actual name can be different) file 	

3.1.1.2 EVE-NG VM Installation steps





⚠ Mandatory Prerequisites: Internet must be reachable from your PC and VMware. EVE ISO installation requires internet access to get updates and install the latest EVE-PRO version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com

EVE VM Installation from ISO has 3 Phases


Phase 1 (Ubuntu installation)

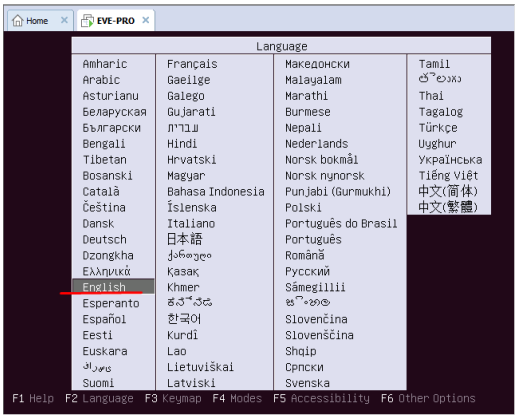
Step 1: Power ON EVE VM. Chose English and confirm with Enter. 	Step 2: Be sure that “Install EVE PRO VM” is highlighted. Confirm with Enter. 

Step 3: Make sure that English is selected and confirm with Enter.	Step 4: You can select your own Location, or later, after management IP assignment,

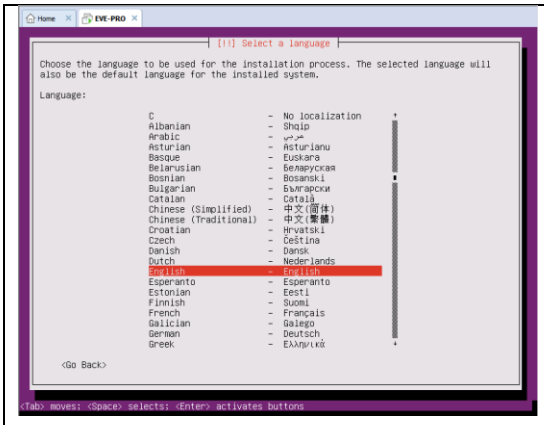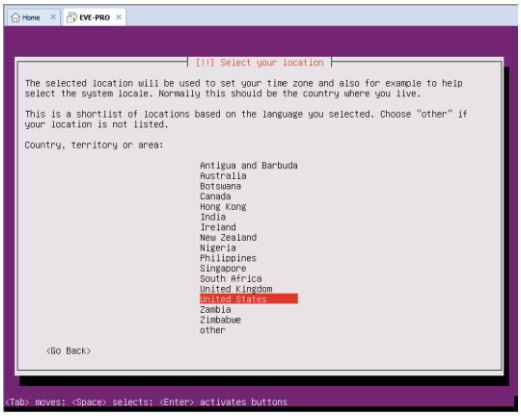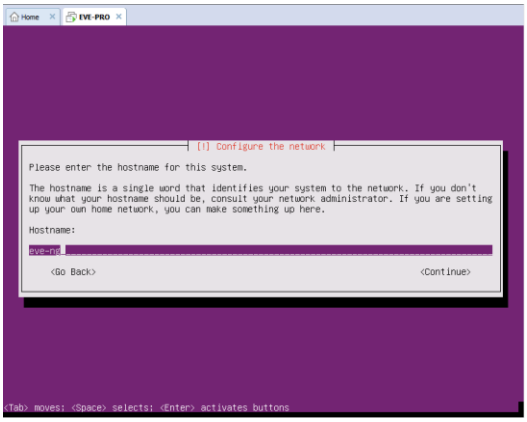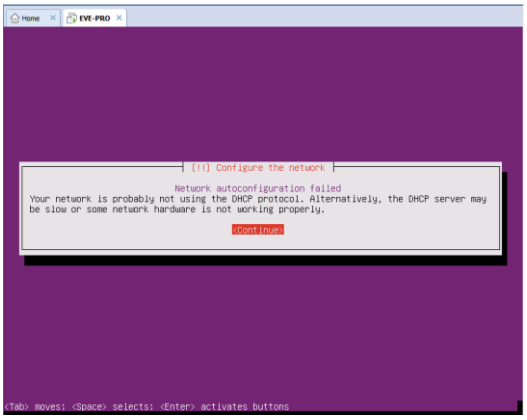
	location will be set automatically. You can leave United States. Confirm with Enter. 
Step 5: **DHCP ENABLED**, EVEs hostname by default is **eve-ng**. You can change it if you wish. Using the Tab key select continue and confirm with Enter. Continue to **Step 14** 	Step 6: **DHCP DISABLED**/Static IP setup. If you have not enabled DHCP in the network, you must assign an IP address manually. Confirm Continue with Enter. 
Step 7: Confirm selection “Configure network manually” with Enter	Step 8: Enter your desirable EVE management IP, using the Tab key select “Continue” and confirm with Enter

© EVE-NG LTD

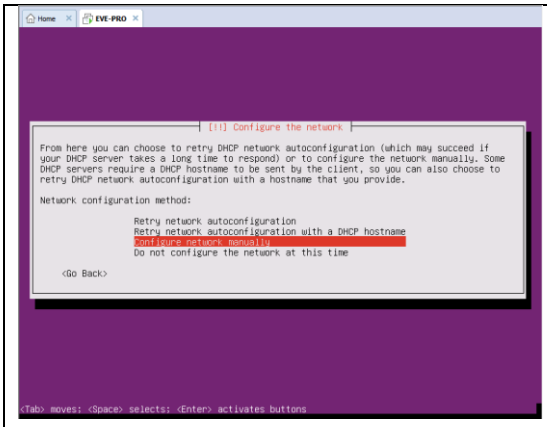


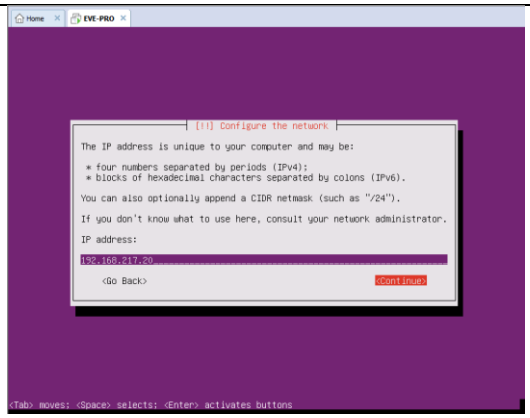

Step 9: Enter your subnet mask, using the Tab key select “Continue” and confirm with Enter

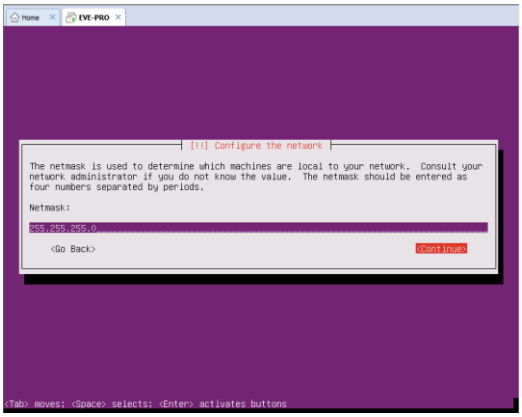


Step 10: Enter your Gateway IP, using the Tab key select “Continue” and confirm with Enter

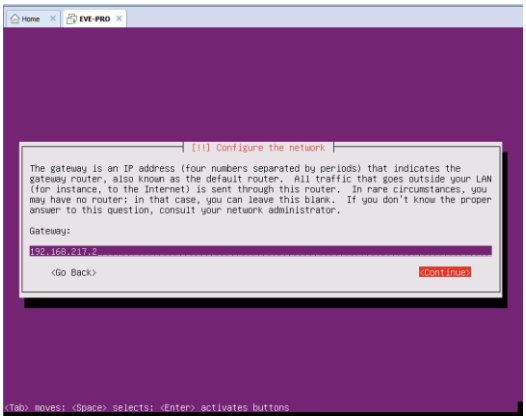


Step 11: IMPORTANT. The name server must be able to resolve public DNS entries and will be used during the next install steps. Enter your name server IP, using the Tab key select “Continue” and confirm with Enter


Step 12: EVEs hostname by default is **eve-ng**. It can be changed if you wish, using the Tab key select continue and confirm with Enter

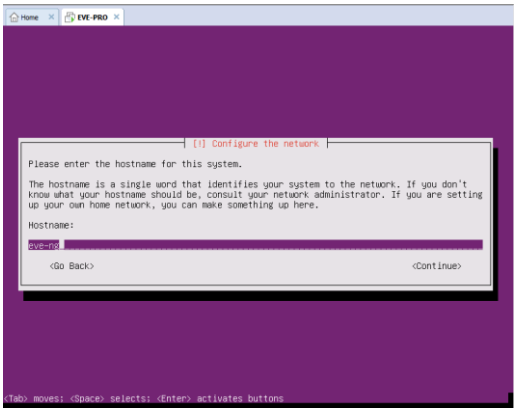


© EVE-NG LTD

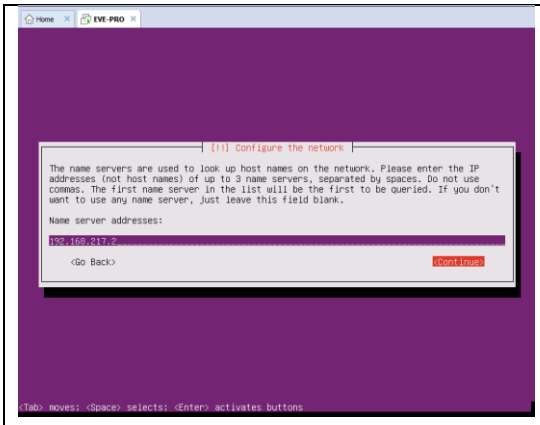

Step 13: Enter your networks domain name. You are free to use anything you like, for example: **eve-ng.net**
Using the Tab key select continue and confirm with Enter

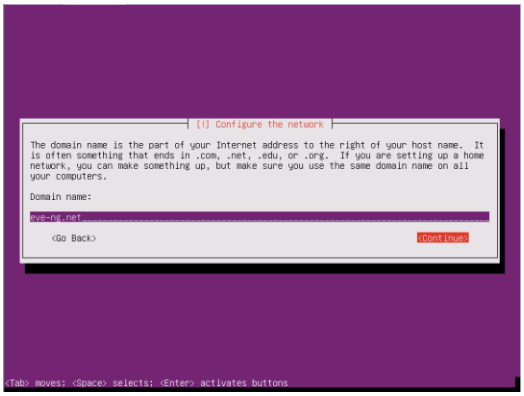


Step 14: If your DNS IP settings are correct, Ubuntu will detect your location automatically by connecting to Ubuntu servers. Confirm with Enter.

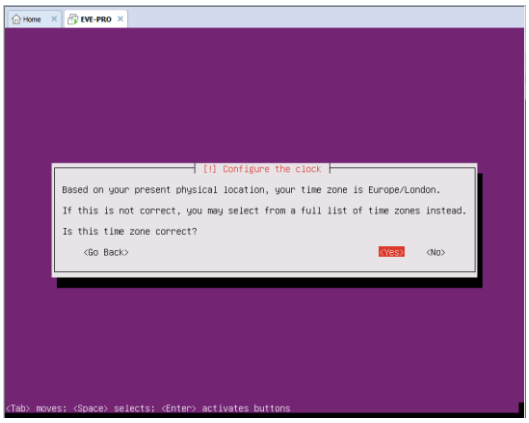


Step 15: Select Continue and confirm with Enter. If required, proxy settings can be configured later using EVE WEB GUI System/System Settings described in section **3.5.3**

Step 16: Select no automatic updates and confirm with Enter. Security updates can later be run manually from EVE cli.


© EVE-NG LTD

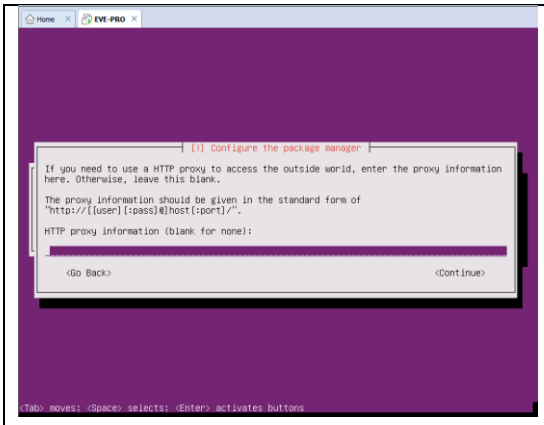

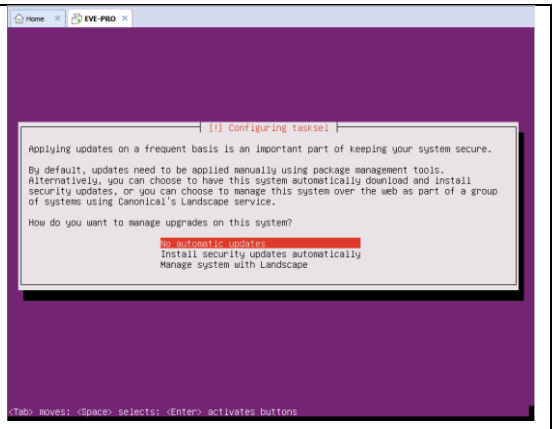


EVE VM Installation Phase 2 (EVE installation)

Step 17: Continue with Enter, the EVE VM will reboot and finish the installation phase 2

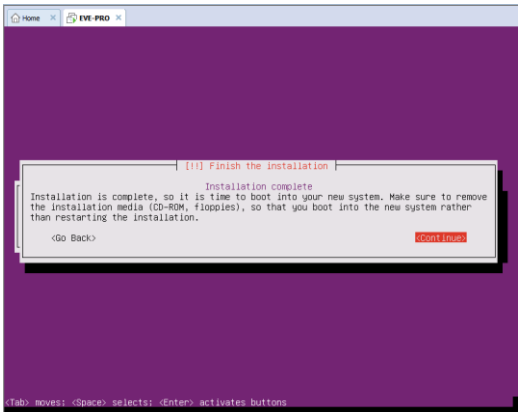

Step 18: Once the EVE login screen appears, login to the CLI with root/eve and continue with installation phase 3

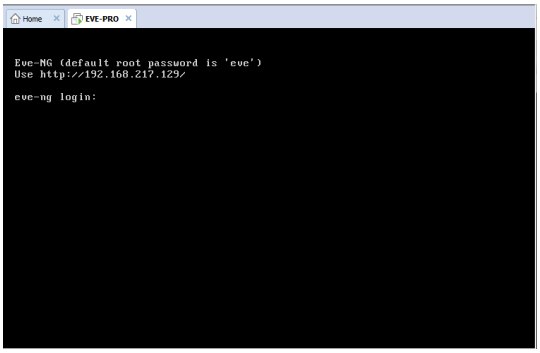

EVE VM Installation Phase 3 (Management IP setup and updates)

Step 19: Setup EVEs Management IP address. A Static IP address setup is preferred.

Follow steps in section:

3.5.1 for static IP, **3.5.2** for DHCP IP

Step 20: After your EVE is rebooted,

Login to EVE CLI and type:

```
apt update
apt upgrade
```

Follow steps in section: **5.1**, **5.2**

NOTE: Verify your EVE-NG server installation, type “dpkg -l eve-ng-pro” command, it must display latest EVE Pro version

```
root@eve-ng:~# dpkg -l eve-ng-pro
Desired=Unknown/Install/Remove/Purge/Hold
|       Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-
aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
```

© EVE-NG LTD

```
||/ Name                                  Version              Architecture
Description
+++-=========================-================-================-
==========================================================
ii  eve-ng-pro                      4.0.1-3              amd64                A
new generation software for networking labs.
root@eve-ng:~#root@eve-sat01:~#
```

NOTE: If your newly installed EVE-PRO shows nothing like above, you must check your internet reachability and verify DNS configuration on your EVE-PRO server.

```
root@eve-ng:~# ping www.google.com
PING www.google.com (172.217.22.164) 56(84) bytes of data.
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=1
ttl=120 time=8.84 ms
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=2
ttl=120 time=8.84 ms
^C
--- www.google.com ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1001ms
rtt min/avg/max/mdev = 8.848/8.848/8.849/0.094 ms
root@eve-ng
```

Launch EVE-PRO installation manually


```
root@eve-ng:~# cd /etc
root@eve-ng:~# ./eve-setup
```

Step 21: After update, Step 20 is completed, continue with type:


```
apt install eve-ng-dockers
```

This can take some time depending on your Internet connection and disk speed.

Your output after install must look like:



Step 22: (Optional) If after dockers first install (Step 21) in the output “dc images” you still seeing some docker name in the list as <none>,



please run the command:

```
apt install --reinstall eve-ng-dockers
```

You must get output like in the step 21.

Step 25: Proceed to section **4** “Obtain EVE-NG Professional license”





⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section **17**

3.1.2 VMware workstation OVF deployment


Download EVE-NG Professional OVF image zip file, place it in the dedicated HDD storage for EVE VM and unzip it:
https://www.eve-ng.net/index.php/download/


© EVE-NG LTD

3.1.2.1 Deployment and VM machine settings

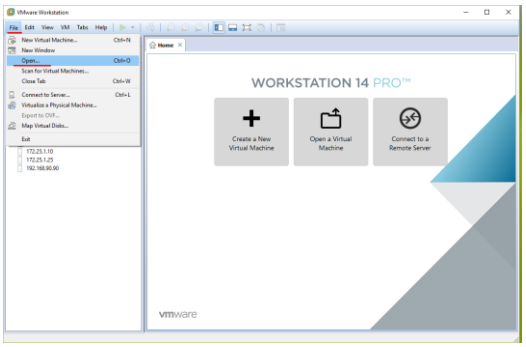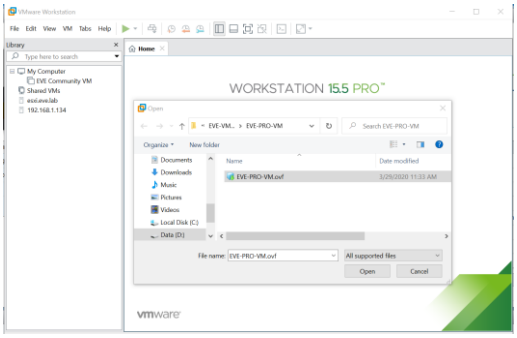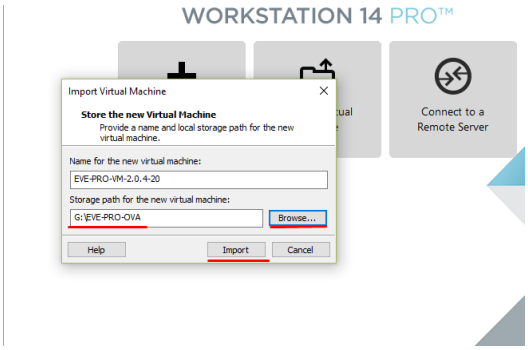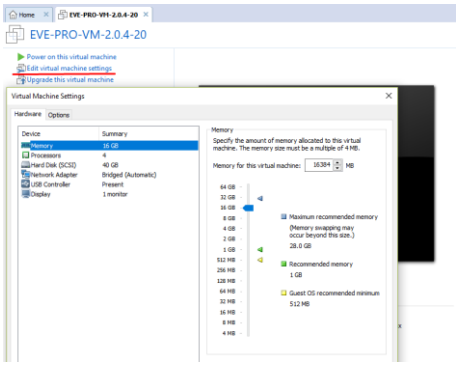Step 1: VMware workstation or VM Player, Menu File/Open 	Step 2: Browse your downloaded and unzipped EVE-PRO, EVE-PRO-VM.ovf, followed by Open 
Step 3: Browse your desired EVE VM store destination followed by Import 	Step 4: Open your EVE VM Settings and set the desired RAM. 
Step 5: IMPORTANT Set CPU Number of Cores and number of cores per processor. Set Intel VT-x/EPT Virtualization engine to ON (checked). NOTE: VMware Player will display only one CPU option: Number of processors.	Step 6: **Laptop PC** Select your desirable Network Adapter. NOTE: It is recommended to choose the NAT adapter option for Laptops to avoid EVE management interface IP changes. This can happen anytime the laptop is connected to a different SSID.


© EVE-NG LTD

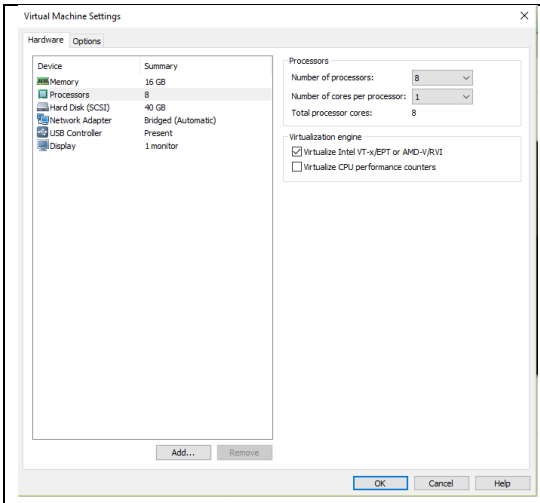

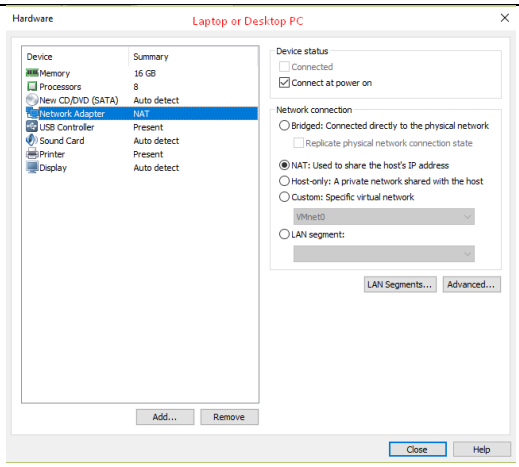

Step 7: **Desktop PC** Select your desirable Network Adapter.

NOTE: Desktop PC EVE management interface can be either NAT or Bridged to home LAN subnet.

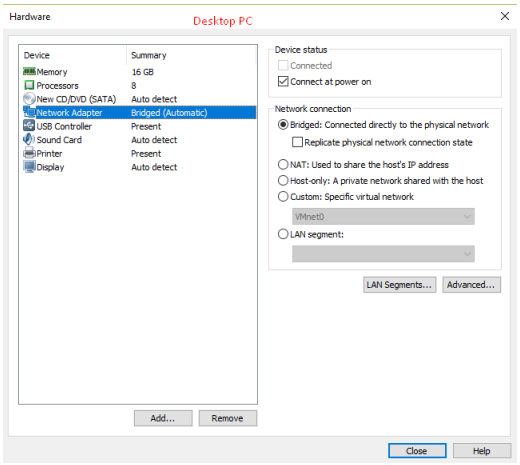

Step 8: Power ON your EVE VM and follow Management IP setup instructions described in section **3.5.1** for Static IP or **3.5.2** for DHCP IP.

Step 9: Proceed to section **4** "Obtain EVE-NG Professional license"

⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section **17**

3.1.2.2 OVF VM update to the latest EVE version

Step 9: Make sure if your EVE OVF VM is up to date to the newest EVE version. Follow the steps described in section **5**.

© EVE-NG LTD

3.1.2.3 OVF VM HDD Size expansion

⚠ IMPORTANT NOTE: DO NOT expand the current EVE OVF HDD. To expand your EVE system size, please follow Troubleshooting section **16.2**





3.2 VMware ESXi

3.2.1 VMware ESXi EVE installation using ISO image (preferred)

⚠ Mandatory Prerequisites: Internet must be reachable from your Server and ESXi. EVE ISO installation requires internet access to get updates and install the latest EVE-PRO version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com


Download EVE-NG Professional ISO distribution image:
https://www.eve-ng.net/index.php/download/

3.2.1.1 EVE-NG ESXi VM Setup and Settings

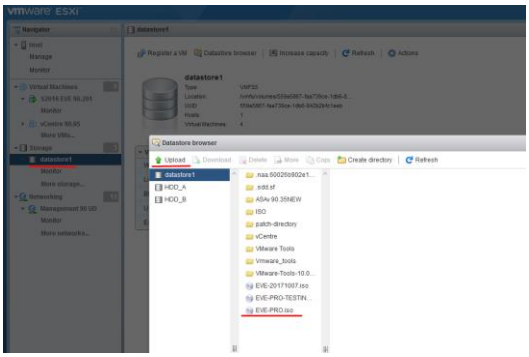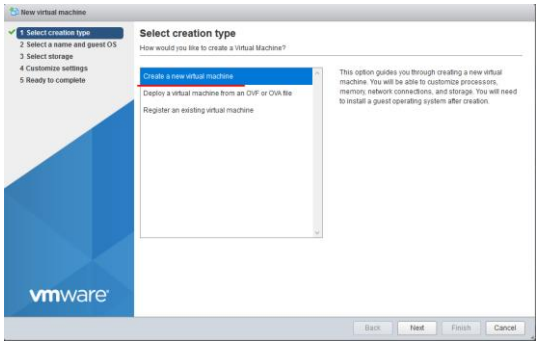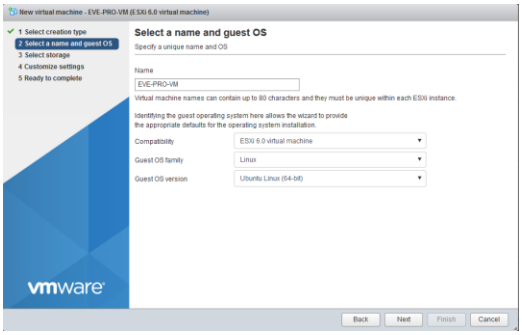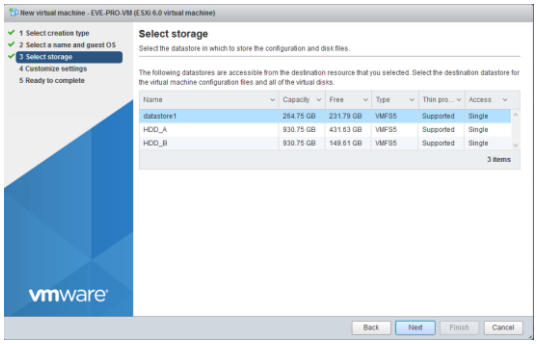
Step 1: Upload EVE ISO image to the ESXi store. 	Step 2: Create NEW VM 
Step 3: Enter the name for your EVE-PRO VM and select Guest Operating system Linux and version: Ubuntu 64-bit 	Step 4: Select Location where your EVE VM will be stored in HDD. 

© EVE-NG LTD


Step 5: IMPORTANT Customize your EVE VM CPU Settings. Set CPU Number of Cores and number of cores per processor. Set Intel VT-x/EPT Virtualization to ON (checked).

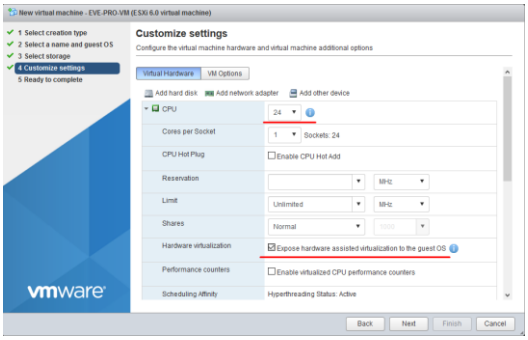


Step 6: Assig desirable RAM for your EVE

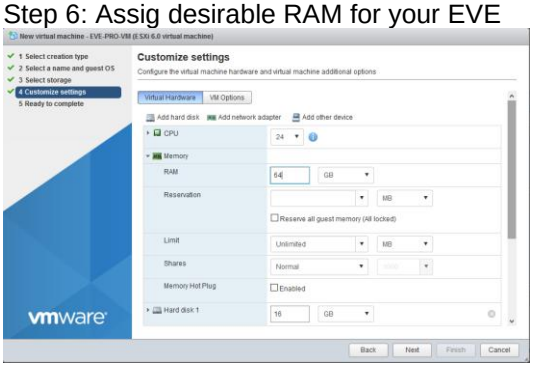

Step 7: Set the size of HDD for your new EVE VM. It is recommended to set “Thick Provisioned eagerly provisioned”. Server EVE HDD is recommended to set at least 500Gb

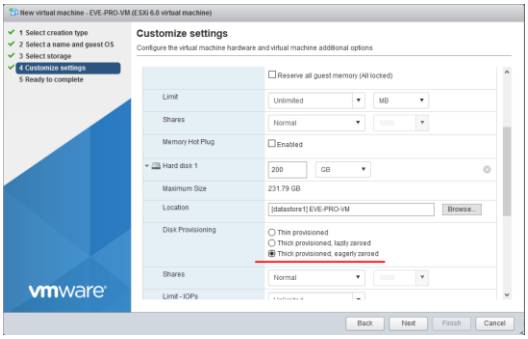

Step 8: Set your Management network. Adapter type VMXNET3

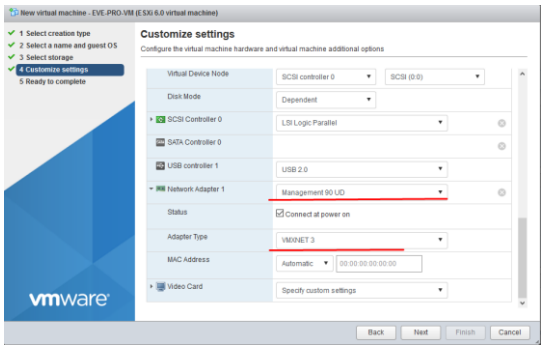



NOTE: Additional Network Adapters can be added for further use.

Step 9: Add new device to your EVE VM, CD/DVD

Step 10: Set DVD drive to “Datastore ISO File” and browse your uploaded EVE-PRO.iso. Make sure that Status is checked ON, “Connect at power on”

© EVE-NG LTD

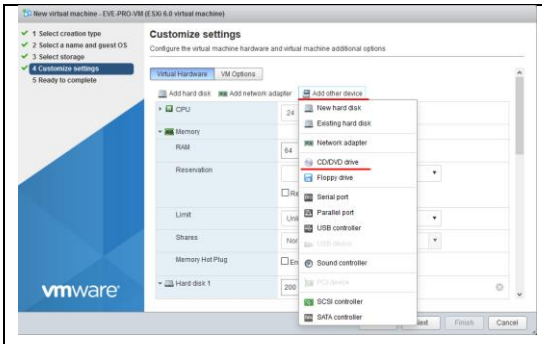

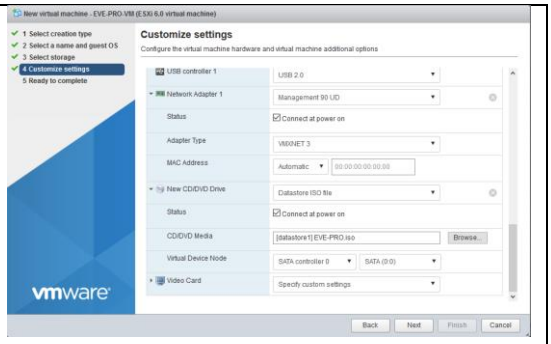


3.2.1.2 EVE-NG ESXi VM Installation steps


⚠ Mandatory Prerequisites: Internet must be reachable from your PC and VMware. EVE ISO installation requires internet access to get updates and install the latest EVE-PRO version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com


EVE ESXi VM Installation from ISO has 3 Phases

Phase 1 (Ubuntu installation)

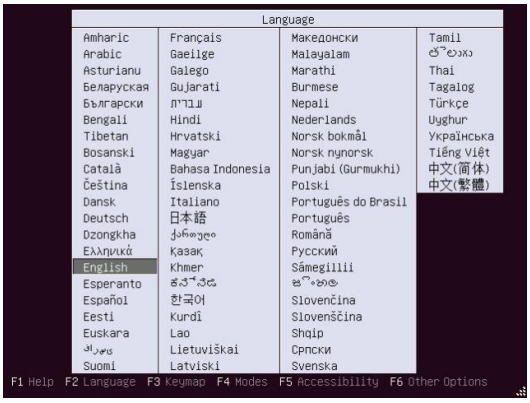
Step 1: Power ON EVE VM. Chose English and confirm with Enter.	Step 2: Be sure if “Install EVE PRO VM” is highlighted. Confirm with Enter.
	

Step 3: Make sure if English is selected and confirm with Enter.	Step 4: You can select your own Location, or later, after management IP assignment, location will be set automatically. You can leave United States. Confirm with Enter

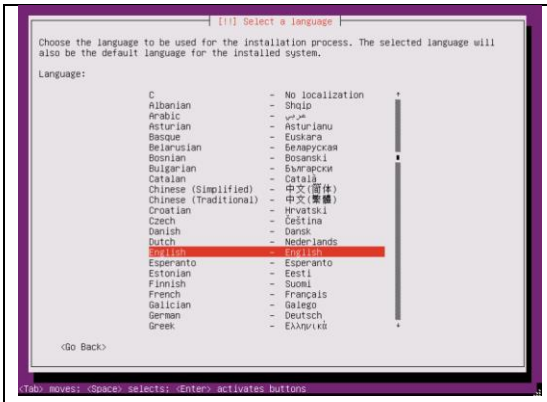


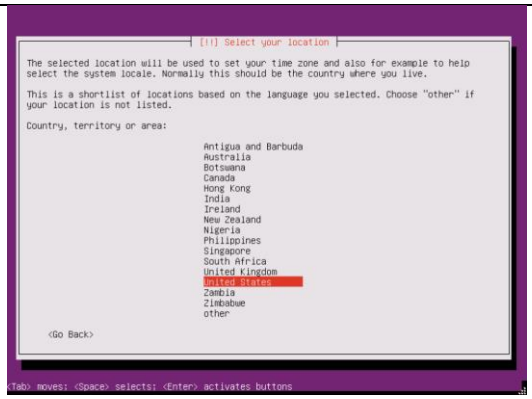


Step 5: **DHCP ENABLED**, EVEs hostname by default is **eve-ng**. You can change it if you wish. Using the Tab key select continue and confirm with Enter. Continue to **Step 14**

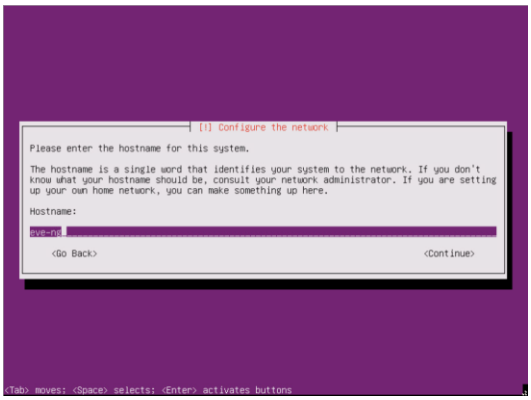

Step 6: **DHCP DISABLED**/Static IP setup. If you have not enabled DHCP in the network, you must assign an IP address manually. Confirm Continue with Enter.

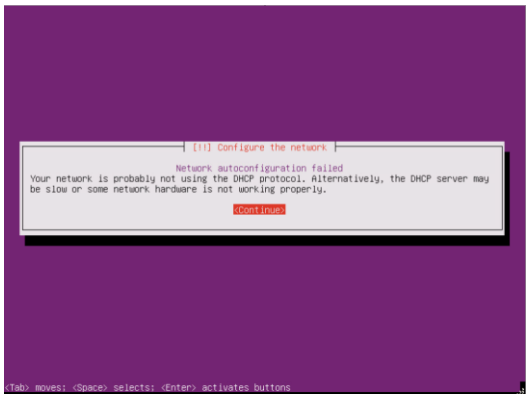


Step 7: Confirm selection “Configure network manually” with Enter

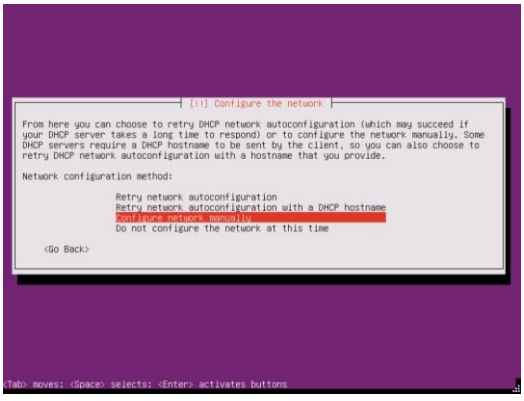


Step 8: Enter your desirable EVE management IP, using the Tab key select “Continue” and confirm with Enter



Step 9: Correct your subnet mask, using the Tab key select “Continue” and confirm with Enter

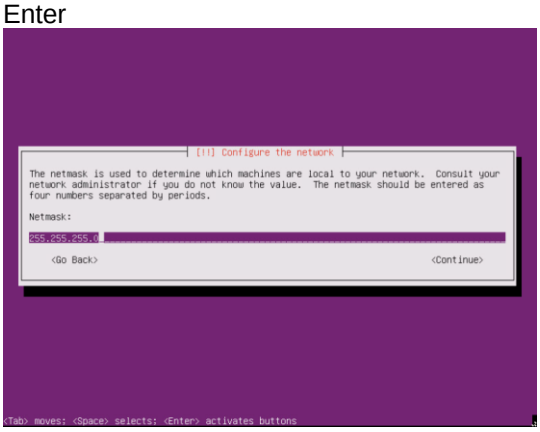


Step 10: Correct your Gateway IP, using the Tab key select “Continue” and confirm with Enter

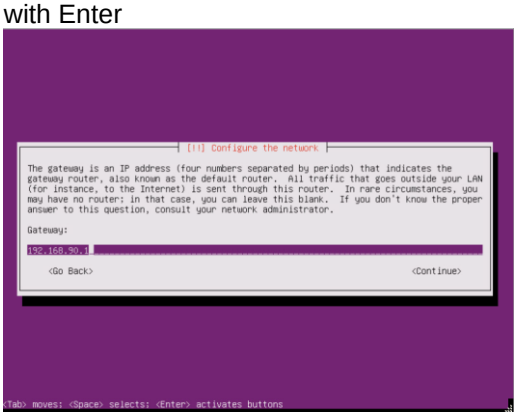


Step 11: IMPORTANT. Name server must respond to the Internet and will be used during the next install steps. Enter your name server IP. Using the Tab key select “Continue” and confirm with Enter





Step 12: EVE hostname by default is **eve-ng**. It can be changed if you wish. Using the Tab key select continue and confirm with Enter

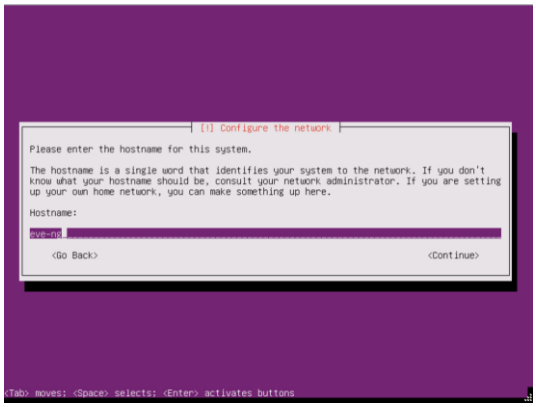

© EVE-NG LTD

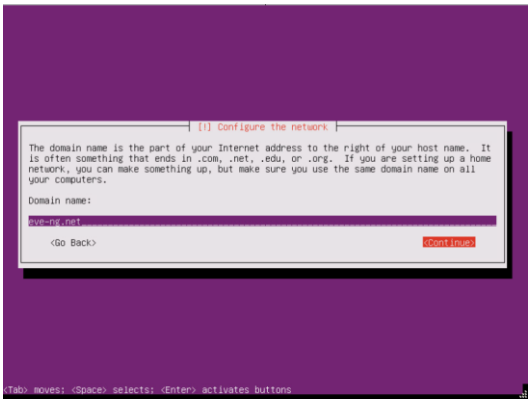Step 13: Enter your network domain name. You are free to use any, for example: **eve-ng.net** Using the Tab key select continue and confirm with Enter 	Step 14: If your DNS IP settings are correct, Ubuntu will detect your location from Internet. Confirm with Enter. 

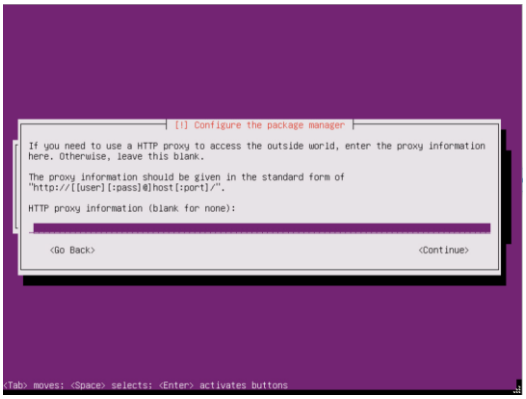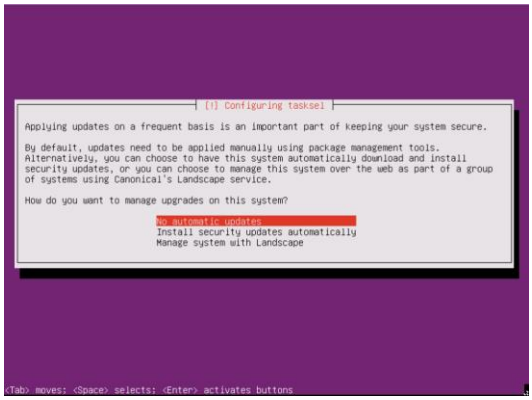Step 15: Select Continue and confirm with Enter. If required, proxy settings can be configured later using EVE WEB GUI System/System Settings described in section **3.5.3** 	Step 16: Select **no automatic** updates and confirm with Enter. Security updates can be run later manually from EVE cli. 

EVE VM Installation Phase 2 (EVE installation)

Step 17: Continue with Enter, the EVE VM will reboot and finish the installation phase 2	Step 18: Once EVE login screen appeared, login in CLI with root/eve and follow installation Phase 3

© EVE-NG LTD





EVE VM Installation Phase 3 (Management IP setup and updates)

Step 19: Setup EVE Management IP address. A Static IP address setup is preferred
 	
Follow steps in section **:**
 	
3.5.1 for static IP, **3.5.2** for DHCP IP
	Step 20: After your EVE is rebooted,
	
	Login to EVE CLI and type:
	
	`apt update`
	`apt upgrade`
	
	Follow steps in section: **5.1**, **5.2**

NOTE: Verify your EVE-NG server installation, type “dpkg -l eve-ng-pro” command, it must display latest EVE Pro version

```
root@eve-ng:~# dpkg -l eve-ng-pro
Desired=Unknown/Install/Remove/Purge/Hold
|       Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-
aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                              Version              Architecture
Description
+++-=========================-================-================-
============================================================
ii  eve-ng-pro                    4.0.1-3            amd64              A
new generation software for networking labs.
root@eve-ng:~#root@eve-sat01:~#
```

NOTE: If your newly installed EVE-PRO shows nothing like above, you must check your internet reachability and verify DNS configuration on your EVE-PRO server.



```
root@eve-ng:~# ping www.google.com
PING www.google.com (172.217.22.164) 56(84) bytes of data.
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=1
ttl=120 time=8.84 ms
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=2
ttl=120 time=8.84 ms
^C
--- www.google.com ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1001ms
rtt min/avg/max/mdev = 8.848/8.848/8.849/0.094 ms
```

© EVE-NG LTD

```
root@eve-ng
```

Launch EVE-PRO installation manually

```
root@eve-ng:~# cd /etc
root@eve-ng:~# ./eve-setup
```

Step 21: After update, Step 20 is completed, continue with type:
`apt install eve-ng-dockers`
This can take some time depending on your Internet connection and disk speed.
 	
Your output after install must look like:
`dc images`
 
	Step 22: (Optional) If after dockers first install (Step 21) in the output “dc images” you still seeing some docker name in the list as <none>,
	 
	please run the command:
	`apt install --reinstall eve-ng-dockers`
	
	You must get output like in the step 21.

Step 23: After Steps 20-22 are completed and you are back on the EVE CLI prompt, reboot EVE by typing `reboot`	NOTE: If you are installing EVE in the locked environment and cannot install dockers online, please contact with us: info@eve-ng.net for offline dockers installation option.


Step 24: Go to section **4** to obtain a license for EVE-NG Professional

⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section **17**


3.2.2 VMware ESXi OVF deployment



Download EVE-NG Professional OVF image zip file, and unzip it:
https://www.eve-ng.net/index.php/download/



3.2.2.1 ESXi OVF VM Setup and Settings

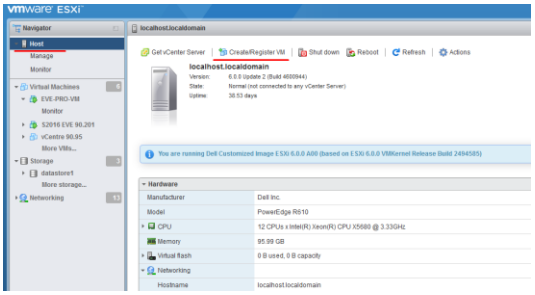Step 1: ESXi Host, Create/Register VM 	Step 2: Set option Deploy a virtual machine from an OVF or OVA file


© EVE-NG LTD

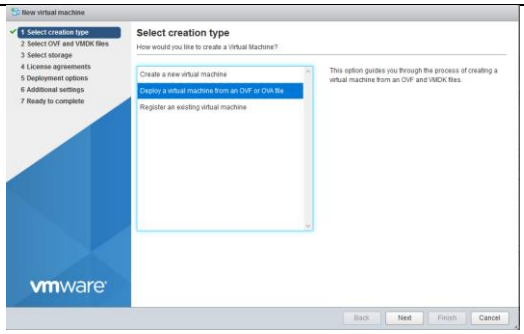Step 3: Type the name for your new EVE VM and browse to **select all your downloaded and unzipped EVE files**. 	Step 4: Select the storage where your EVE VM will be deployed. 

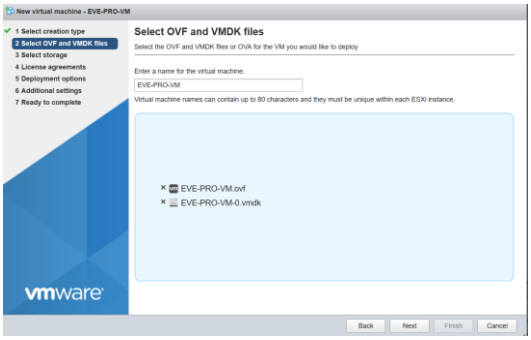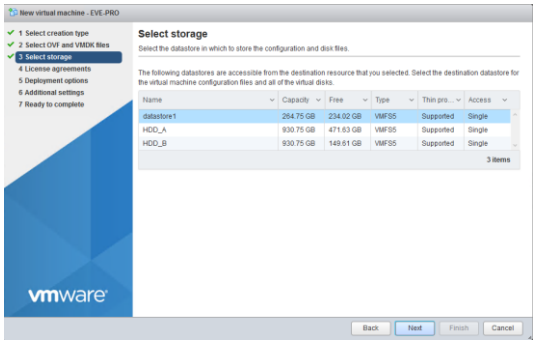Step 5: Select your Management network and **Thick Disk provisioning**. EVE OVF HDD is only 40Gb large. It is recommended after installation to add extra HDD. Section **16.2** 	Step 6: ⚠ IMPORTANT Open VM Settings. Set the quantity of CPUs and number of cores per socket. Set Intel VT-x/EPT Hardware Virtualization engine to ON (checked). 

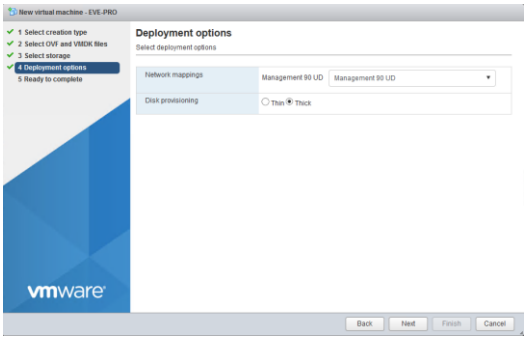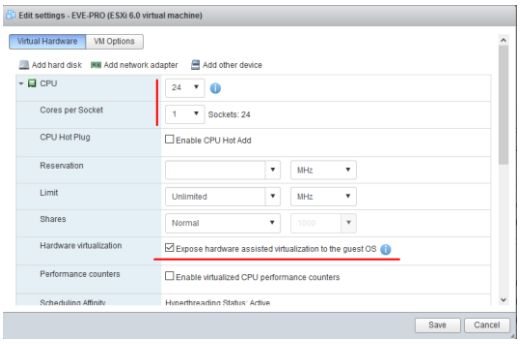© EVE-NG LTD

Step 7: Set desirable RAM for your EVE.  	Step 8: Power ON your EVE VM and follow Management IP setup instructions described in section **3.5.1** for Static IP or **3.5.2** for DHCP IP.

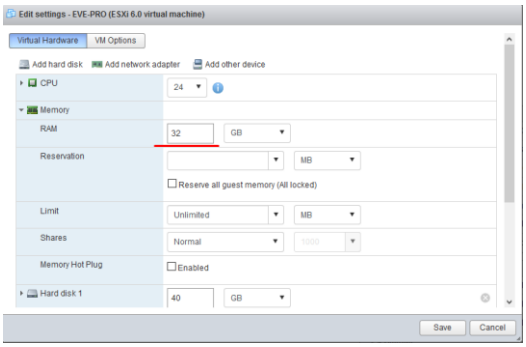Step 9: Proceed to section **4** "Obtain EVE-NG Professional license"

⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section **17**

3.2.2.2 ESXi OVF VM update to the latest EVE version

Make sure that your EVE OVF VM is up to date with the newest EVE version.
Follow the steps described in section **5** for upgrade instructions

3.2.2.3 ESXi OVF VM HDD Size expansion

⚠ NOTE: IMPORTANT! DO NOT expand the current EVE OVF HDD. To expand your EVEs system disk size, please follow the troubleshooting section **16.2**

3.3 Bare hardware server EVE installation


Download Ubuntu 18 Server ISO distribution image:
https://releases.ubuntu.com/18.04/ubuntu-18.04.6-live-server-amd64.iso


⚠ Mandatory Prerequisites: Internet must be reachable from your Server. This ISO installation requires internet access to get updates and install the latest EVE-PRO version from the EVE-NG repository. DNS must resolve names!

3.3.1 Ubuntu Server Installation Phase 1


Step 1: Create a bootable DVD disk or USB flash drive with an Ubuntu server image. Boot your server from ISO. Make sure that English is selected, Confirm with Enter	Step 2: Select "Update to the new installer" Confirm with Enter

© EVE-NG LTD

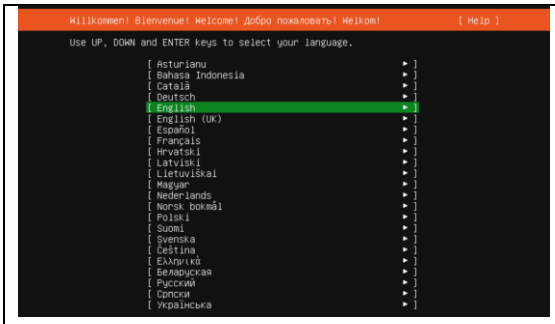


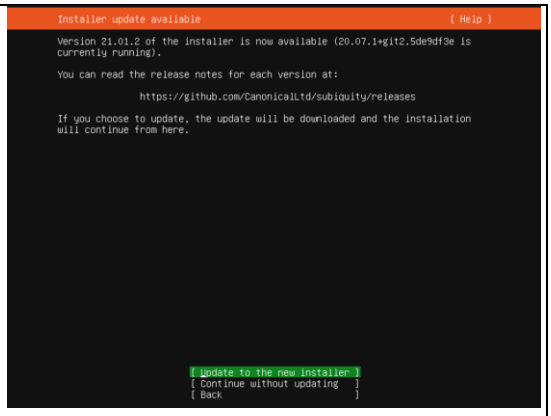

Step 3: Make sure that English is selected and confirm Done with Enter

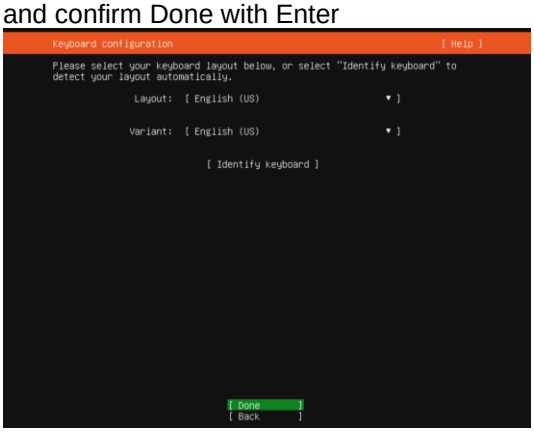


Step 4: It is strongly recommended to use Static IP address for bare metal server. Use Tab key and select ensXXX ethernet interface to edit, confirm with Enter

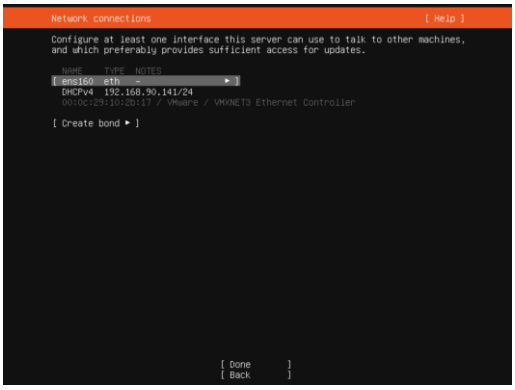


Step 5: Select “Edit IPv4”, confirm with enter.




Step 6: Hit Enter, to select IPv4 method. Use down arrow key to select Manual. Confirm with Enter

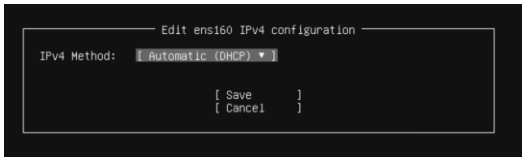

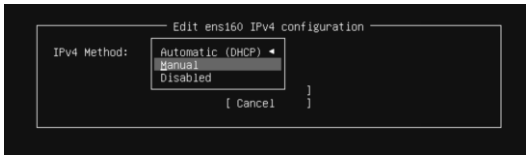


© EVE-NG LTD


Step 7: Using Tab key fill your network settings. Select Save and confirm with Enter. The name server must be able to resolve public DNS entries!

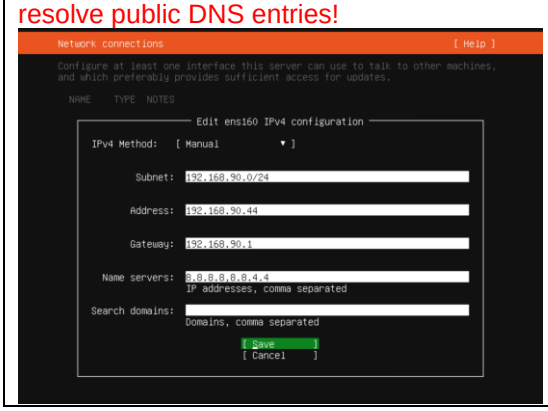


Step 8: Using Tab key select “Done” and confirm with Enter

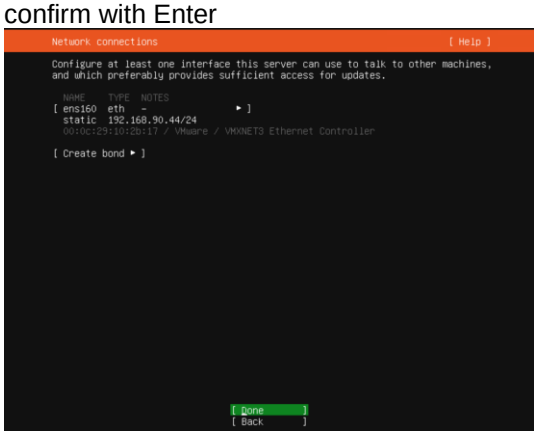


Step 9: Select Done and confirm with Enter. If required, proxy settings can be configured later using EVE WEB GUI System/System Settings described in section **3.5.3**

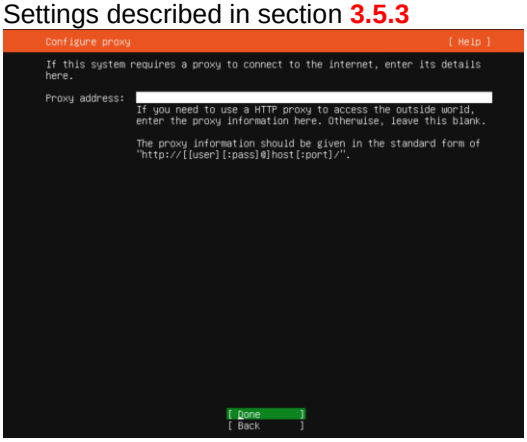


Step 10: If your network and DNS is configured properly, Ubuntu install will offer ubuntu mirror address from closest source. Continue with Enter.

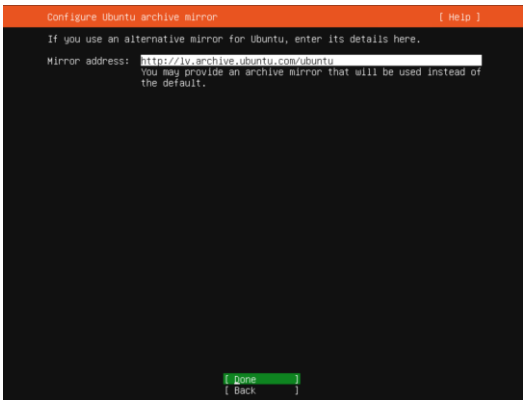

Step 11: Leave all default settings. Make sure is selected “Use entire disk” and “Set up this disk as LVM group”. Unselected “Encrypt the LVM group with LUKS”. Select Done and confirm with Enter.

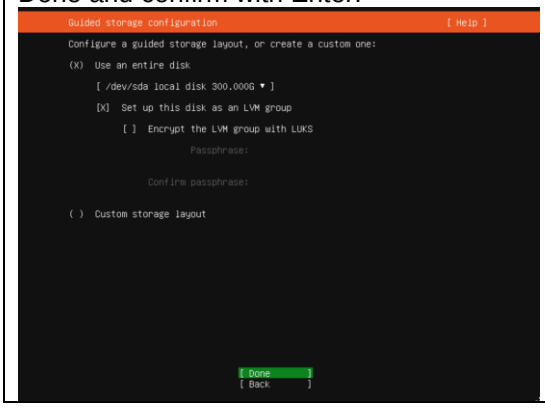


Step 12: Verify your HDD setting, select Done and confirm with Enter

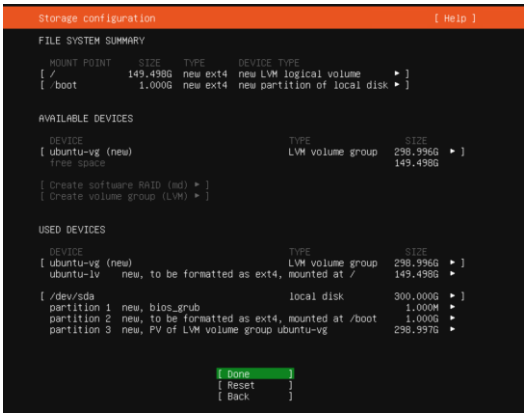


© EVE-NG LTD


Step 13: Using Arrow down key select “Continue” and confirm with Enter

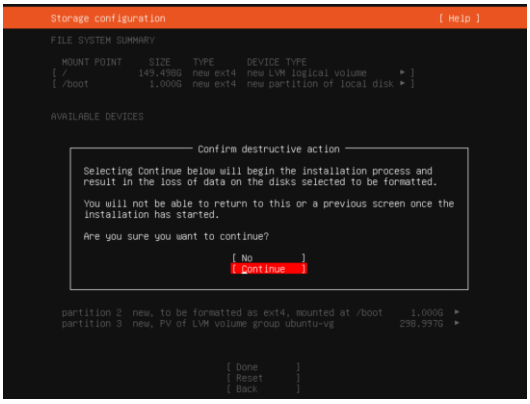


Step 14: Using the Tab key fill your user details, select Done and confirm with Enter

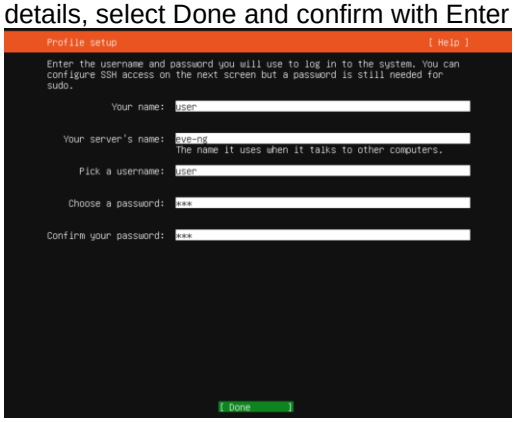


Step 15: IMPORTANT: Using Spacebar key select “Install SSH OpenSSH server. Using the Tab key select “Done” and confirm with Enter

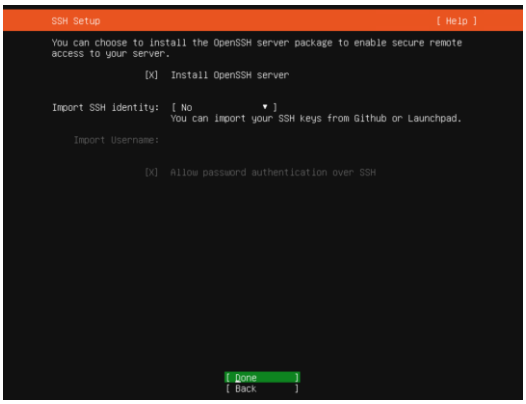


Step 16: Using Tab key select Done and confirm with Enter

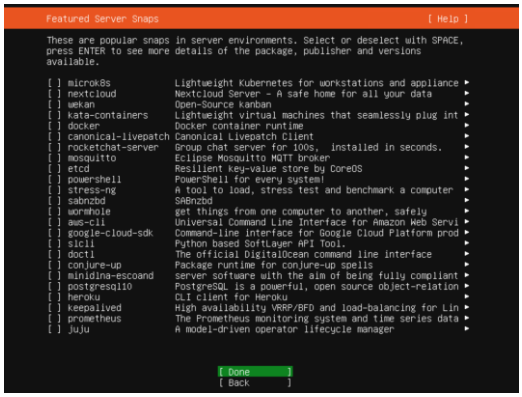

Step 17: Wait till your server finish Ubuntu install. Using Tab key select Reboot Now and confirm with Enter

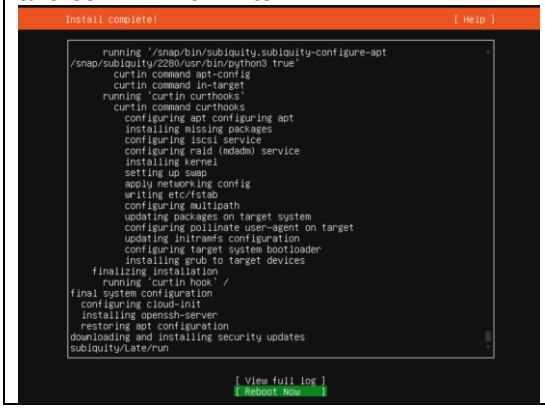

Step 18: Remove your installation media from server and confirm with Enter

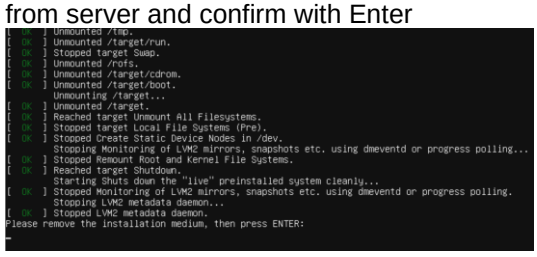


© EVE-NG LTD

Step 19: Use your previously created username and password to login in server. Example in this how steps was user/eve




Step 20: Login in the server as root:

```
sudo su
[sudo] password for user: eve
```



Step 21: Create root user password.

```
passwd root
Enter new UNIX password: eve
Retype new UNIX password: eve
```



Step 22: Allow SSH access for root user.

```
nano /etc/ssh/sshd_config
```

Navigate with arrow down key to uncomment
`PermitRootLogin prohibit-password`
Change to
`PermitRootLogin yes`

To save edited sshd_config use keys combo:
[Ctrl]+[o] Letter o (oscar)
Enter
[Ctrl]+[x] Letter x (x-ray) for exit



Step 23: Restart SSH service on the server.

```
service sshd restart
```

Step 24. IMPORTANT: expand your server LVM partition to use all size of the HDD volume. Use Putty or other native terminal access as root to the server:

```
apt clean
```

```
lvextend -l +100%FREE /dev/ubuntu-vg/ubuntu-lv
```

© EVE-NG LTD

```
resize2fs /dev/ubuntu-vg/ubuntu-lv
```

```
root@eve-ng:~#
root@eve-ng:~# lvextend -l +100%FREE /dev/ubuntu-vg/ubuntu-lv
  Size of logical volume ubuntu-vg/ubuntu-lv changed from 149.50 GiB (38272 extents) to <299.00 GiB (76543 extents).
  Logical volume ubuntu-vg/ubuntu-lv successfully resized.
root@eve-ng:~# resize2fs /dev/ubuntu-vg/ubuntu-lv
resize2fs 1.44.1 (24-Mar-2018)
Filesystem at /dev/ubuntu-vg/ubuntu-lv is mounted on /; on-line resizing required
old_desc_blocks = 19, new_desc_blocks = 38
The filesystem on /dev/ubuntu-vg/ubuntu-lv is now 78380032 (4k) blocks long.

root@eve-ng:~#
```

```
root@eve-ng:~# df -h
Filesystem                  Size  Used Avail Use% Mounted on
udev                        7.9G     0  7.9G   0% /dev
tmpfs                       1.6G   11M  1.6G   1% /run
/dev/mapper/ubuntu--vg-ubuntu--lv  294G  9.7G  271G   4% /
tmpfs                       7.9G     0  7.9G   0% /dev/shm
tmpfs                       5.0M     0  5.0M   0% /run/lock
tmpfs                       7.9G     0  7.9G   0% /sys/fs/cgroup
/dev/sda2                   976M  159M  750M  18% /boot
tmpfs                       1.6G     0  1.6G   0% /run/user/0
root@eve-ng:~#
```

Step 25: IMPORTANT: Edit network interface name

```
nano /etc/netplan/00-installer-config.yaml
```

change interface name “ensXXX” to “eth0”

To save edited 00-installer-config.yaml use keys combo:
[Ctrl]+[o] Letter o (oscar)
Enter
[Ctrl]+[x] Letter x (x-ray) for exit

Before:

```
# This is the network config written by 'subiquity'
network:
  ethernets:
    ens160:
      addresses:
      - 192.168.90.44/24
      gateway4: 192.168.90.1
      nameservers:
        addresses:
        - 8.8.8.8
        - 8.8.4.4
        search: []
  version: 2
```

After:

```
# This is the network config written by 'subiquity'
network:
  ethernets:
    eth0:
      addresses:
      - 192.168.90.44/24
      gateway4: 192.168.90.1
      nameservers:
        addresses:
        - 8.8.8.8
        - 8.8.4.4
        search: []
  version: 2
```

Step 26: Update interface names with single line command:

```
sed -i -e 's/GRUB_CMDLINE_LINUX_DEFAULT=.*/GRUB_CMDLINE_LINUX_DEFAULT="net.ifnames=0
noquiet"/' /etc/default/grub
```

Step 27: Update GRUB

```
update-grub
```

Step 28: Reboot your server

```
reboot
```

Step 29: use Putty or other SSH terminal, login in your Server as root. Run update and upgrade commands

```
apt update
```

```
apt upgrade

Confirm “y”
```

3.3.2 EVE Professional Installation Phase 2

Step 30: Launch EVE-PRO Internet installation



© EVE-NG LTD

```
wget -O - https://www.eve-ng.net/repo-bionic/install-eve-pro.sh | bash -i
```

Verification: Verify your EVE-NG server installation, type “dpkg -l eve-ng-pro” command, it must display latest EVE Pro version

```
root@eve-ng:~# dpkg -l eve-ng-pro
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                                          Version                   Architecture
Description
+++-=====================================-======================-======================-
================================================================================
ii  eve-ng-pro                            4.0.1-3                 amd64                    A
new generation software for networking labs.
root@eve-ng:~#
```

Step 31: After the installation is completed, **reboot EVE** and login as root first time: root/eve. Follow the Management IP setup instructions in section **3.5.1**. It is strongly recommended for bare-metal installations to use a static IP address. After the IP address setup, continue with Step 32	Step 32: After your EVE is rebooted,
	
	Login to the EVE CLI and type:
	
	`apt update`
	`apt upgrade`
	Follow steps in section: **5.1**, **5.2**

Step 33: After update, Step 32 is completed, continue with type:
 	
`apt install eve-ng-dockers`
This can take some time depending on your Internet connection and disk speed.
 	
Your output after install must look like:
 	
 
 	
`dc images`
	Step 34: (Optional) If after dockers first install (Step 33) in the output “dc images” you still seeing some docker name in the list as <none>,
	 
	
	please run the command:
	`apt install --reinstall eve-ng-dockers`
	
	NOTE: If you are installing EVE in the locked environment and cannot install dockers online, please contact with us: info@eve-ng.net for offline dockers installation option.

Step 35: Continue to section **4** to obtain your EVE-NG Professional license	


⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section **17**

© EVE-NG LTD

3.4 Google Cloud Platform

3.4.1 Google account

Step 1: Connect to Google Cloud Platform (GCP
https://console.cloud.google.com/getting-started

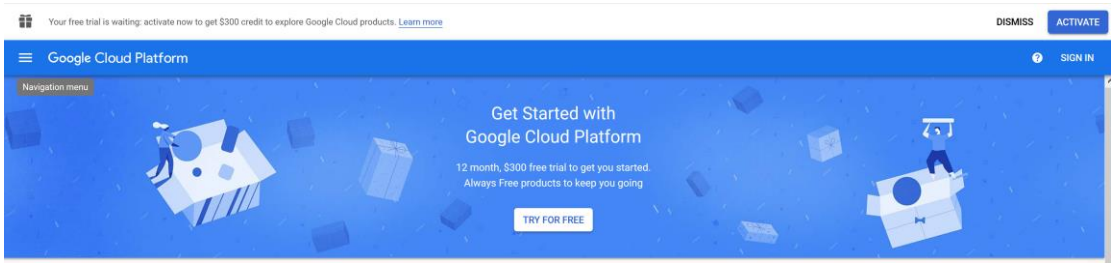


Step 2: Sign into GCP. Create a new GCP account if you do not already have one.


3.4.2 Goggle Cloud project

Create new project. By default, GCP will offer you a project named “My First Project”. It can be used as well.

Step 1. GCP top bar, click on “My First Project”




Step 2. Next pop up window, click “NEW PROJECT”

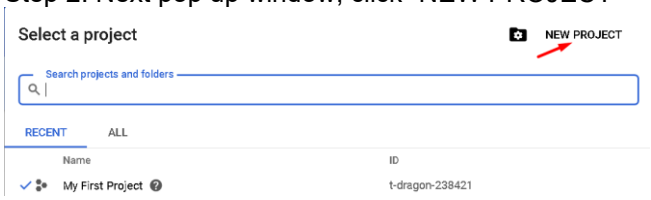


Step 3. Enter your project name, and confirm “CREATE”

© EVE-NG LTD

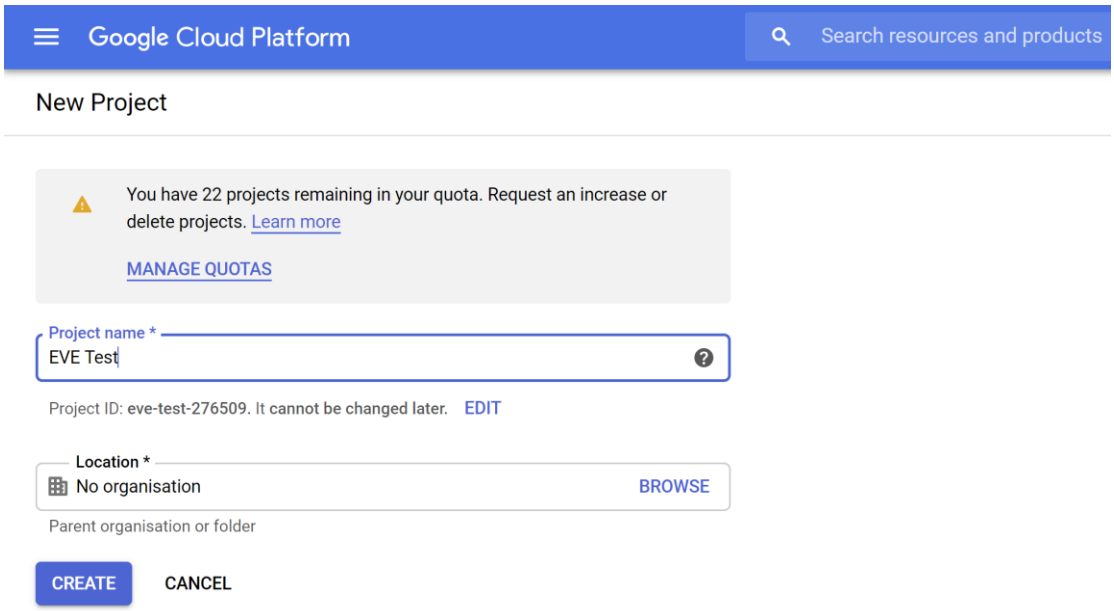


This will take some time.

Step 4. Navigate: Navigation Menu/Compute Engine/VM Instances

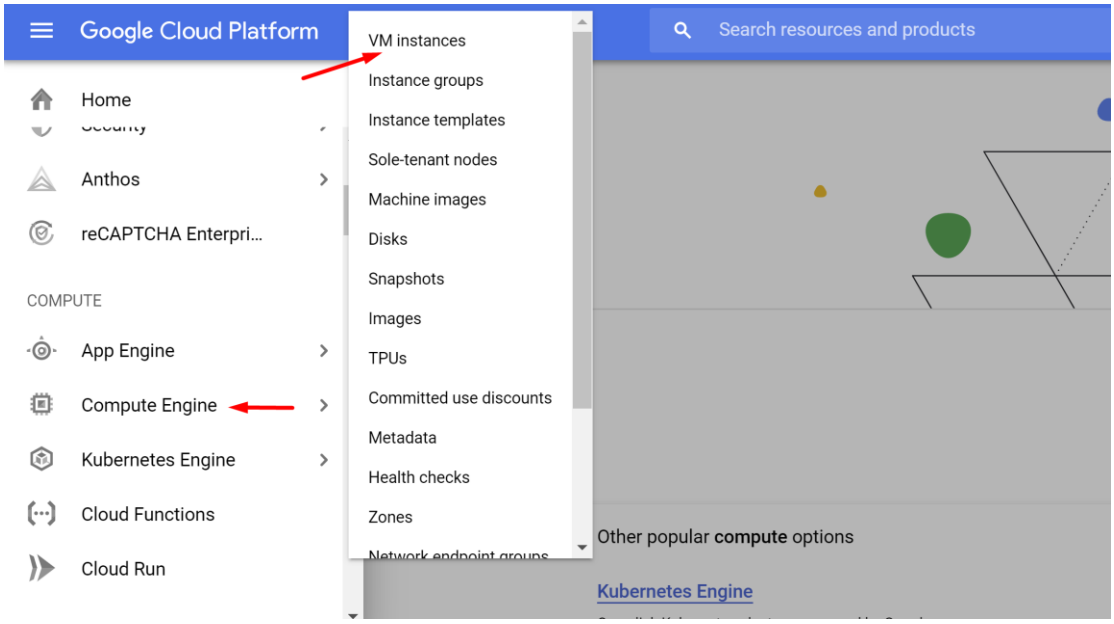


Step 5. Navigate: top bar and select your newly created Project

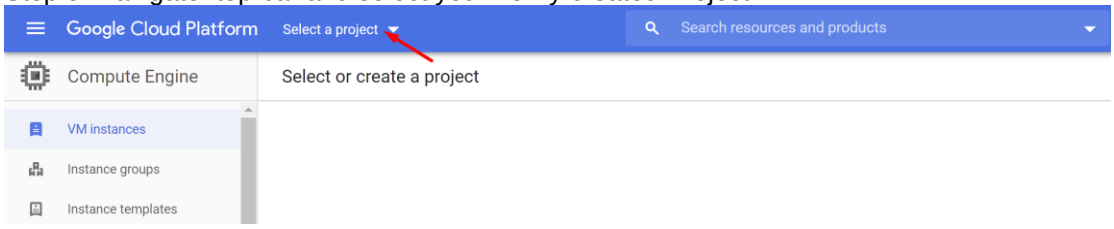


Preparation of your Project can take some time. Wait until the VM Instance window finishes deployment and then press the “Create button.”

© EVE-NG LTD

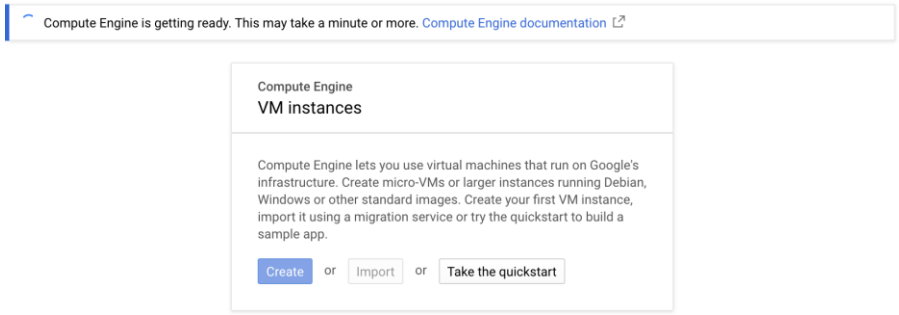


3.4.3 Preparing Ubuntu boot disk template

Step 1: Open the google cloud shell and press: “START CLOUD SHELL”

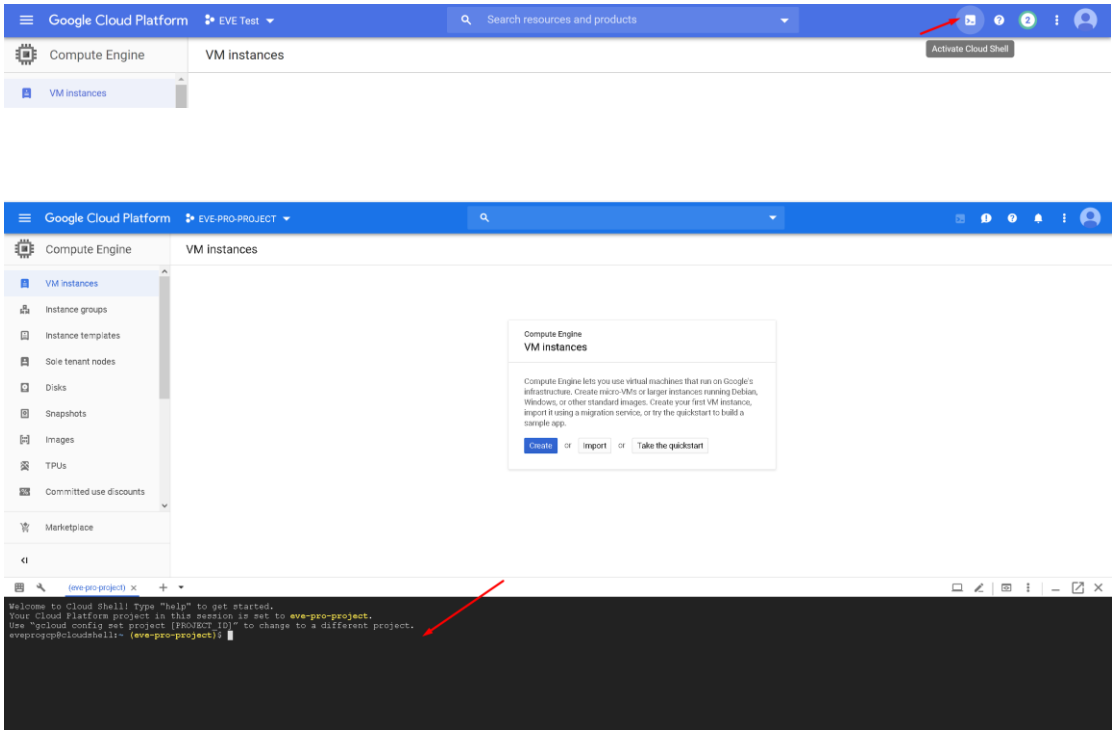


Step 2: create a nested Ubuntu 18.04 image model. Copy and paste the below command into the shell. Use copy/paste. crtl +c/ctrl +v. **It is single line command (copy all command below in cli)**. Confirm with “enter”:

```
gcloud compute images create nested-ubuntu-bionic --source-image-
family=ubuntu-1804-lts --source-image-project=ubuntu-os-cloud --
licenses https://www.googleapis.com/compute/v1/projects/vm-
options/global/licenses/enable-vmx
```

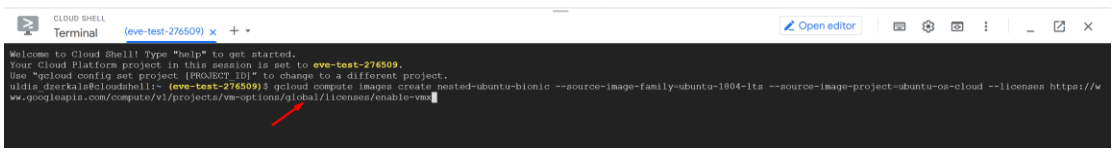


© EVE-NG LTD

You will get the following output when your image is ready:

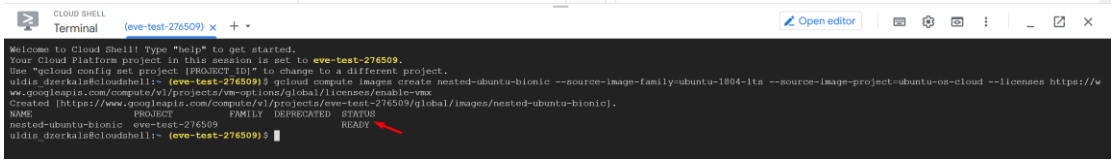

3.4.4 Creating VM

Step 1: Navigate: Navigation Menu/Compute Engine/VM Instances and press “Create”

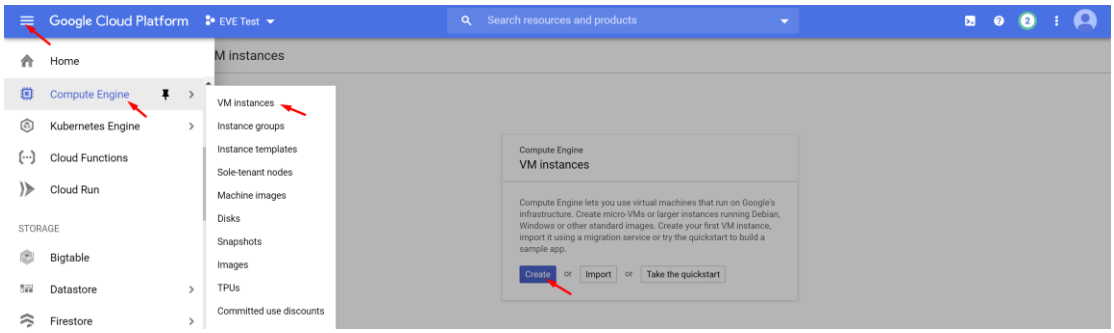


Step 2: Assign the name for your VM

Step 3: Set your own region and zone

Step 4: Edit your Machine Configuration. General-Purpose. Choose the series of CPU platform, Use ***Intel CPUs Skylake or Cascade***.

Step 5: Choose your desirable CPU and RAM settings.
IMPORTANT: “Deploy a container image” must be UNCHECKED.

© EVE-NG LTD

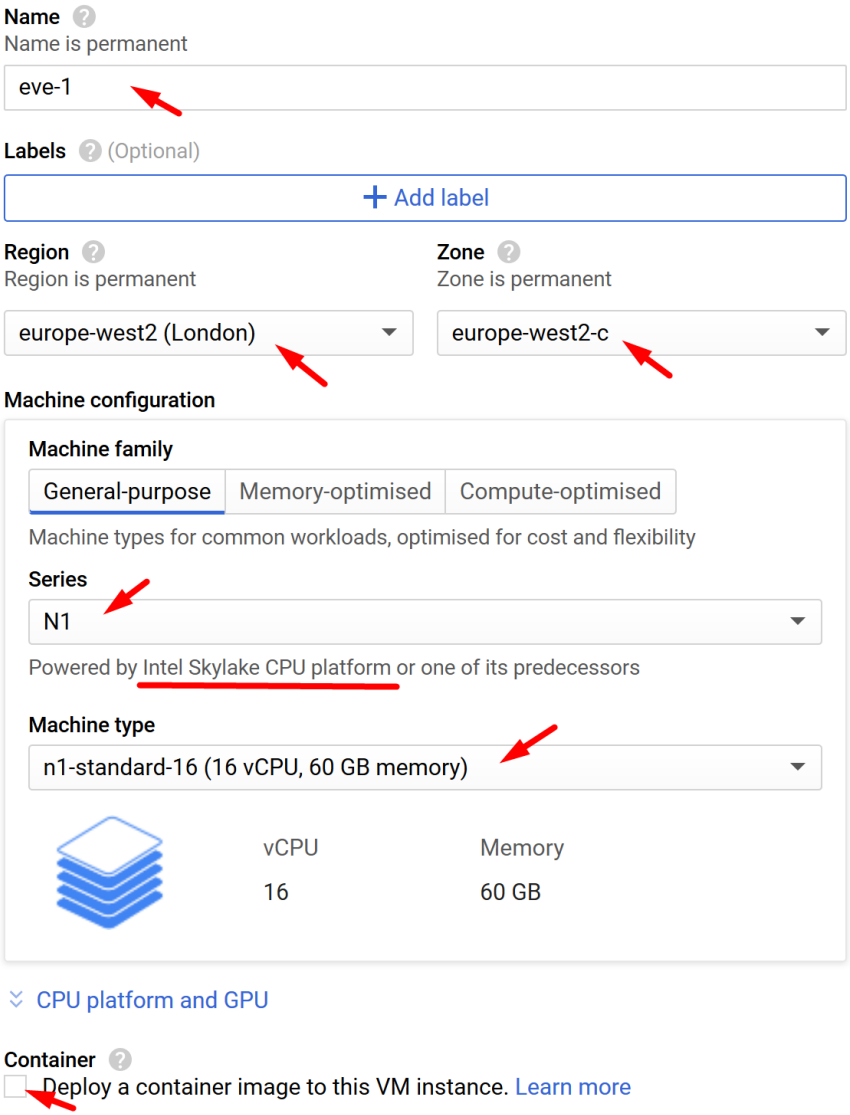


Step 6: Select Boot disk. Press Change




Step 7. Select Custom images and the ***custom boot image you created previously***. Choose HDD disk type and size. HDD size can vary depends of your needs.

© EVE-NG LTD

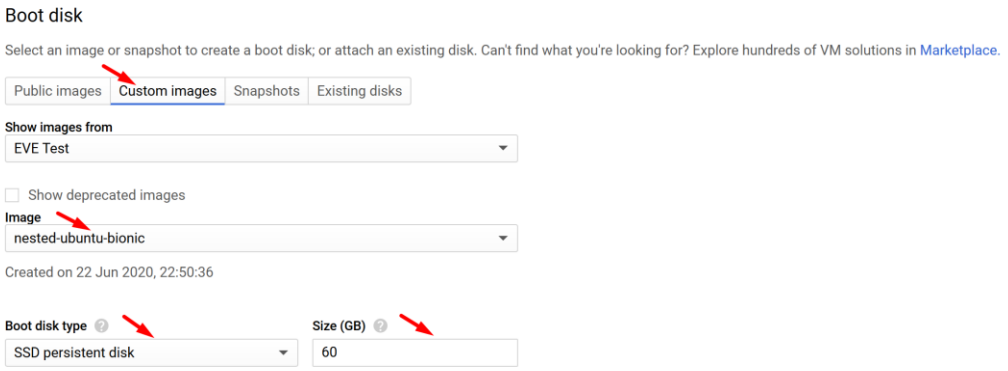


Step 7: Allow https traffic and create VM

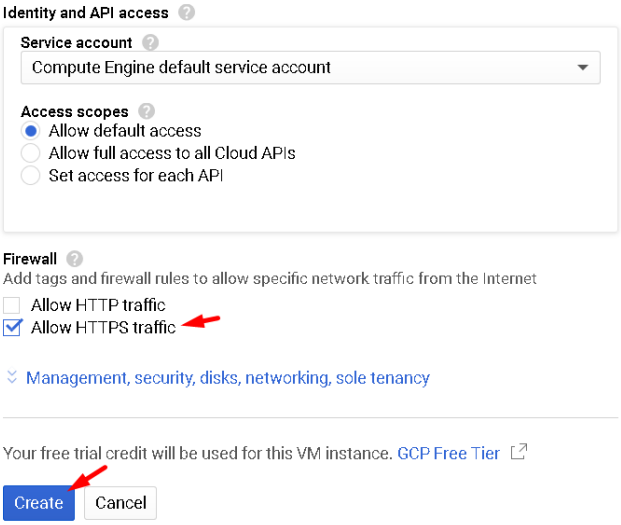

3.4.5 EVE-NG-PRO installation

Step 1: Connect to the VM with the first option “Open in browser window”



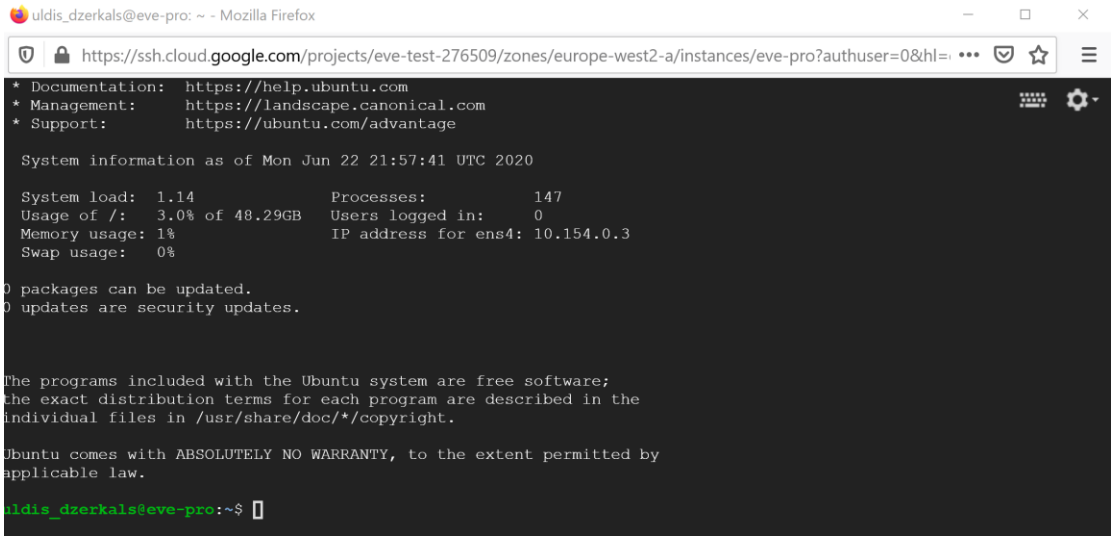

Step 2: Launch installation with:

Type the below command to become root:

```
sudo -i
```

Start EVE-PRO installation

```
wget -O - https://www.eve-ng.net/repo-bionic/install-eve-pro.sh | bash -i
```


Step 3: Update and upgrade your new EVE-PRO

```
apt update
```

```
apt upgrade
```

Confirm with Y


Step 4. Reboot EVE. Allow some time for reboot and then press “Reconnect”

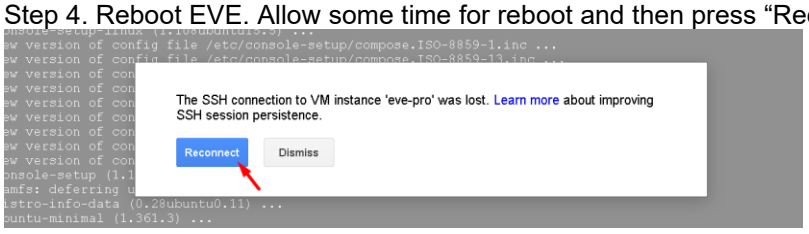

Step 5: VERY IMPORTANT: Setup IP

Once the IP wizard screen appears, press ctrl +c and type the below command to become root:

```
sudo -i
```

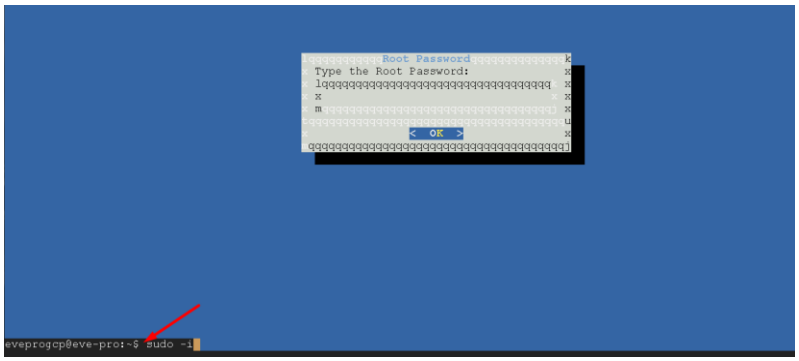

© EVE-NG LTD


Now follow the IP setup wizard, section: 3.5.2.
IMPORTANT: set IP as DHCP!

Step 6: Dockers installation. After EVE is rebooted, reconnect the SSH session:

Type command to become root:
```
sudo -i
```

Type command to update EVE
```
apt update
```


Type command to Install Dockers
```
apt install eve-ng-dockers
```



3.4.6 Access to Google Cloud EVE-PRO

Use your public IP for accessing EVE via https.



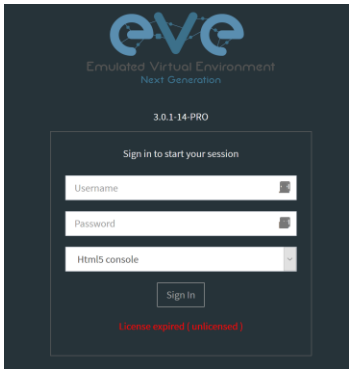


Default web login: admin/eve


3.4.7 Optional: GCP Firewall rules for native console use

Step 1: Navigate: Navigation menu/VPC Network/Firewall rules

© EVE-NG LTD

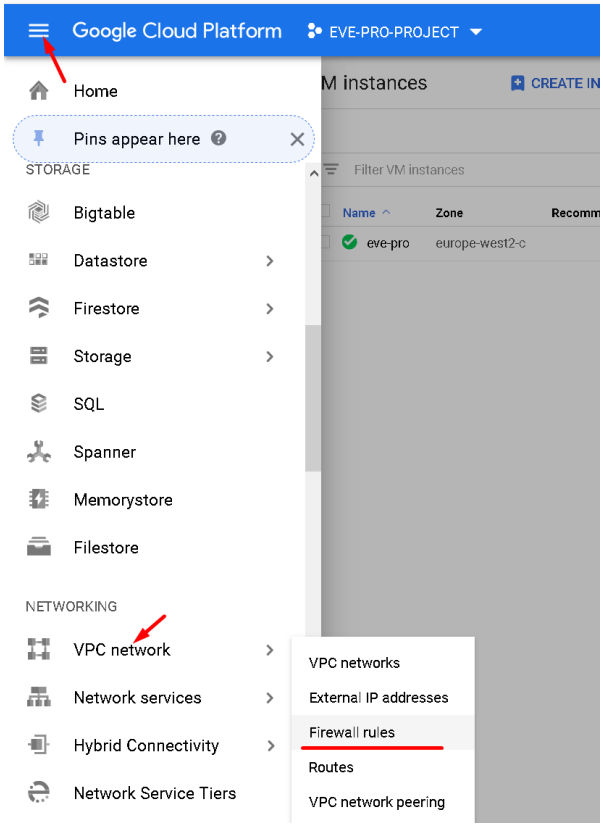


Step 2: Create new firewall rule

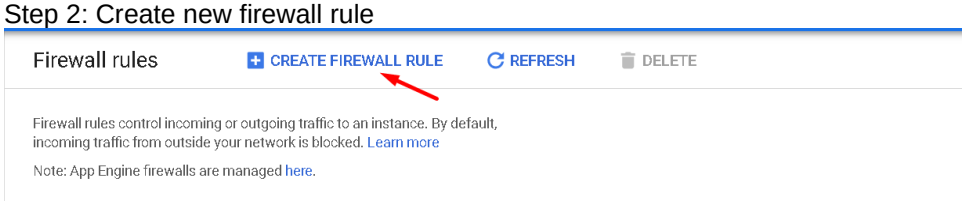


Step 3: Create an ingress FW rule; allow TCP ports 0-65535




© EVE-NG LTD

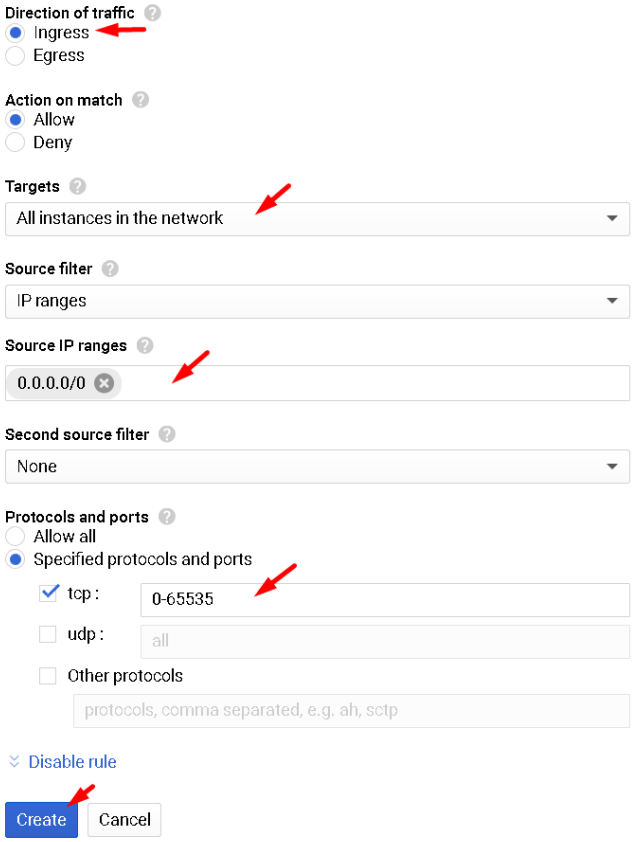

Step 4: Create an egress FW rule; allow TCP ports 0-65535

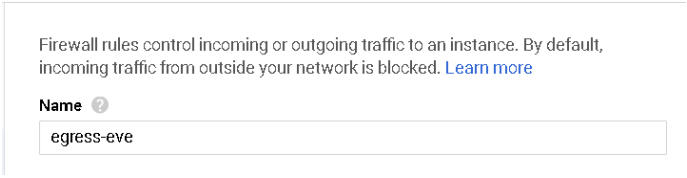

© EVE-NG LTD

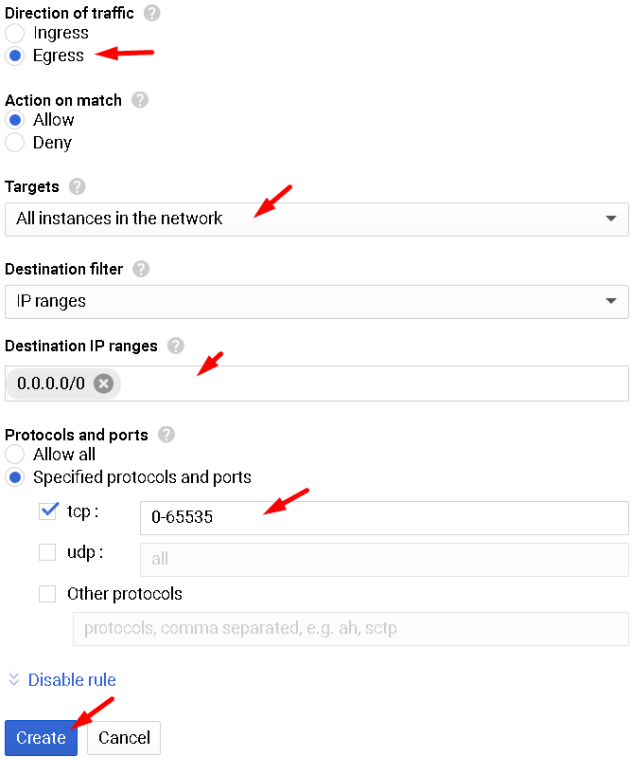

Summary FW rules.

Name	Type	Targets	Filters	Protocols / ports	Action	Priority	Network
egress-eve	Egress	Apply to all	IP ranges: 0.0.0.0/0	tcp:0-65535	Allow	1000	default
default-allow-https	Ingress	https-server	IP ranges: 0.0.0.0/0	tcp:443	Allow	1000	default
ingress-eve	Ingress	Apply to all	IP ranges: 0.0.0.0/0	tcp:0-65535	Allow	1000	default

3.5 EVE Management IP Address setup


3.5.1 Management static IP address setup (preferred)


⚠ IMPORTANT NOTE: EVE Docker stations for html console access are using network 172.17.0.0/16. Please avoid use this network on the EVE management or other clouds or interfaces.

The steps below will walk you through the network setup and assign a static management IP for EVE.


Step 1: Log into the EVE CLI using the default login **root/eve** After login, type your preferred root password for EVE, default is **eve. Remember it for further use.** Confirm with enter NOTE: Typed characters in the password field are not visible.	Step 2: Retype your root password again and confirm with enter.

© EVE-NG LTD

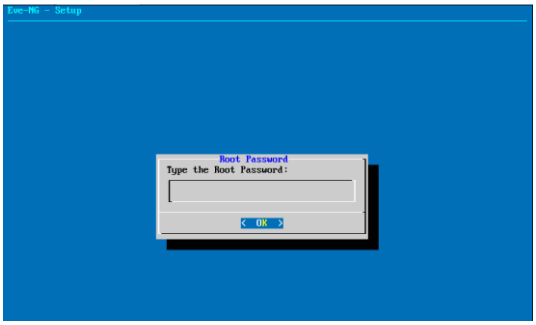


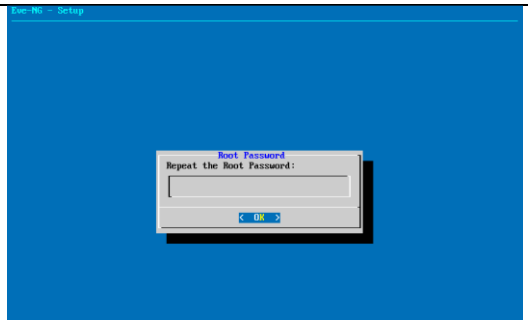


Step 3: Choose your EVE VMs hostname. By default, it is **eve-ng**. You can leave it as it is. Confirm with enter

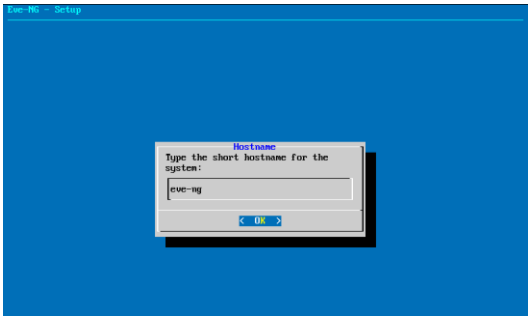


Step 4: Type your domain name for your EVE VM. By default, it is example.com. The default value can be used as well. Confirm with enter

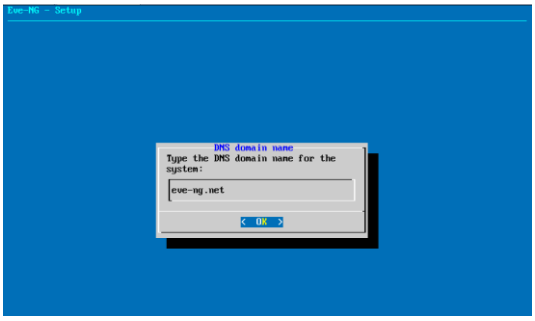






Step 5: Using the arrow keys, select the option “static”, confirm your selection with the space key, followed by enter

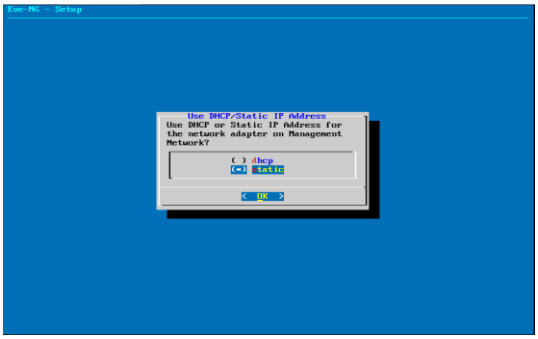


Step 6: Type your desirable EVE management IP. Confirm with enter.

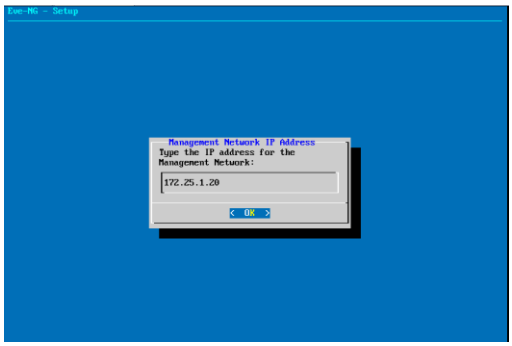

© EVE-NG LTD

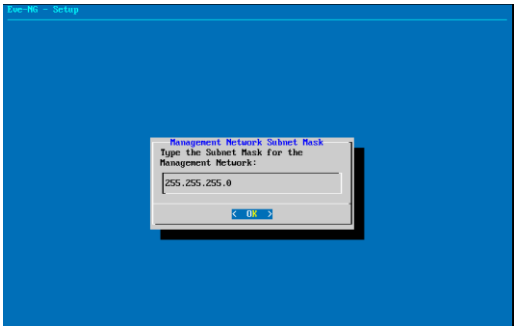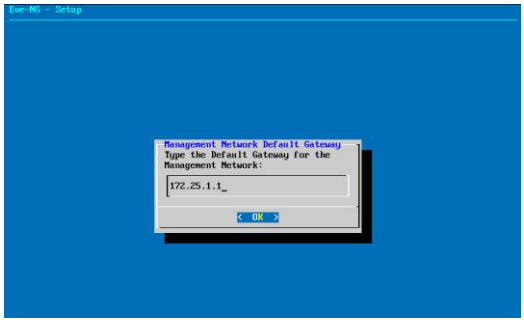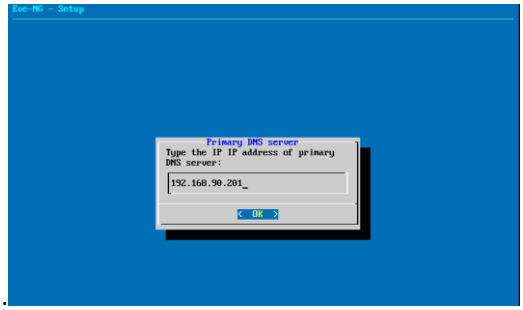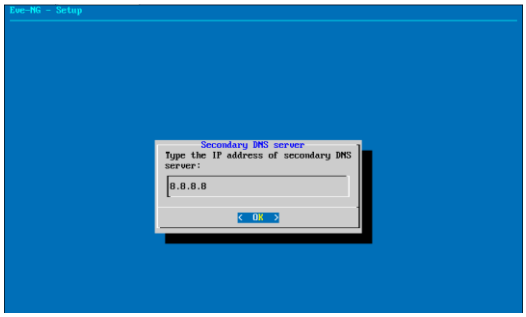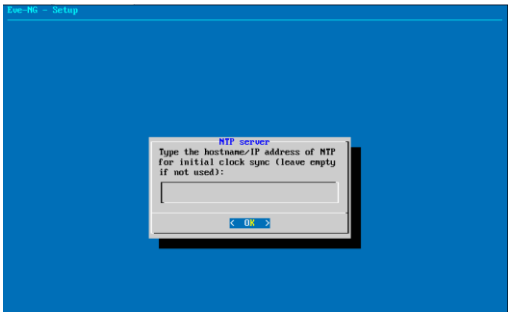Step 7: Type the subnet mask of your EVE management network. Confirm with enter. 	Step 8: Type your networks gateway IP. Confirm with enter. 
Step 9: Type your networks primary DNS IP. Confirm with enter. IMPORTANT: DNS must be reachable and resolve public addresses. 	Step 10: Type your network Secondary DNS IP. Confirm with Enter. IMPORTANT: DNS must be reachable and resolve public addresses. 
Step 11: Type your preferred NTP server IP. It can be left empty as well; in this case, your EVE VM will automatically assign the time from its host. 	Step 12: **Skip this step.** By default, it is set to direct connection (no proxy). Confirm selection with enter. EVE will reboot automatically. ⚠ **NOTE:** If required, the Proxy settings can be configured later using EVE WEB GUI System/System Settings described in section **3.5.3**

© EVE-NG LTD


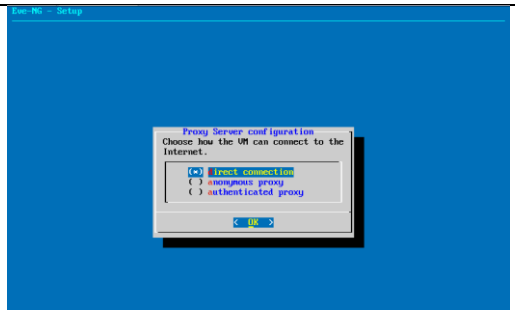
	

IMPORTANT NOTE: If you are setting up your management IP for the first time (fresh EVE installation), please return to the install section and complete installation Phase 3.

3.5.2 EVE Management IP address setup via DHCP


IMPORTANT NOTE: EVE Docker stations for html console access are using network 172.17.0.0/16. Please avoid use this network on the EVE management or other clouds or interfaces.


The steps below will walk you through the network setup and assign a management IP for EVE via DHCP.

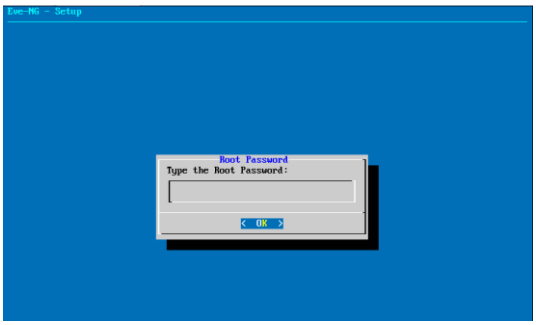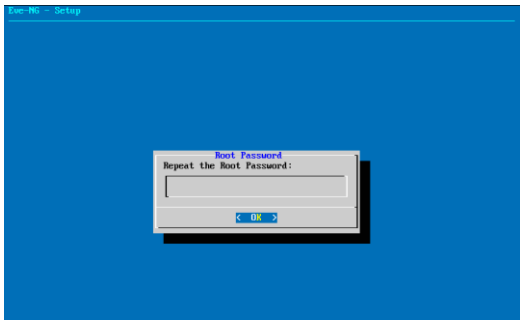Step 1: Log into the EVE CLI using the default login **root/eve** After login, type your preferred root password for EVE, default is **eve. Remember it for further use.** Confirm with enter NOTE: Typed characters in the password field are not visible. 	Step 2: Retype your root password again and confirm with enter. 


Step 3: Choose your EVE VMs hostname. By default, it is **eve-ng**. You can leave it as it is. Confirm with enter	Step 4: Type your domain name for your EVE VM. By default, it is example.com. The default value can be used as well. Confirm with enter

© EVE-NG LTD

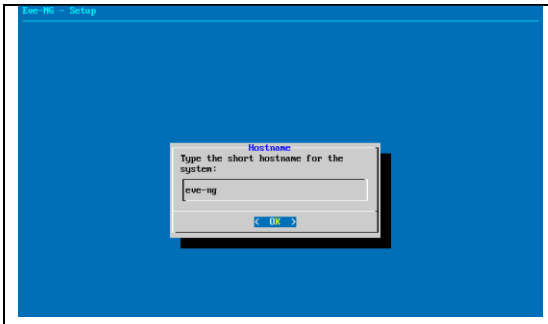


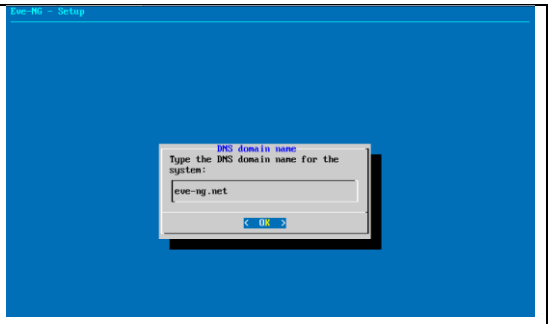

Step 5: Using the arrow keys, select the option “dhcp”, confirm your selection with the space key, followed by enter

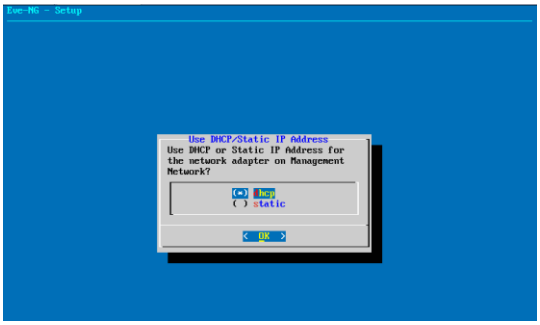


Step 6: Type your preferred NTP server IP. It can be left empty as well; in this case, your EVE VM will automatically assign the time from its host.

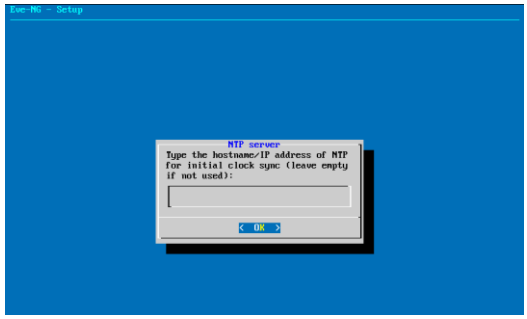

Step 7: **Skip this step.** By default, it is set to direct connection (no proxy).

Confirm selection with enter. EVE will reboot automatically.

⚠ **NOTE:** If required, the Proxy settings can be configured later using EVE WEB GUI System/System Settings described in section **3.5.3**

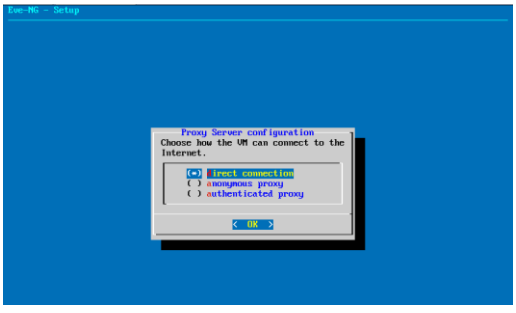

© EVE-NG LTD


⚠ **IMPORTANT NOTE:** If you are setting up your management IP for the first time (fresh EVE installation), please return to the install section and complete installation Phase 3.

3.5.3 Internet proxy setup


Step 1: If you have a proxy in use for your Internet, login into your EVE WEB GUI using your EVE IP https://aaa.aaa.aaa.aaa

Default username: admin
Password: eve

Step 2: Select Tab: System/System Settings

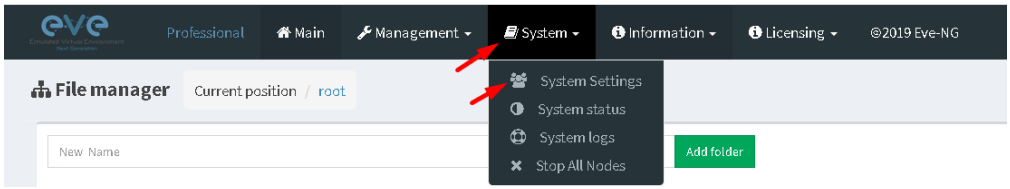

Step 3: Enter your Proxy IP and Port following by “Submit”. For authenticated Proxy, use your username and password.

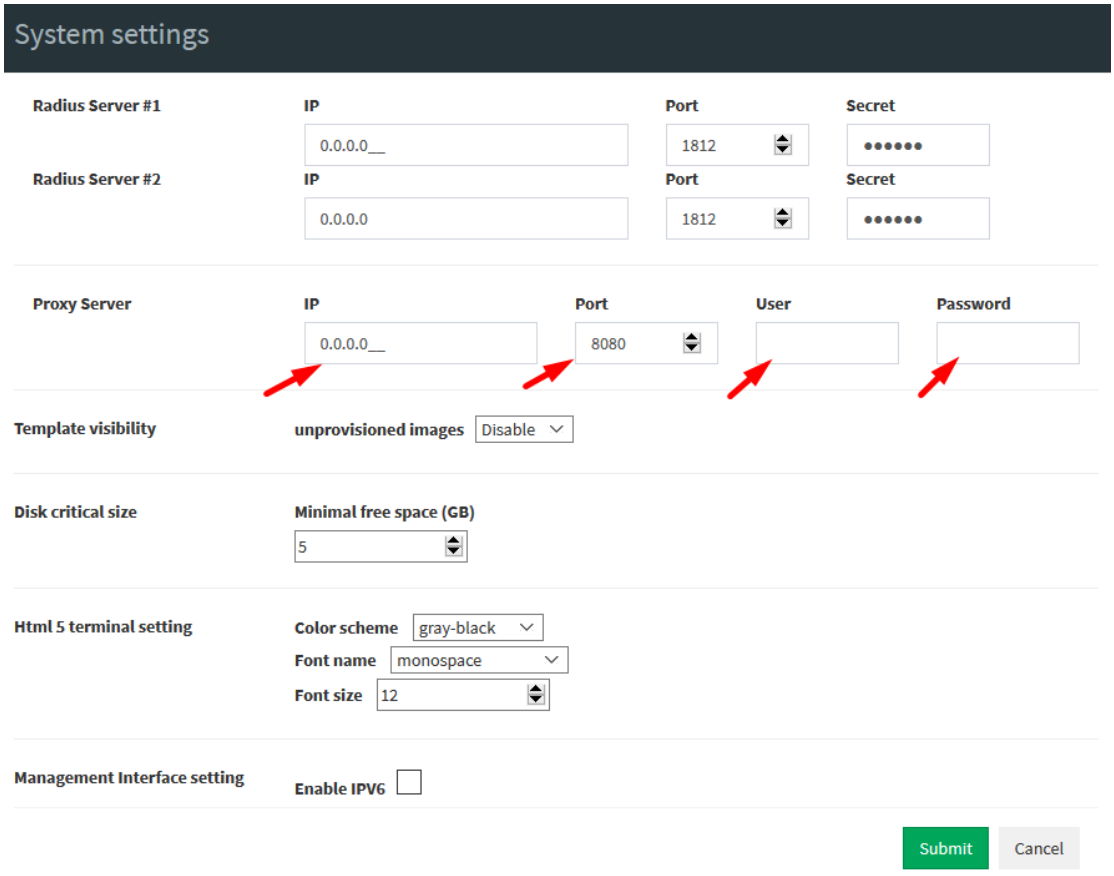

© EVE-NG LTD

3.5.4 EVE Management IP address reset

If for any reason you need to change these settings after the installation, you can rerun the IP setup wizard. Type the following command in the CLI and hit enter:

```
rm -f /opt/ovf/.configured
```

Then type:

```
su -
```

Once you log into the CLI again, EVE will go through the network setup again. Please follow the steps in section **3.5.1** for Static IP or **3.5.2** for DHCP IP.

3.6 Native telnet console management setup

If you prefer to use a natively installed telnet client to manage nodes inside EVE, follow the steps below:

3.6.1 Windows Native Console


Step 1: Download the EVE Windows Client integration pack:

http://www.eve-ng.net/downloads/windows-client-side-pack

Step 2: Install it as administrator




Step 3: Leave the option for UltraVNC checked. UltraVNC is very tiny and the preferred VNC client for Windows by EVE.

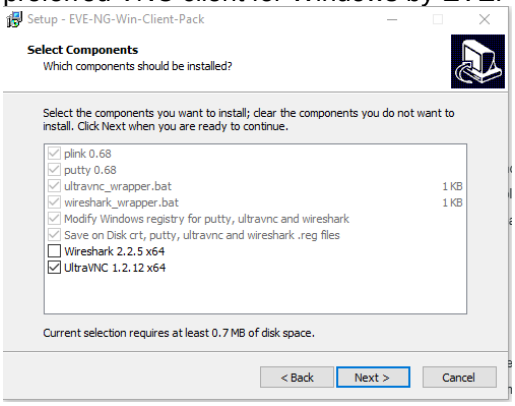

NOTE: The Wireshark option for EVE Professional is left unchecked, because Wireshark is already integrated into EVE PRO.

Step 4: Continue with Next. When it asks to choose Ultra VNC Options, only leave the UltraVNC Viewer checked, the rest is not needed.

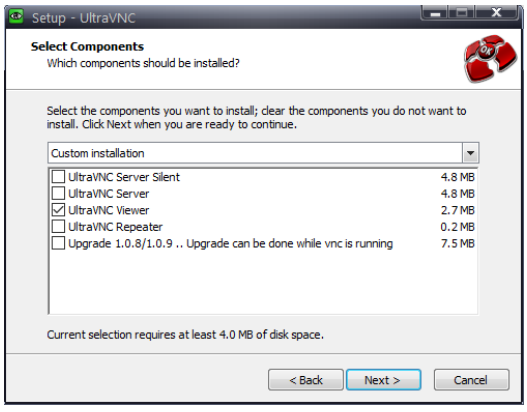

© EVE-NG LTD

Step 5: Continue with Next and finish the installation.	

By default, EVE Windows Client Integration will install **Putty** as your Telnet Client. The default location for the EVE Windows Client Integration software and .reg files is: “C:\Program Files\EVE-NG”

Set the default telnet program manually in Windows 10. Example: SecureCRT


Step 1: Go to: Windows Settings/Apps/Default Apps/Choose Default Apps by Protocol

Step 2: Set your default Telnet program:



⚠ NOTE: The first time click on the type of link that is used to access a running node inside EVE via telnet, the browser will ask to choose the telnet program. If you have prepared your default telnet program with the instructions above, you have to choose your default Telnet program.

Example: Firefox browser:

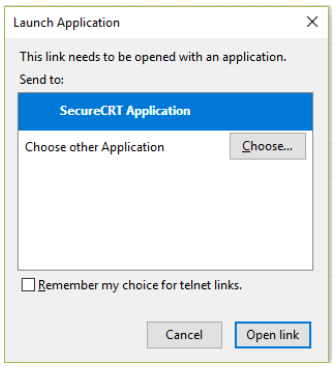

Set your default application, check the box “Remember my choice telnet links” and click Open link

3.6.2 Linux Native Console

The steps below will show how to setup the native consoles pack for Linux Mint 18 (Ubuntu):

Step 1: Go to the EVE Linux Side integration pack download page: http://www.eve-ng.net/downloads/linux-client-side	Step 2: Open the link to GitHub https://github.com/SmartFinn/eve-ng-integration
Step 3: Scroll down to the installation part	

© EVE-NG LTD



Step 4: Login as root to your Linux system and enter the commands below:

NOTE: An internet connection is required. Enter each command line below one after the other

```
sudo add-apt-repository ppa:smartfinn/eve-ng-integration
sudo apt-get update
sudo apt-get install eve-ng-integration
```

⚠ For other Linux native console setup options please refer to:
https://github.com/SmartFinn/eve-ng-integration

3.6.3 MAC OSX Native Console

Download the EVE MAC OSX Client integration pack and install it:

https://www.eve-ng.net/index.php/download/#DL-OSX

3.7 Login to the EVE WEB GUI

EVE PRO is using https 443. Login to the EVE management UI:

https://<your_eve_ip>/

Default user access:

User: admin

Password: eve

⚠ NOTE: You can change your EVE Admin password, please refer to section **7.3.1.2**

⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section **17**


© EVE-NG LTD

4 EVE-NG Professional Licensing


EVE-NG Professional and Learning Centre editions require purchasing and uploading a license to activate its features. Licenses are based on an annual subscription.

EVE-NG permits up to **128 accounts** to be created but restricts the number of simultaneous sessions per role to the licensed amount. To increase the number of active sessions, please purchase additional licenses on top of the base license as shown below.

⚠ **Definition:** Simultaneous session (1 license) means one active connection to the EVE-NG Web GUI.

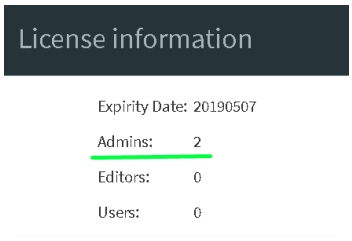


Example1 EVE-Professional: The license information page shows 2 Admin accounts. This means 2 Admin role-based accounts can be logged into the Web GUI simultaneously. If a third Admin account logs into the Web GUI, the first active Admin session will be disconnected. Please note that the first Admin's labs will keep running. EVE-NG PRO can have up to 128 accounts, but active sessions to the Web GUI are restricted to the number of purchased licenses.

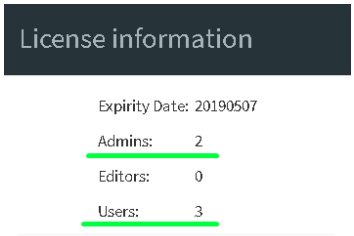

Example2 EVE Learning Centre: The license information page shows 2 Admin and 3 Lab-user role accounts. This means 2 Admin and 3 User accounts can be logged into the Web GUI simultaneously. If a fourth User account or third Admin account logs into the Web GUI, the first User or Admin session will be disconnected. Started labs will keep running. EVE-NG Learning Center can have up to 128 accounts, but active sessions to the Web GUI are restricted by the number of licenses purchased.

4.1 EVE-NG Professional Base license

EVE-NG Professional Edition - 1 Year License
https://www.eve-ng.net/index.php/buy/
EVE-NG PRO features multi user support and assigns all accounts as Administrators.
The license allows for 2 simultaneous users.

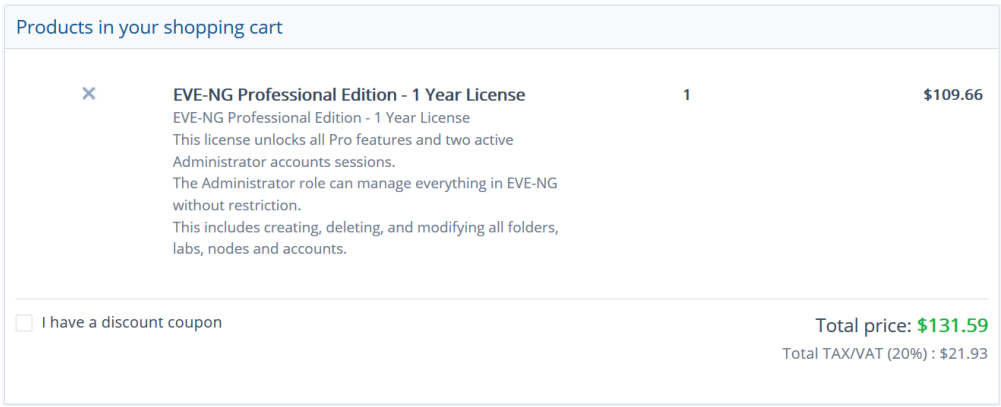


For EVE-PRO Administrator role permissions, please see section 4.4.

© EVE-NG LTD

4.2 EVE-NG Learning Centre licenses

EVE-NG Learning Centre Edition - 1 Year License
https://www.eve-ng.net/index.php/buy-corporate/
EVE-NG LC features multi user support and assigns accounts as Administrators, Lab-Editors or Lab-Users.
The first minimal Base A license allows for 2 simultaneous Admin users. It is necessary to use an Administrator account to create or manage EVE LC and other user's role-based accounts.

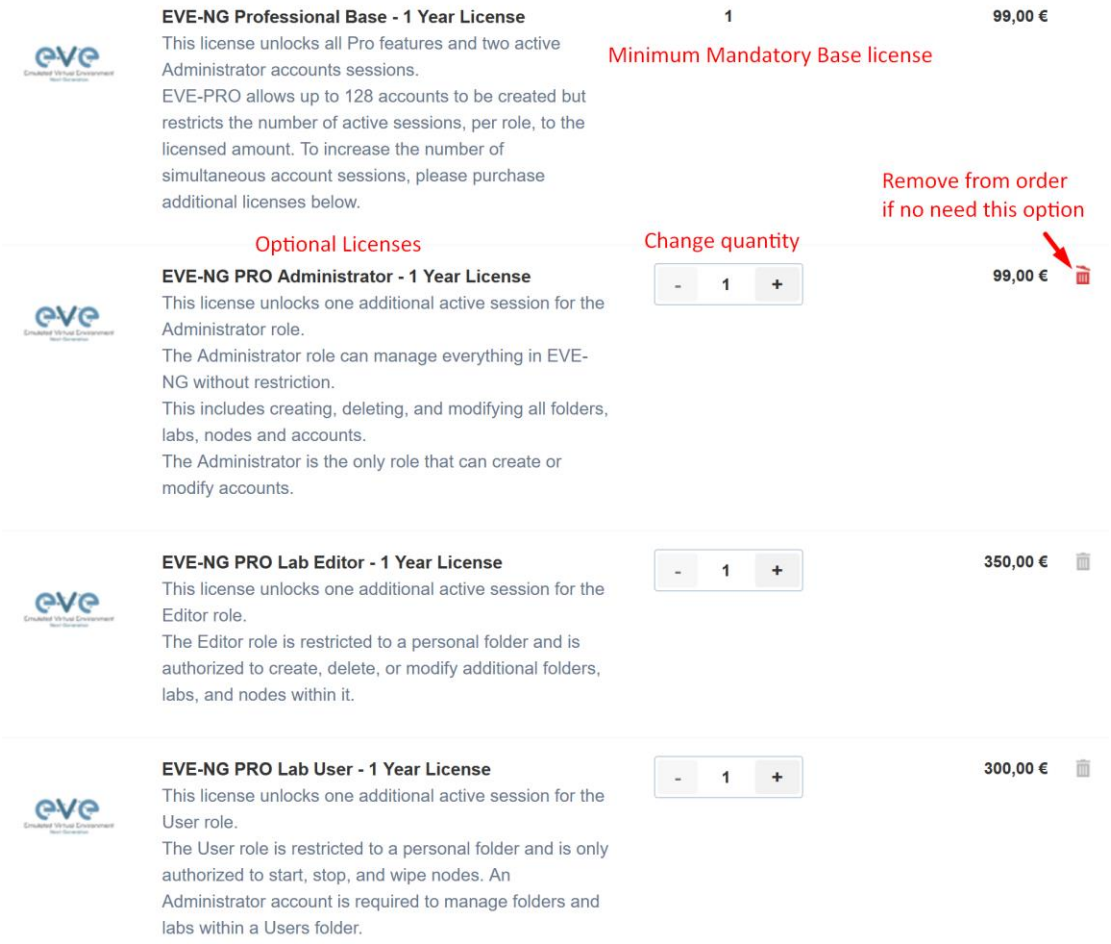

EVE-NG PRO – A Base License (Mandatory)

This license unlocks all Pro features and two active Administrator accounts sessions. This license is mandatory for EVE LC edition.

The following licenses below can vary per your needs.

EVE-NG PRO - Administrator License

This license unlocks one additional active session for the Administrator role.
The Administrator role can manage everything in EVE-NG without restrictions.
This includes creating, deleting, and modifying all folders, labs, nodes and accounts.
The Administrator is the only role that can create or modify accounts.

EVE-NG PRO – Lab-Editor License

© EVE-NG LTD


This license unlocks one additional active session for the Lab-Editor role.
The Lab-Editor role is restricted to a personal and the Shared folder and is authorized to create, delete, or modify additional folders, labs, and nodes within them.

EVE-NG PRO – Lab-User License

This license unlocks one additional active session for the Lab-User role.
The Lab-User role is restricted to a personal and the Shared folder and is only authorized to start, stop, and wipe nodes. An Administrator account is required to manage folders and labs within a User's personal folder.

Example: EVE Learning Centre Licensing for 1 Teacher and a 5 Students class.
Licence model below includes:

- Two administrator accounts, necessary for EVE LC labs and other user account management
- One Lab-Editor-role based account, assigned to the teacher to create/manage labs and assign them to the Shared folder for Students use. The Lab-Editor role is restricted to a personal folder and is authorized to create, delete, or modify additional folders, labs, and nodes within it.
  Optional: If wanted / needed, the Lab-Editor account for the teacher can also be replaced by an Administrator account instead.
- Five Lab-User role-based Student accounts allowing running a class with 5 simultaneous students connected to the EVE HTML GUI.

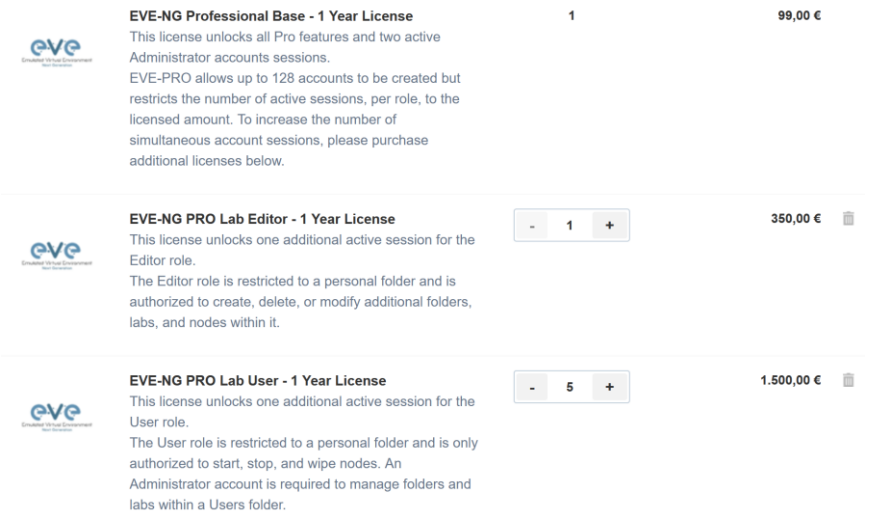

For EVE-LC role permissions, please see section **4.4**.

4.3 EVE-NG Corporate licenses

Essentially, this is EVE Learning Centre edition with Lab-Editor role-based accounts only. This is recommended for corporate use to allow full permissions for EVE labs but to restrict being able to manage other user accounts or labs. The Lab-Editor role is restricted to a shared and a personal folder and has permissions to create, delete, or modify additional folders, labs, and nodes within them.

EVE-NG Learning Centre Edition - 1 Year License
https://www.eve-ng.net/index.php/buy-corporate/
EVE-NG Corporate features multi user support and assigns accounts as Administrators or Lab-Editors.
The first (mandatory) Base A license allows for 2 simultaneous Admin users. It is necessary


© EVE-NG LTD

to have an Administrator account to create or manage EVE LC and other user's role-based accounts.

Example: EVE Corporate Licensing for 5 Lab-Editor users.
License model below includes:

- Two administrator accounts necessary for EVE Corporate labs and other user accounts management (Mandatory Base license)

- Five Lab-Editor role-based accounts. The Lab-Editor role is restricted to a shared and a personal folder and has permissions to create, delete, or modify additional folders, labs, and nodes within them.

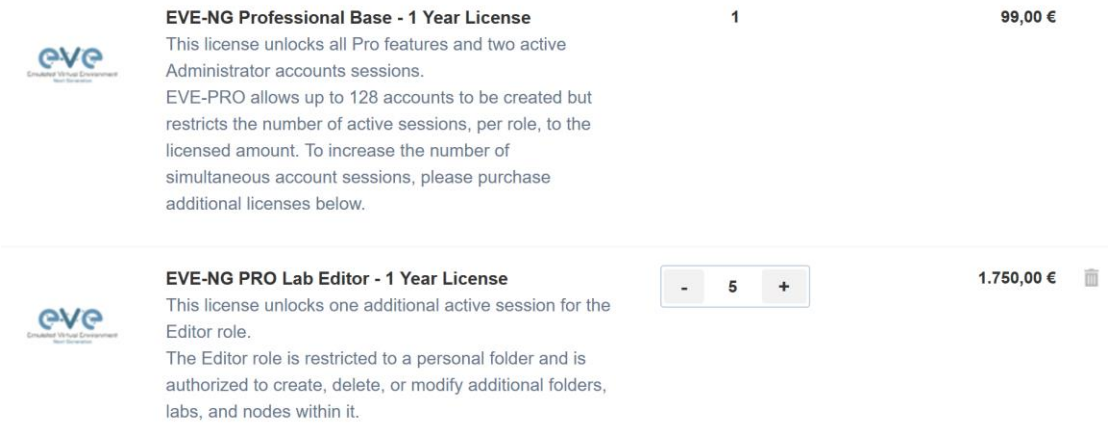

EVE Corporate role rights, please follow section **4.4**.

4.4 User roles comparison chart

Feature	Administrator Role	Lab-Editor/Teacher role	Lab-User/Student role
User accounts management	yes	no	no
User Accounts visibility	yes	no	no
User edit modal visibility	yes	no	no
User Folder's management	yes	no	no
Full EVE root folder tree access	yes	no	no
Licencing module access	yes	no	no
Nodes management module access	yes	yes (only own running nodes)	yes (only own running nodes)
Lab management module access	yes	yes (only own running nodes)	yes (only own running nodes)
Shared lab folder management	yes	yes	no
Shared folder access	yes	yes	yes
Rename Folders	yes	yes	no
Create labs	yes	yes	no
Delete labs	yes	yes	no
Edit Custom topology mapping	yes	yes	no
Use only Custom topology mapping	yes	yes	yes

© EVE-NG LTD

Lab objects management add text, drawing on labs	yes	yes	no
Export/import labs	yes	yes	no
Nodes list management	yes	yes	yes, read-only
Networks management	yes	yes	yes, read-only
Start labs	yes	yes	yes
Stop labs	yes	yes	yes
Wipe nodes	yes	yes	yes
Console to all nodes	yes	yes	yes
Export all configs	yes	yes	no
Edit lab	yes	yes	no
Set nodes startup-cfg to default configset	yes	yes	no
Set nodes startup-cfg to none	yes	yes	no
Topology refresh	yes	yes	yes
Topology zoom	yes	yes	yes
EVE status	yes	yes	yes
Lab details UUID	yes	yes	yes
See startup configs	yes	yes	no
Delete default startup configs	yes	yes	no
Create and manage multiconfig sets	yes	yes	no
Close labs	yes	yes	yes
Lock labs	yes	yes	no
System/Stop all nodes	yes	no	no
Information tab access	yes	yes	yes
Work with more than one lab	yes	yes	yes
Lab timer function	yes	yes	no
Lab background dark mode	yes	yes	yes
Hide node labels	yes	yes	Yes
EVE Cluster administration	Yes	No	No


4.5 License purchasing and activation

- ⚠ Before purchasing a license, the customer must have **EVE-NG Professional** installed and readily accessible.
- ⚠ Recommended browser for license operations are: Chrome or Mozilla Firefox
- ⚠ You must be logged in to the EVE WEB GUI as Administrator.

Step 1: Obtain your license request from the Licensing tab of the top menu of the EVE PRO WEB GUI. License requests will work only if the host machine (and hypervisor if running a VM) has **Intel VT-x/EPT** enabled!
(See section **3** for details)

Step 2: Copy the content of the license request and keep it ready for the order process at **Step 6**. Orders without a license request cannot be processed.

© EVE-NG LTD

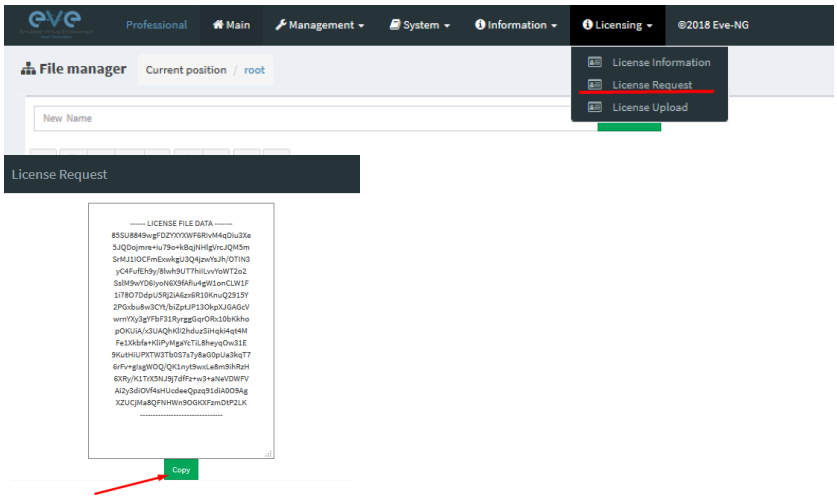


Step 3: Go to the EVE PRO or Learning Centre Purchase Portal and choose your Licenses and quantity.
Licenses that are unnecessary for your EVE Learning Centre or Corporate Edition licensing needs, can simply be deleted from your order by clicking on the cross next to them to remove them. Refer to sections: **4.2** and **4.3**


EVE-PRO Purchase Portal

EVE-Learning Centre or Corporate Purchase Portal


Step 4: Choose your preferred payment method. We currently support VISA, Mastercard, Bank/Wire transfer and PayPal.



Step 5: Complete the order form. If your license is for commercial/company use, you must select Company option.

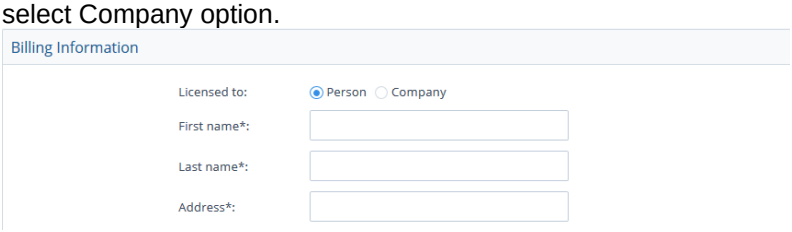

Step 6: At the end please paste your **license request content** from Step 2 and Please read and confirm the EULA agreement, which contains vital information about licenses. For companies, if necessary, in the Order Notes you can add additional information/reference, e.g. for your accounting department.

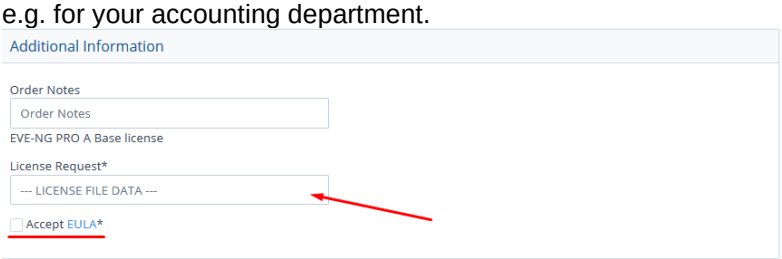

Step 7: After a while (usually 10-30 mins), your license is sent to the E-Mail used in the order form.

© EVE-NG LTD

⚠ IMPORTANT: Before loading the purchased license, make sure your EVE has Internet access. Your EVE DNS settings must be configured properly to resolve the FQDN. Internet connection is required to validate your EVE license with our EVE-NG license server.


⚠ IMPORTANT: If your EVE internet is using Proxy, make sure you have set the proxy settings described in section **3.5.3**

⚠ Offline EVE Pro license is supported for Bare EVE installs only. (Dedicated EVE server). VM Ware and Cloud environment EVE installs require Internet connection.


Step 8: Copy Content of your received License



Step 9: On your EVE WEB GUI, click on License Upload,



Paste your licence and click on Upload

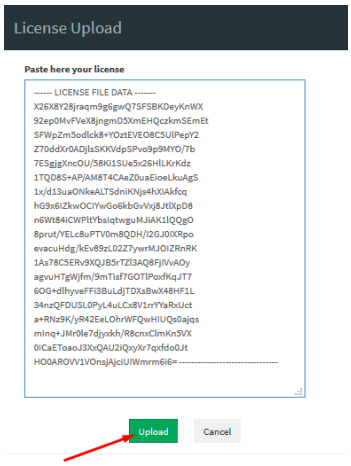

4.6 License deactivation

If you decide to deactivate EVE-PRO license on the host, please follow the steps below:

⚠ Go to EVE CLI and type:

```
cd /opt/unetlab/html/
```

```
rm eve-ng.lic

cp eve-ng.nolic eve-ng.lic
```

4.7 License Rehosting.

If you decide to re-install EVE-PRO or move it to another host, please follow the steps below:

⚠ **Pre-requisites:**

- EVE must have internet access!
- Only ONE EVE host must be turned ON and connected to the internet, do NOT have more than one EVE with the same license turned on at the same time!

Step 1. Make sure that you have only ONE EVE-PRO instance with this license running.

Step 2. Make sure you have unrestricted Internet access with a properly configured DNS server from your EVE server.

Step 3. Load your purchased license onto EVE server you want to rehost to.

Step 4. Reboot your new EVE

Step 5. Wait approximately one hour for the licence validation process to finish on the host.

⚠ **NOTE:** The re-hosted EVE server must have internet access to periodically validate the license. EVE receives a token with a licence validity time of 24 hours. During those 24 hours, the re-hosted EVE can be used offline. After 24 hours the token time expires and you have to get EVE online again (for approximately 30minutes) to receive a new token.

© EVE-NG LTD

5 EVE-NG Professional Update & Upgrade

⚠ Prerequisites: Internet access and working DNS on your EVE-NG is required.

Verify your internet reachability with named ping. Example: ping www.google.com

```
ping www.google.com
```

```
root@eve-ng:~# ping www.google.com
PING www.google.com (216.58.207.228) 56(84) bytes of data.
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=1 ttl=58 time=9.11 ms
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=2 ttl=58 time=19.5 ms
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=3 ttl=58 time=9.50 ms
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=4 ttl=58 time=9.56 ms
64 bytes from arn09s19-in-f4.1e100.net (216.58.207.228): icmp_seq=5 ttl=58 time=9.56 ms
```

If your ping is success, follow next step for update. If named ping has no success, please verify your DNS IP assigned for EVE or firewall. Some cases ping can be blocked by FW, but Internet and DNS are capable to make update/upgrade.


OPTION for bare EVE installations which has **bnx2x Broadcom Ethernet** drivers, please rewrite your driver to the newest linux-firmware:

```
sudo apt-get -o Dpkg::Options::="--force-overwrite" install linux-firmware
```

5.1 EVE-NG Professional Update


It is strongly recommended to keep your EVE-NG up to date. To update and upgrade, SSH to your EVE CLI.

To verify your current EVE-NG version, please follow “CLI diagnostic information display commands” in section **16.1.1**. You can verify your current EVE version from the System/System Status tab on the top menu of the WEB GUI as well.

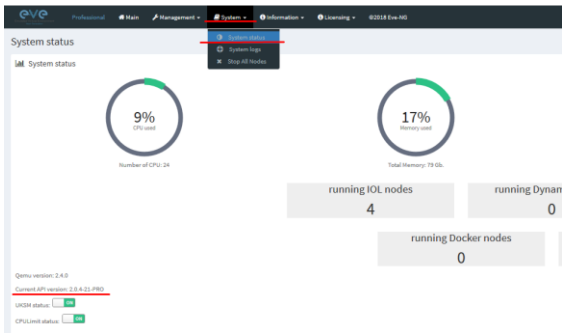

The newest version of EVE-NG can be verified by checking the official website: http://www.eve-ng.net. For update to the newest EVE-NG Professional version please follow the steps https://www.eve-ng.net/index.php/1845-2/

© EVE-NG LTD

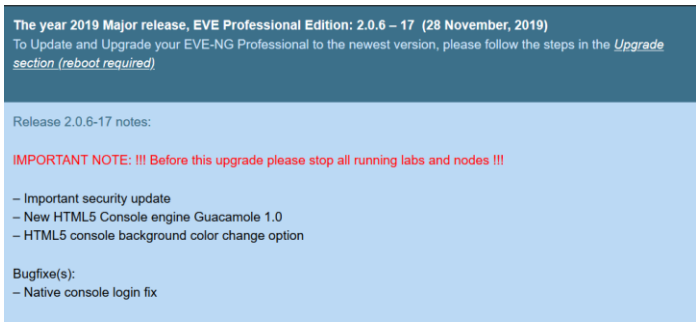

Type the below commands followed by Enter

```
apt update
```

In case the prompt asks to confirm with Y/N, answer Yes.

5.2 EVE-NG Professional Upgrade


For upgrade to the newest EVE-NG Professional version please follow the steps https://www.eve-ng.net/index.php/1845-2/

Type commands followed by Enter

```
apt upgrade
```


In case the prompt asks to confirm with Y/N, answer Yes.

⚠ **IMPORTANT NOTE:** If you are upgrading EVE PRO from older version, the installation may ask you to confirm additional! Information:

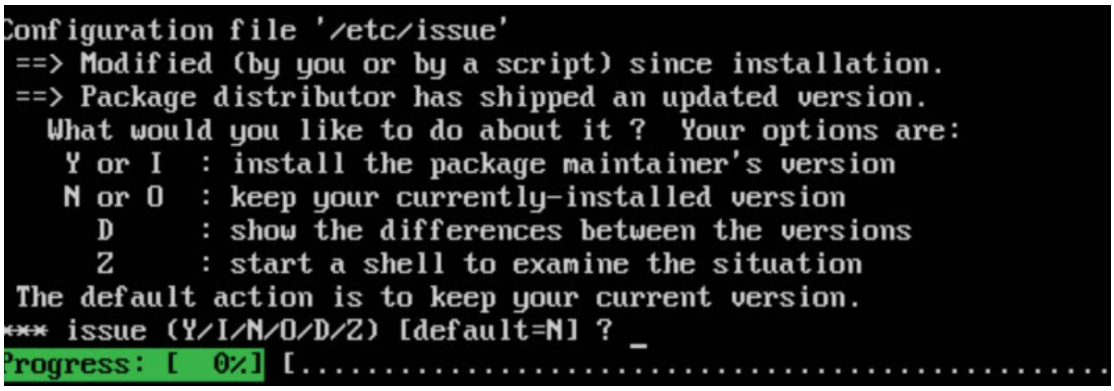

Answer for prompt above is **"N"**

© EVE-NG LTD

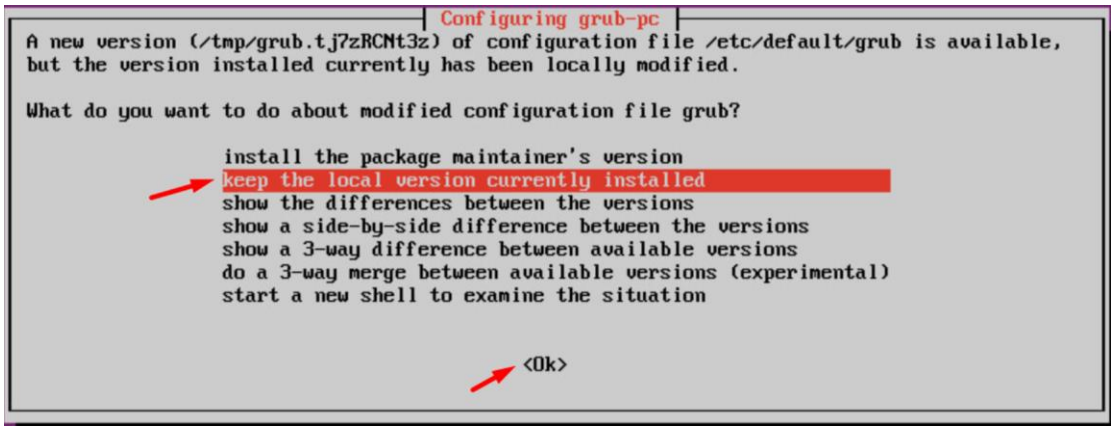

Answer for grub-pc version is: "**Keep the local version currently installed"**

After the completion of the update and upgrade, reboot your EVE Server. Type the following command and hit enter.

```
reboot
```

⚠ **IMPORTANT NOTE:** Do NOT make EVE updates or upgrades from within the HTML5 Desktop console!

© EVE-NG LTD

6 Types of EVE management consoles

⚠ **IMPORTANT NOTE:** EVE Console TCP ports. EVE Pro uses a dynamic port range between 1-65000. Dynamic means that every time you start a node on the lab, EVE assigns any free port from this range for Telnet, VNC or RDP access. Static TCP port assignment for Telnet sessions is not available in EVE PRO.

EVE Pro supports three different console types.


6.1 Native console




EVE Native console option requires locally installed software to access your lab nodes. To use the Native console option, you must have Administrator rights on your PC and ensure the TCP port range 1-65000 is not blocked by a firewall or antivirus software.

6.1.1 Native Console: telnet

Windows OS: You can use your preferred telnet program like Putty, SecureCRT or others.
Example: Putty as native telnet client on Windows.
To setup Windows native telnet client please follow section 3.6.1

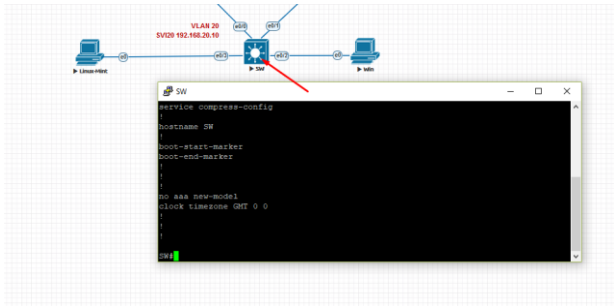

Linux OS: You can use your preferred telnet program like the Native Terminal, SecureCRT, or others.
Example: Telnet client from the native terminal on Linux Mint. To setup Linux native telnet client please follow section 3.6.2

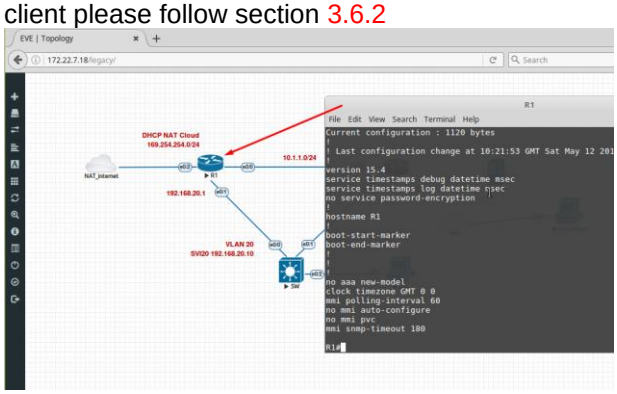

© EVE-NG LTD


MAC OSX: You can use your preferred telnet program like the native Terminal, SecureCRT, or others.
Example: Telnet client from the native terminal on MAC OSX. To setup MAC OSX native telnet client please follow section 3.6.3

6.1.2 Native Console: Wireshark

EVE Professional has an integrated Wireshark Docker station. This allows live captures without having Wireshark installed on the client machine. The EVE Capture console uses an integrated HTML session.
Right click on the node you wish to capture, choose capture and the interface. Capture Session will open in a new browser window.


EVE-PRO supports packet captures on ethernet and serial interfaces.
Select the interface frame type which will be captured:

- Ethernet for Ethernet, Fast Ethernet, Gigabit Ethernet.
- Serial interface frames: HDLC, PPP or Frame Relay.

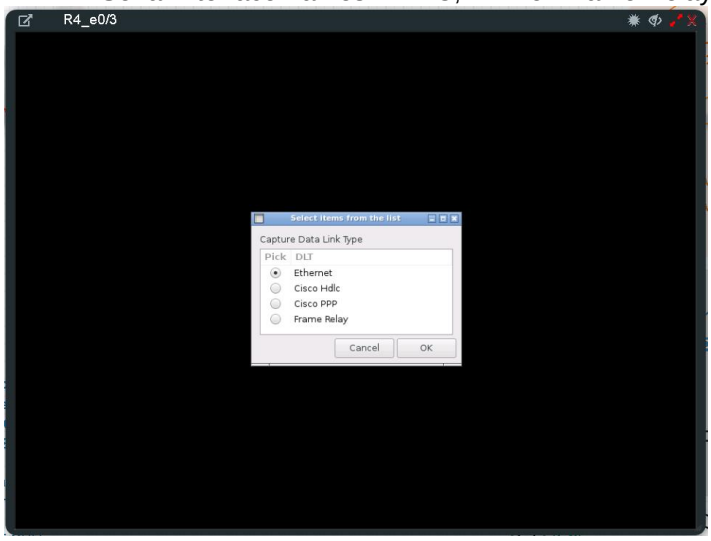

Integrated HTML RDP for Wireshark capture

© EVE-NG LTD

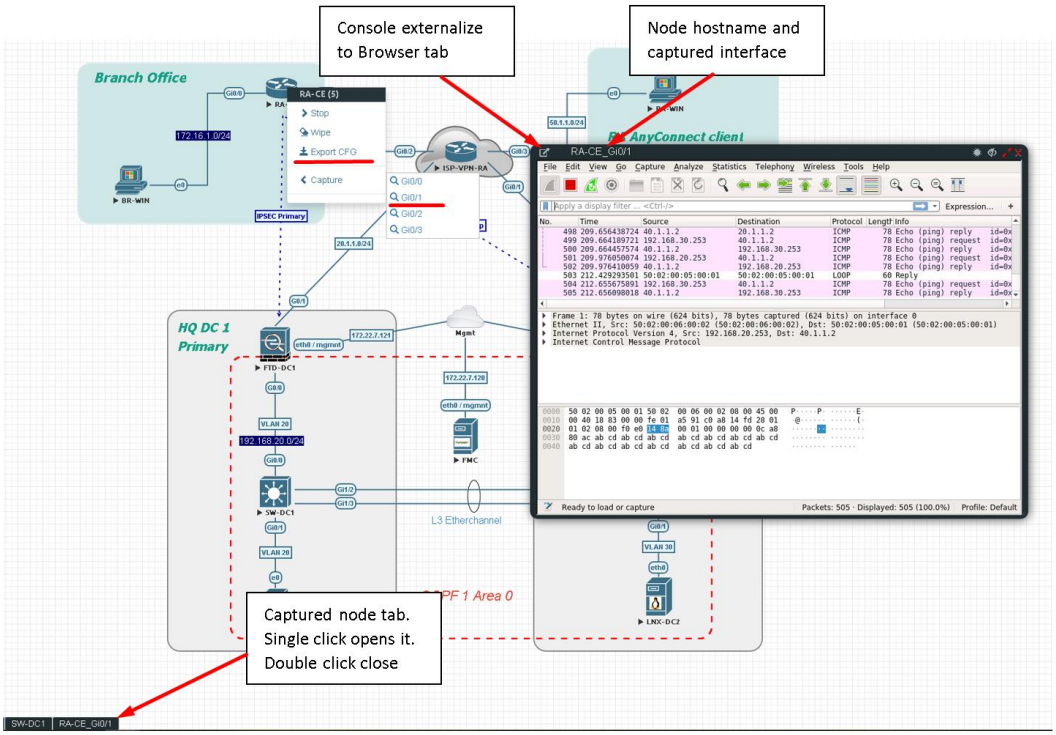

Example: RA-CE live interface G0/1 capture.

To save the captured file on your local PC, please refer to section 12.1


6.1.3 Native Console: VNC

Windows OS: Recommended and tested is UltraVNC but any other compatible one can be used.
Example: UltraVNC as Native VNC client on Windows. To setup Windows native VNC client please follow section 3.6.1



Linux OS: Remote Desktop Viewer for VNC Sessions.
Example: Remote Desktop Viewer for VNC sessions on Linux Mint. To setup Linux native Remote Desktop Viewer please follow section 3.6.2


© EVE-NG LTD

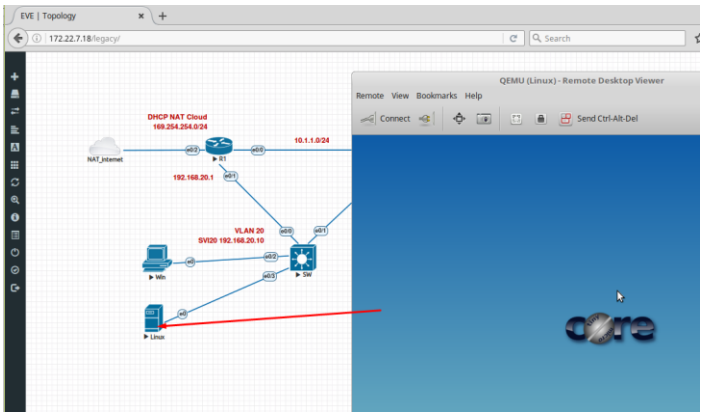


MAC OSX: Preferred VNC program: Chicken VNC
Example: Chicken VNC as Native VNC client on MAC OSX. To setup MAC OSX native RDP Viewer client please follow section 3.6.3

6.1.4 Native Console: RDP

Windows OS: Windows Native RDP.
Example: Windows RDP session to Win10 host in the lab.

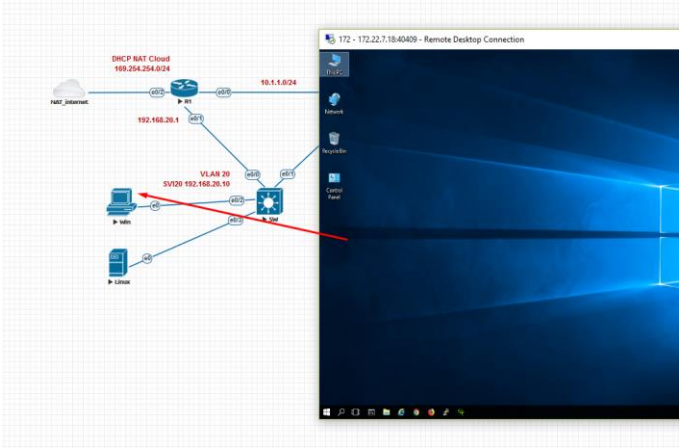


Linux OS: Remote Desktop Viewer as RDP session to lab Win10 host.
Example: RDP session to Win10 host in the lab. To setup Linux native Remote Desktop Viewer please follow section 3.6.2

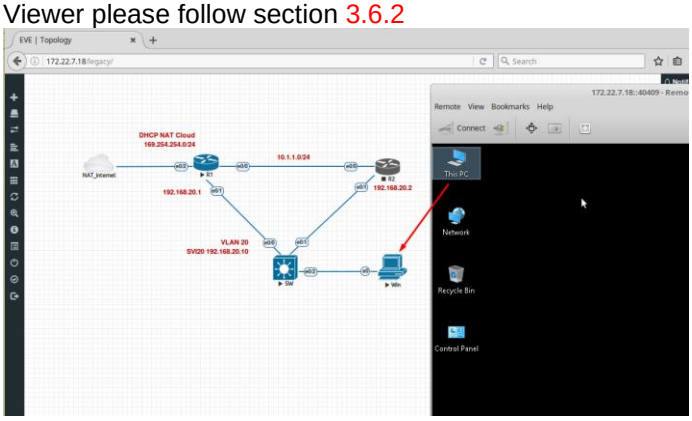

MAC OSX: Remote Desktop Viewer as RDP session to lab Win10 host.
Example: RDP session to Win10 host in the lab.
To setup MAC OSX native RDP Viewer client please follow section 3.6.3


© EVE-NG LTD

6.2 HTML5 console

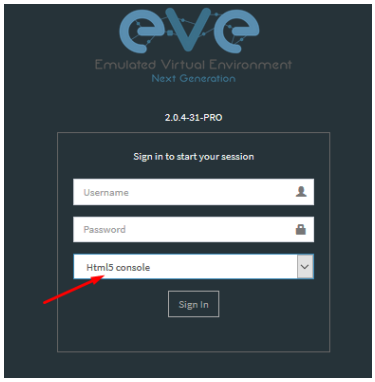

The EVE PRO HTML5 console provides a clientless solution for managing labs and node sessions. Management is achieved directly through the browser by using the Apache Guacamole HTML5 Engine. It is very convenient for Corporate users with restricted Workstation permissions (Locked Telnet, vnc, rdp).


6.2.1 HTML5 Console window functions

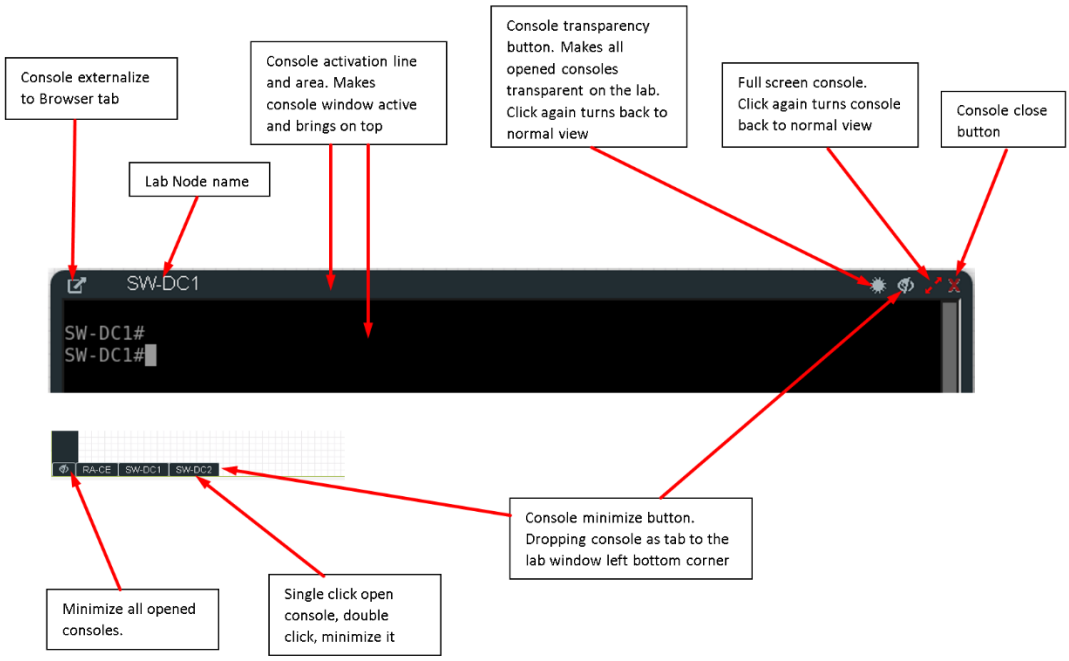


6.2.2 HTML5 Console: Telnet

HTML5 Telnet console is integrated and opens telnet sessions in the browser.


© EVE-NG LTD

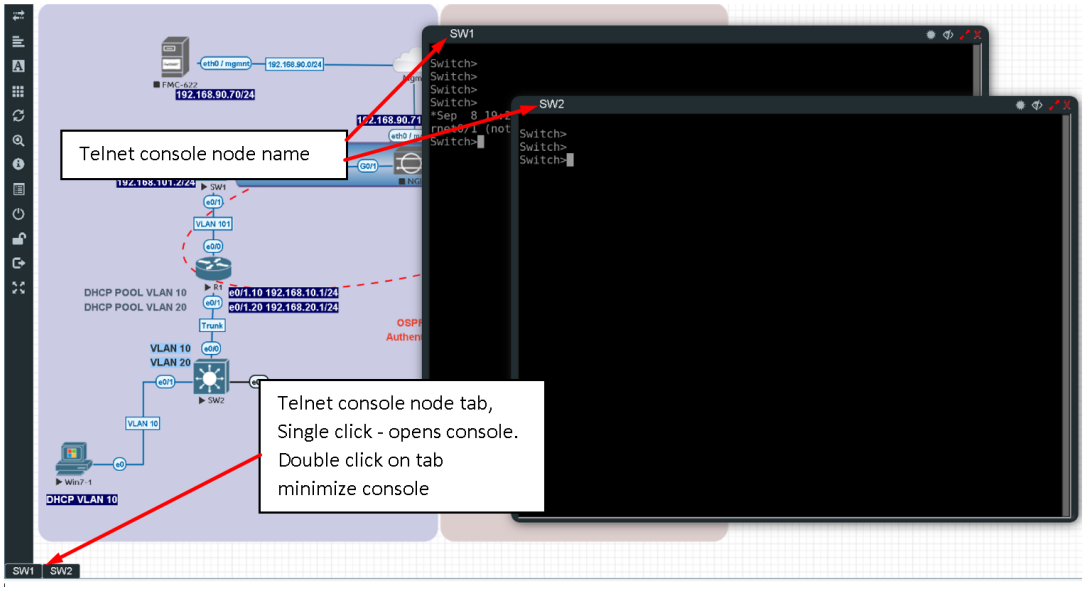

Option: The new Chrome v70.0.3538.110 and higher allows the use of the copy/paste function inside the HTML session. Type in your Chrome browser "**chrome://settings/content/clipboard**" and press **Add** to allow the use of the clipboard extension for your EVE Server: **https://your_ip:443**

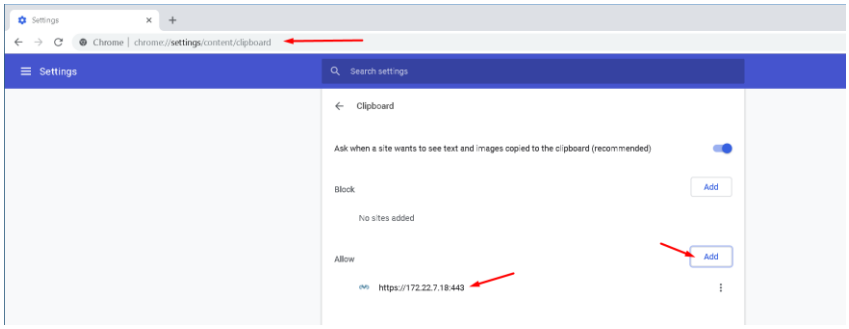

Option: The new Firefox v63.0.3 and higher allows the use of the copy/paste function inside the HTML session. Type in your Firefox browser "**about:config"** and enable clipboard values below:

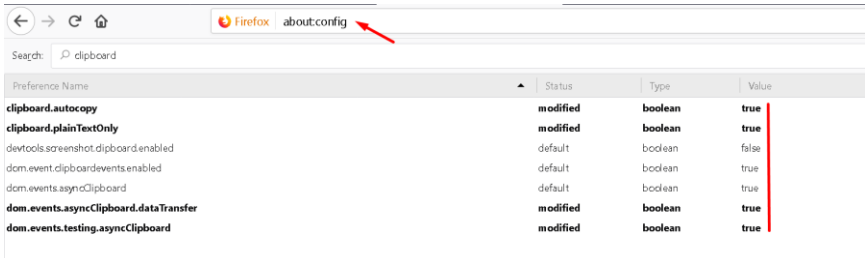


6.2.3 HTML5 Console: Wireshark


Right click on the node you wish to capture, choose capture and the interface. Capture Session will open in a new browser window.

© EVE-NG LTD

EVE-PRO supports packet captures on ethernet and serial interfaces.
Select the interface frame type which will be captured:

- Ethernet for Ethernet, Fast Ethernet, Gigabit Ethernet.
- Serial interface frames: HDLC, PPP or Frame Relay.

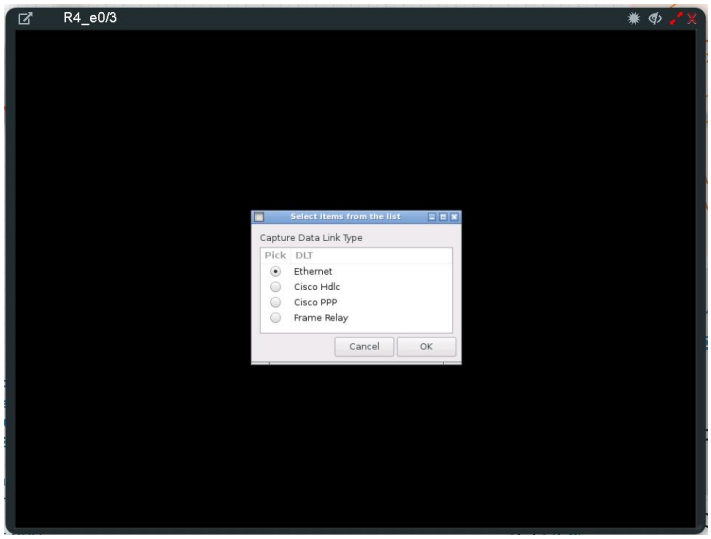


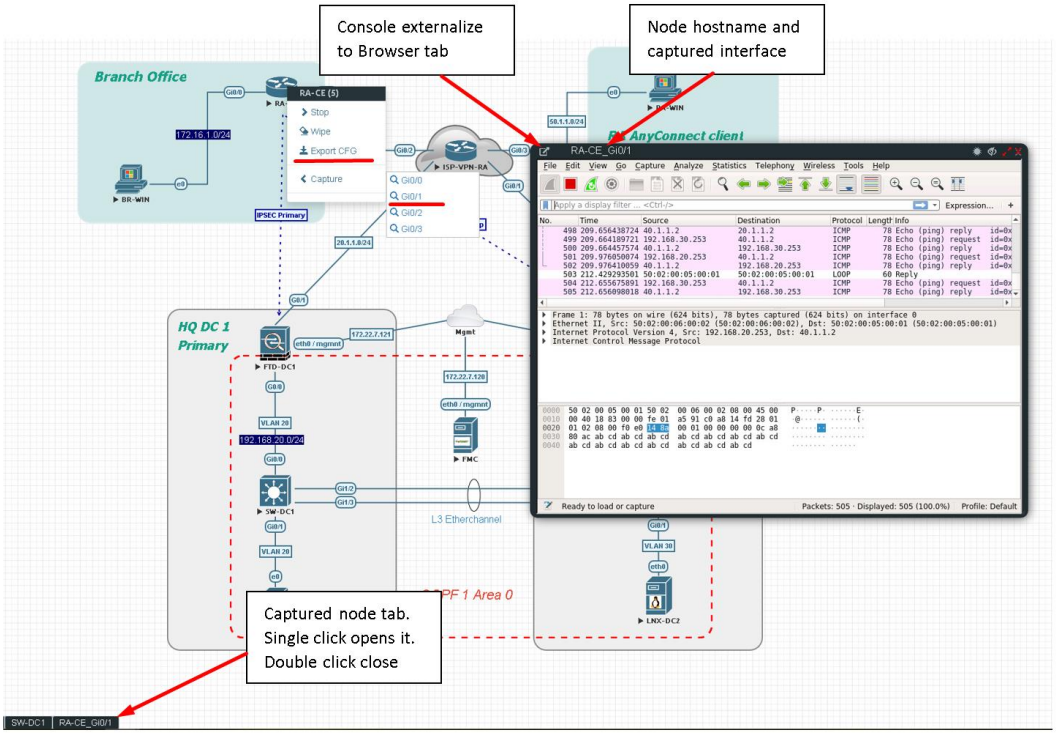

To save captured file to your local PC, please refer section 12.2


6.2.4 HTML5 Console: VNC

HTML5 VNC console is integrated and opens VNC sessions in the browser.

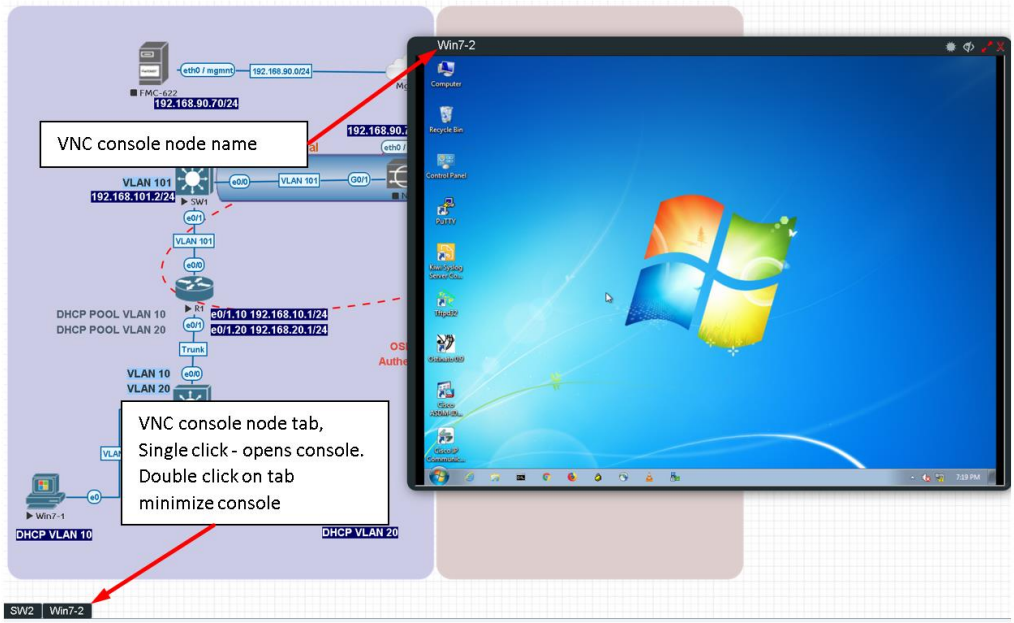

6.2.5 HTML5 Console: RDP

HTML5 RDP console is integrated and opens RDP sessions in the browser. For Windows 7, 8, 10, Windows Server 2012, 2016 please mind the note below.

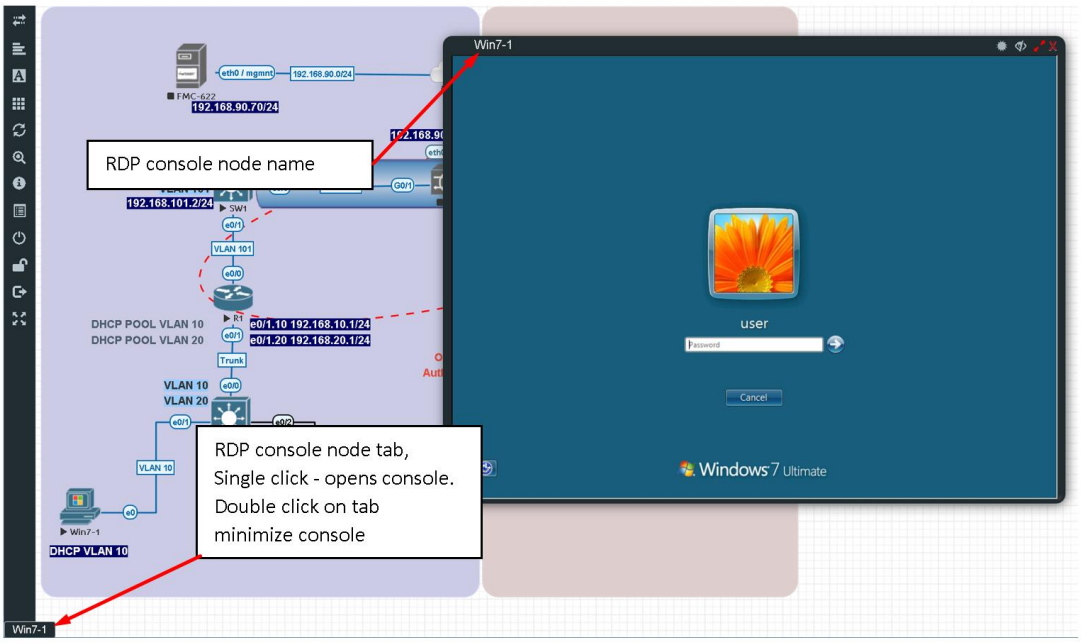


⚠ **IMPORTANT NOTE:** For all Windows nodes, the console type must be set to **RDP-TLS** in the node template**.** RDP-TLS node console option is actually only used with HTML5 RDP sessions.

The username and the password can be configured in the node edit settings. This will allow you resize HTML RDP console without re-login in the windows host.


© EVE-NG LTD

Example below, Edit node, Win10, Console type rdp-tls, username: user and password: Test123

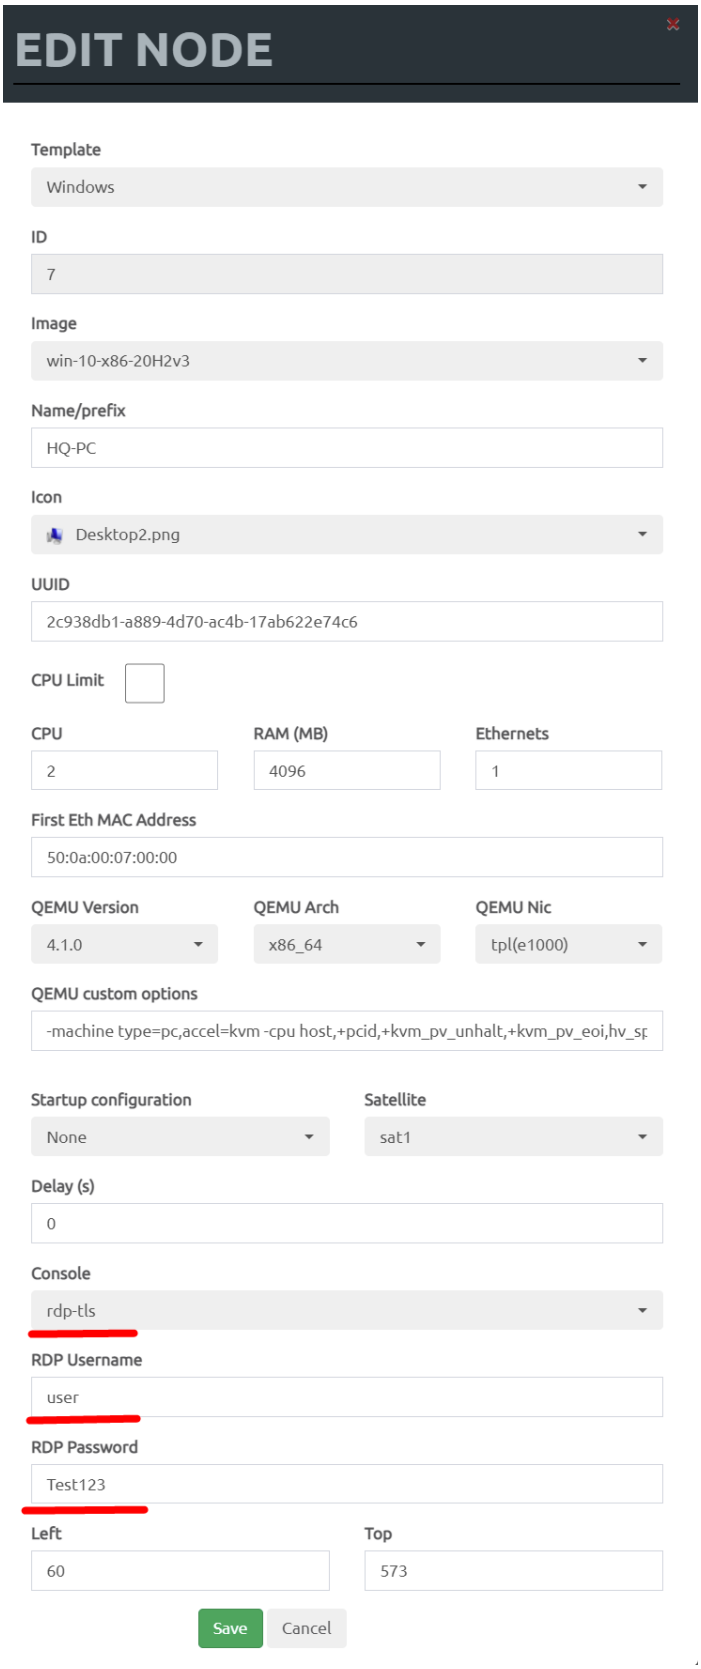

© EVE-NG LTD


6.3 HTML5 Desktop console

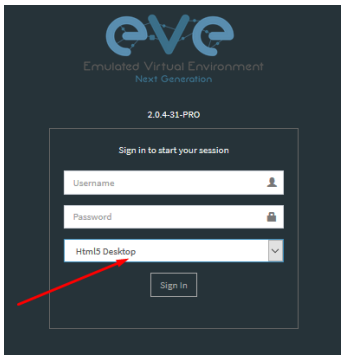


EVE PRO HTML5 Desktop provides a full-featured clientless solution for managing labs and node sessions. Management is achieved directly through the browser by using an integrated docker desktop that is accessed through the Apache Guacamole HTML5 Engine. The docker contains a full featured Linux desktop and is very convenient for corporate users with restricted workstation rights (locked telnet, vnc, rdp).

6.3.1 Login to HTML5 Desktop console

Step 1: On your first login to the EVE HTML5-Desktop console, EVE will open a new HTML window session to an integrated Docker management station. On the Desktop you will see another EVE login icon.

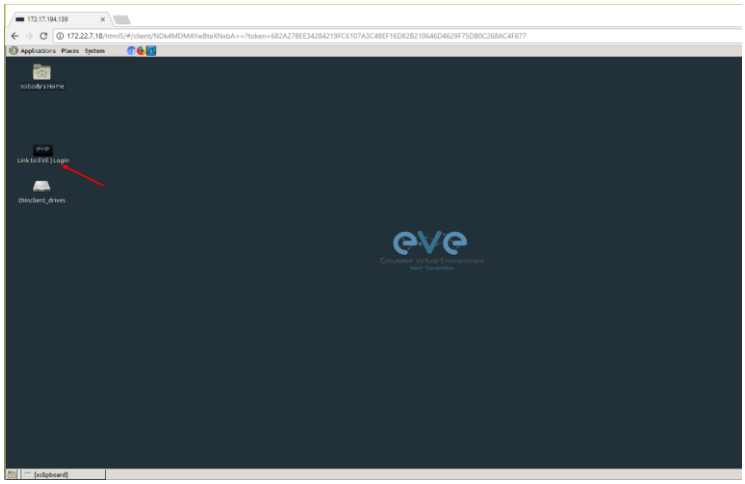

Step 2: Double-click the “Link to EVE | Login” icon and log into EVE using NATIVE console.

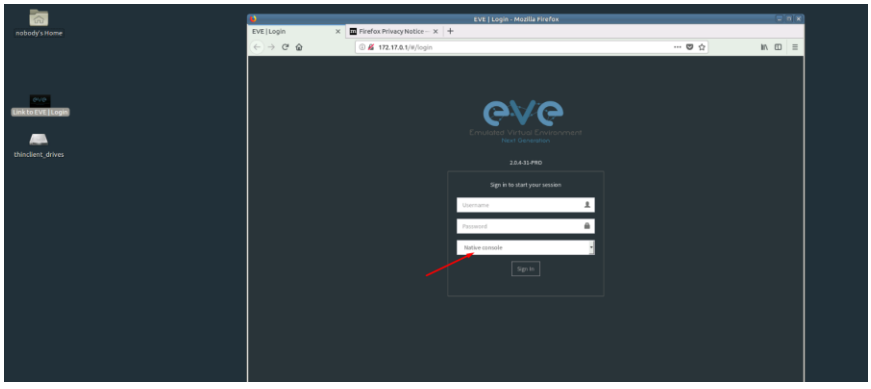


Inside of the integrated docker station, it will open another session to EVE. All features inside of the Docker Desktop will work as you are used to with the Native console.

© EVE-NG LTD

6.3.2 HTML5 Desktop Console: telnet

The integrated management docker station telnet client allows you to telnet to nodes. Telnet sessions are in a tabbed style as shown below.

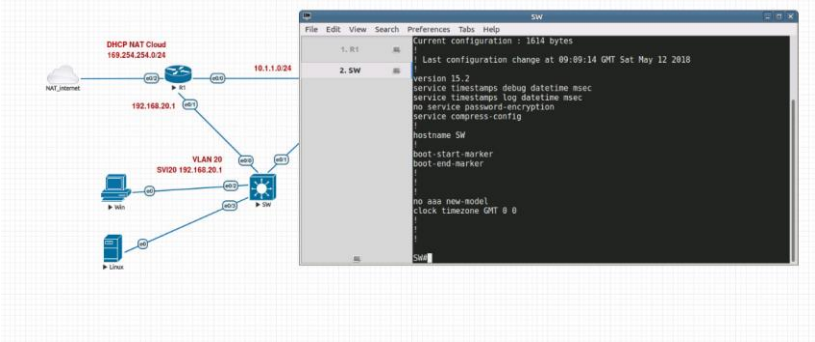


6.3.3 HTML5 Desktop Console: Wireshark

Right click on the node you wish to capture, choose capture and select the relevant interface. The capture will open in an RDP session window.


EVE-PRO supports packet captures on ethernet and serial interfaces.
Select the interface frame type which will be captured:

- Ethernet for Ethernet, Fast Ethernet, Gigabit Ethernet.
- Serial interface frames: HDLC, PPP or Frame Relay.

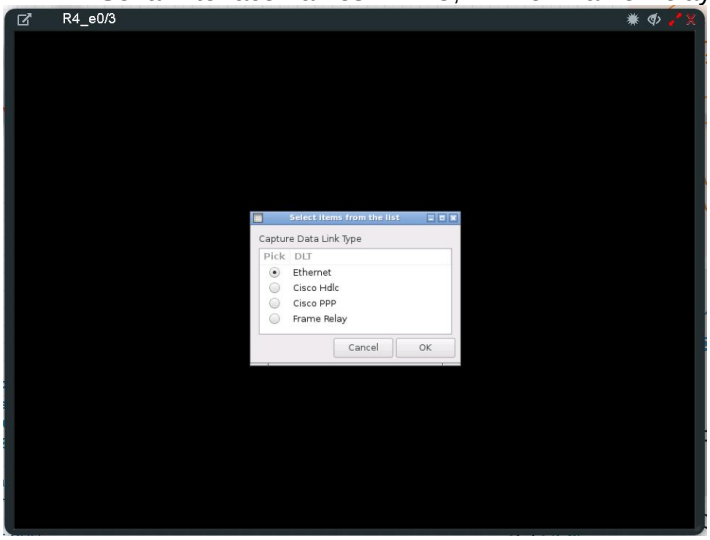


The integrated management docker station Wireshark client allows you to capture and save captured files onto the docker station. For instructions on how to save files to your local PC, please refer to section 12.3

© EVE-NG LTD

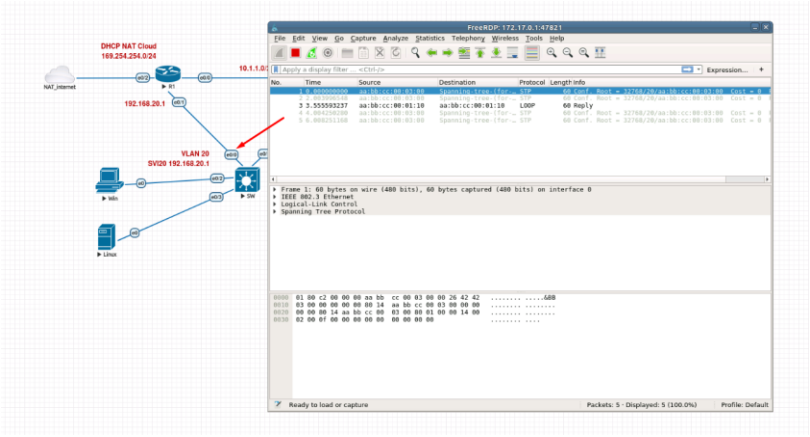

6.3.4 HTML5 Desktop Console: RDP

The integrated management docker station RDP client allows you to open Remote Desktop sessions to Windows nodes. For directions on how to transfer files to the local PC, please refer to section 13

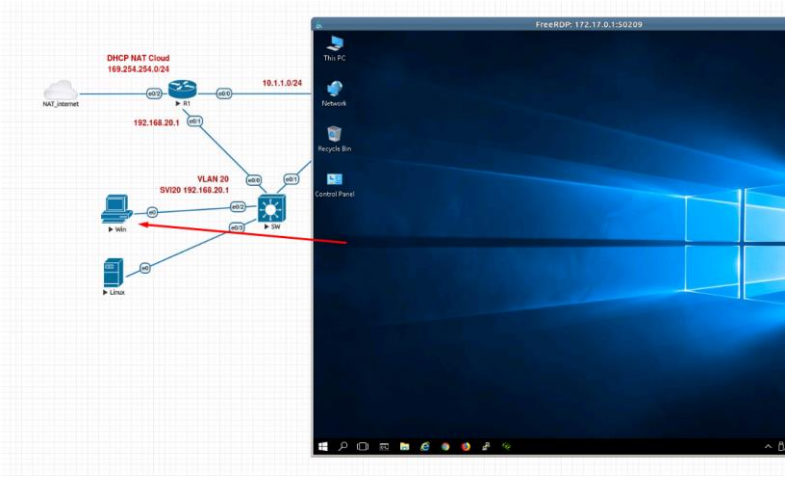

6.3.5 HTML5 Desktop Console: ThinClient Files exchange


The HTML5-Desktop console offers an amazing feature that allows you to exchange files between your host PC and the EVE management Linux host. Please refer to section 13 for detailed instructions.

© EVE-NG LTD

7 EVE WEB GUI Management


7.1 EVE Management Page

The Main EVE management window

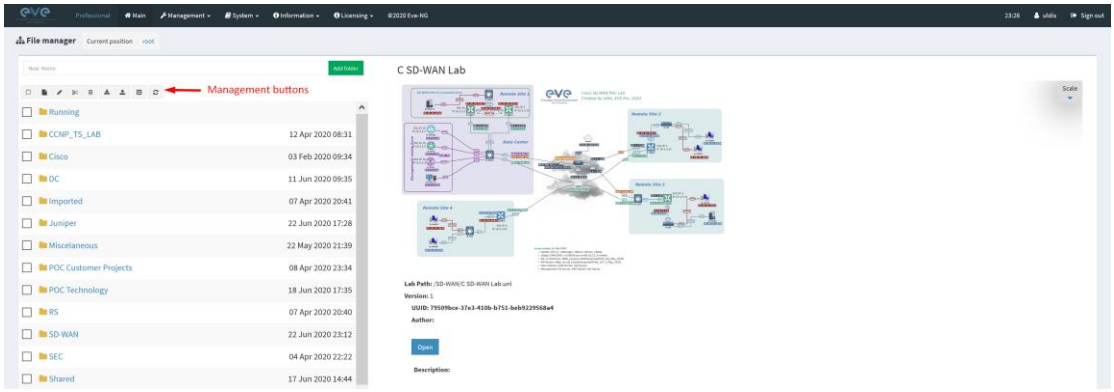

The lab preview actual picture appears after 3-5 seconds.

7.1.1 Management buttons








Button	Description
	Select All or Deselect All folders or labs in the EVE tree
	Create/Add new Lab
	Change selected item name. To use this option, please select the folder or lab that you want to rename. You must not rename the Shared folder, the Users folder or any folder inside the Users folder.
	Move selected item(s) to a different location. To use this option, please select the folder(s) or lab(s) that you want to move.
	Delete selected folders or labs. You must not delete the Shared folder, the Users folder or any folder inside the Users folder.
	Import an EVE lab or lab folder from a previous export. Import file must be in .zip format

© EVE-NG LTD




	Export EVE lab or folder. Select folder(s) and/or labs you wish to export and select this option. The export is saved to your local PC in .zip format and is ready to import to another EVE.
	Toggle the sorting folders and labs between alphabetical and last edit date (ascending/descending cannot be changed currently).
	Refresh current folder content

7.1.2 Management tabs



Tab	*Description*
	Returns back to the EVE Home Management screen.
	Management dropdown, opening the management submenu. Management submenu, refer to sections: 7.3, 7.3.2, 7.3.3
	System dropdown. System submenu, refer to section 7.4
	Information dropdown Information submenu, for details see section 7.5

© EVE-NG LTD

	
 	Licensing dropdown Licensing management, please see section 4

7.2 Folders and Lab files management

This section will explain how to manage folders and labs on the EVE management page.

7.2.1 Folders Management


EVE Professional has three default folders used for various operations. These must not be deleted or renamed (see below).



- Admins can create additional folders for any user.
- Editors can create or manage folders in their own profile/folder or within the Shared folder

7.2.1.1 Default folder Running

EVE professional allows a single user to run multiple labs and switch between them with the Running folder.




Example:

- Start a lab and close it
- Open and start another lab and close it

When you open your Running folder, you will see both running labs in it. It is easy to switch between labs.

The example below is showing two running labs in the Running folder.

© EVE-NG LTD

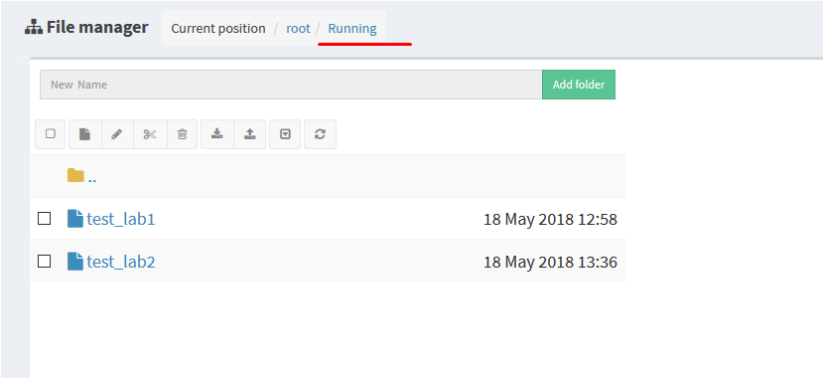

7.2.1.2 Default folder Shared

To manage the Shared folder an Admin or Editor user account is required.


The EVE Professional Shared folder is visible to all EVE users. Admin and Editor Accounts can create folders or labs and place them into the Shared folder.




Example: An Admin creates a lab and places it into the Shared folder.


Step 1: Create a lab, refer to section 9.1

Step 2: Select the lab you wish to move to the Shared folder and press **Move to** (or create it in the Shared folder from the start).

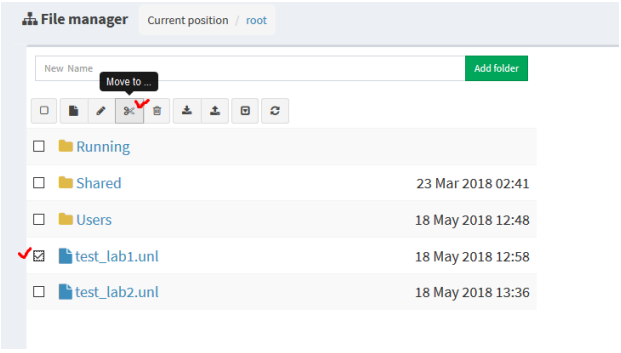

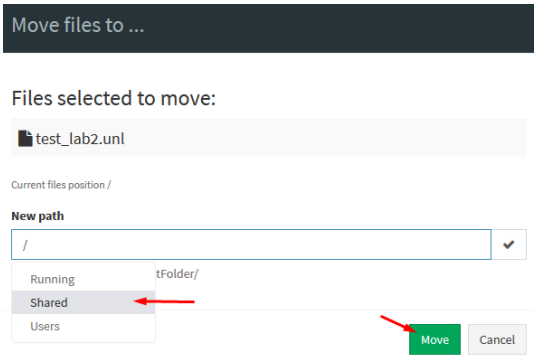

Step 3: Another user account can use the lab placed by the Admin in the Shared folder

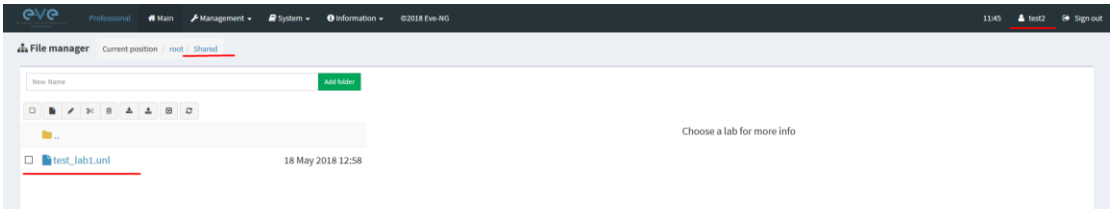

⚠ NOTE: Every user has its own profile; this means that every user has an independent Running folder where this lab runs independently from other users.

© EVE-NG LTD


⚠ NOTE: Labs can be created and modified (e.g. settings and preconfigs) by an Admin or an Editor user. The User role can use the lab only exactly the way it was configured by an Admin or Editor and is unable to change any settings.

⚠ NOTE: Admins and Editors can create folders and labs inside the Shared directory

7.2.1.3 Default folder Users


To manage the Users folder, an Admin user account is required.

The Users directory is a default EVE folder where Editors and Users have their personal folders stored.



Once an Admin has created a new Editor or User account, EVE will automatically create a folder with the user login name under the default directory Users.


Example: Below you can see the folders for the users with the following login names: **test2, test3 and test4**

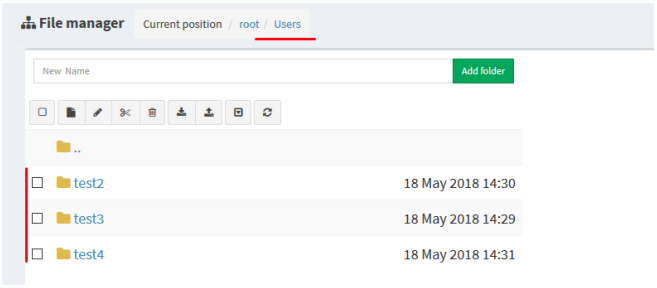

⚠ NOTE: An Admin can manage any user's folder or place labs in it.

7.2.1.4 Create folder

An Admin or Editor user account is required.

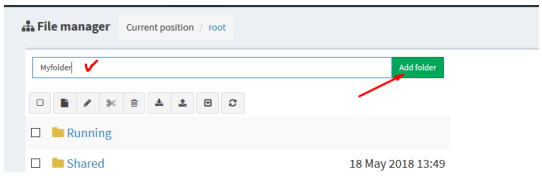


Type the new folder name and click "Add Folder"

⚠ NOTE: Editors can only create folders within their own profile folder or in the Shared folder

7.2.1.5 Delete folder

An Admin or Editor user account is required.

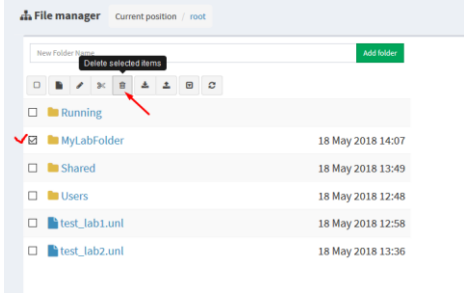


Select the folder you wish to delete and press Delete.

⚠ NOTE: All folder content will be deleted as well.

⚠ NOTE: Editors can only manage their own or the Shared folder

© EVE-NG LTD

7.2.1.6 Move Folder

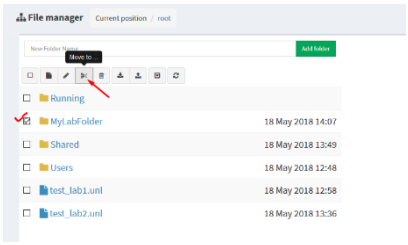


An Admin or Editor user account is required.

Select the folder you wish to move and press the Move to button.


⚠ NOTE: Editors can only manage their own or the Shared folder

Select the target destination for your folder and confirm by clicking on Move.

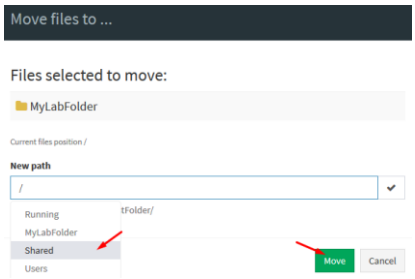


7.2.1.7 Export Folder

Select the folder(s) you wish to export from your EVE and press Export.

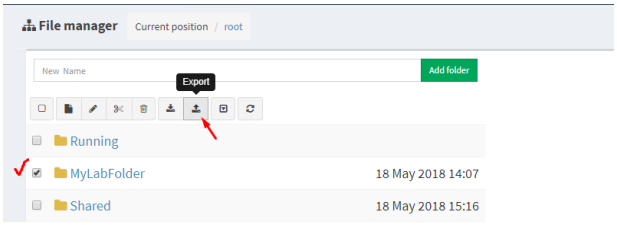

Save the exported file as .zip to your local PC. The exported zip file is ready to import to another EVE instance.




If your browser is set to save downloaded files to a default directory, your exported file will be saved in the browsers default downloads directory.

7.2.1.8 Import Folder


⚠ IMPORTANT: Importable file MUST be in .zip format, do NOT unzip the file.

© EVE-NG LTD


Step 1: Press the Import button.

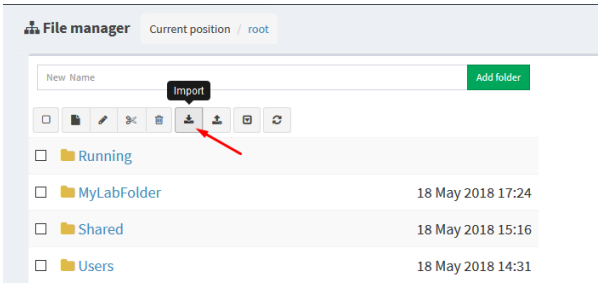


Step 2: Choose the zipped file that contains EVE folders with labs.

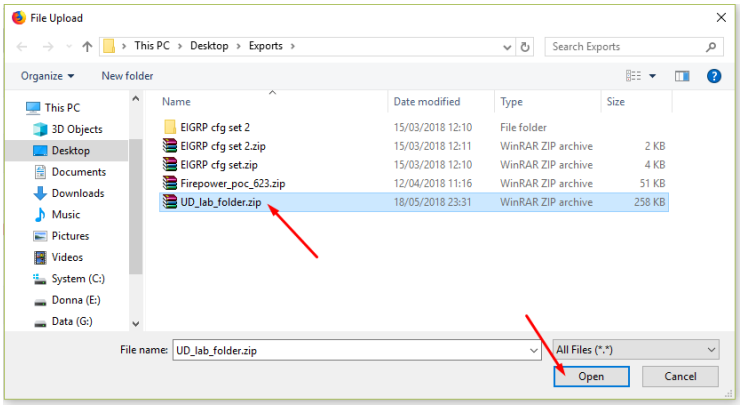

Step 3: Press the Upload Button

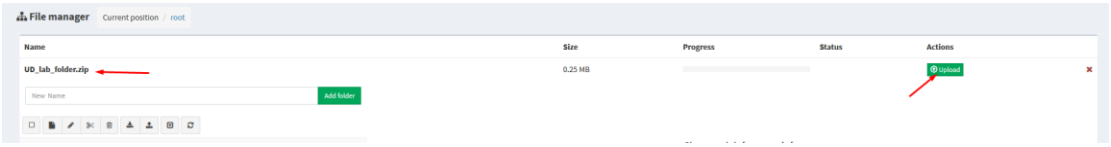


Step 4: After you made sure your folder is imported and has all its content (labs), you can close the upload session.

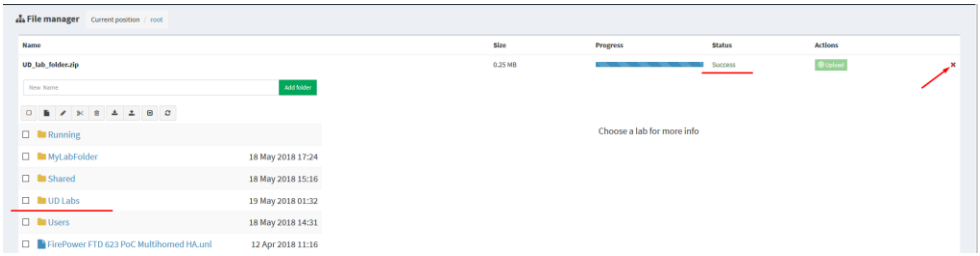

7.2.2 Lab files Management

You can manage created labs from the main EVE file manager window

© EVE-NG LTD

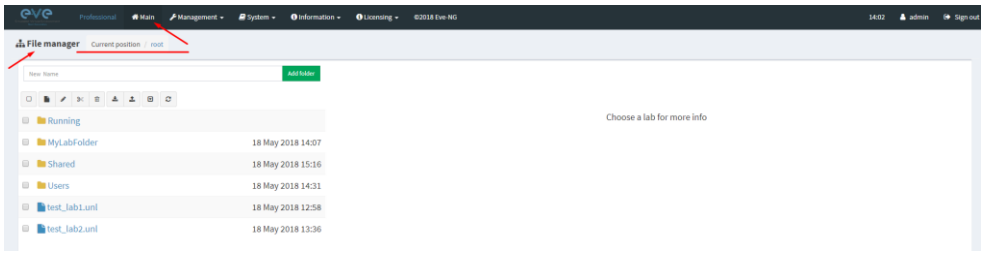


7.2.2.1 Create Lab

The Admin or Editor user account is required.

⚠ NOTE: An Editor can create labs only within his personal folder or in the Shared folder

Click on the New Lab button and refer to section 9.1

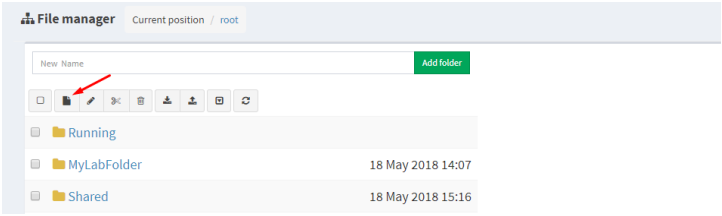


7.2.2.2 Delete Lab

The Admin or Editor user account is required to delete labs.

⚠ NOTE: An Editor can delete labs only within his personal folder or in the Shared folder

Step 1: Select the lab or labs you wish to delete and then press the Delete button

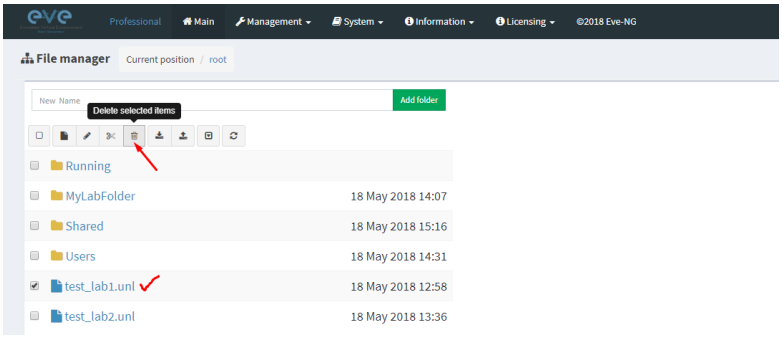

7.2.2.3 Clone Lab

The Admin or Editor user account is required to clone labs.

⚠ NOTE: An Editor can create labs only within his personal folder or in the Shared folder


The cloning feature provides a very convenient way to duplicate original labs to share with others or base another lab on it.

Cloned labs will copy exported configs (on supported nodes) but will not copy saved states/configurations in Qemu nodes like Windows hosts, Cisco ISE, or other Qemu nodes that


© EVE-NG LTD

are not supported by the export config feature. Please refer to section 11.1 for more information on configuration export for labs.

Step 1: Select the lab you wish to clone and move the mouse pointer (blue) to that lab, an extra option will appear. Click on Clone.

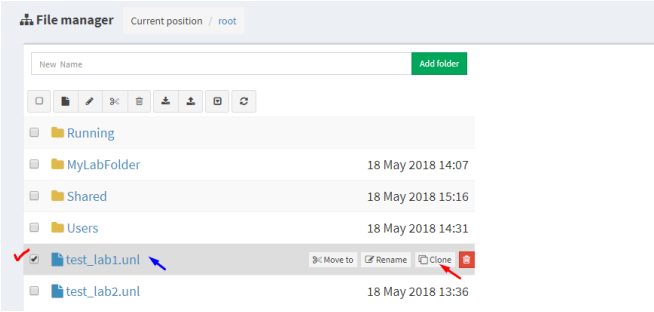


Step 2: Your lab will be cloned with all your exported configurations or configuration sets with a new name.



Step 3: The lab has been cloned lab and can be renamed to your liking. Move the mouse pointer to the cloned lab and choose Rename.



Step 4: Rename it, and click OK to confirm



7.2.2.4 Move Lab

The Admin or Editor user account is required to move labs.


⚠ NOTE: An Editor can create labs only within his personal folder or in the Shared folder

Step 1: Select the lab you wish to Move and move the mouse pointer (blue) to that lab, an extra option will appear. Choose Move to.




© EVE-NG LTD

Step 2: Choose the path to the new destination and confirm by clicking Move

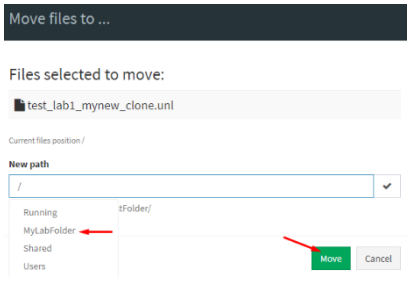


7.2.2.5 Export Lab

Select the Lab(s) you wish to export from your EVE Server and press Export.

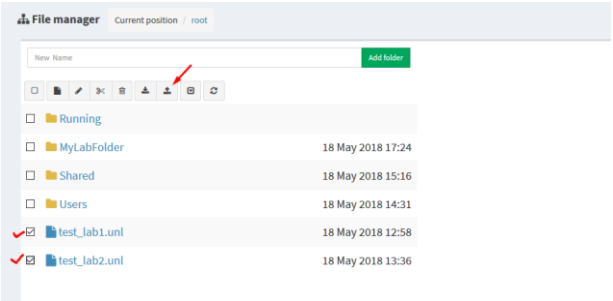

Save exported file as .zip to your local PC. The exported zip file is ready to import into another EVE.




If your browser is set to save downloaded files to default directory, your exported file will be saved in the browsers default downloads directory.

7.2.2.6 Import Labs


⚠ IMPORTANT: Importable file MUST be in .zip format, do NOT unzip the file.

Step 1: Press the Import button.

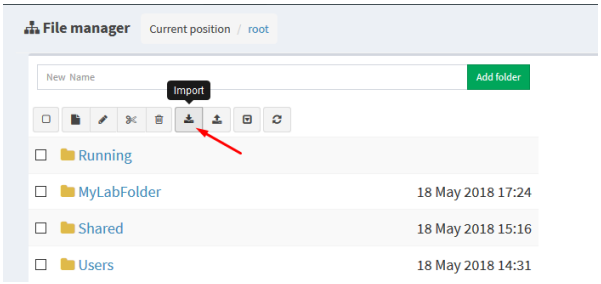


Step 2: Choose the zipped file which contains the EVE labs.


© EVE-NG LTD

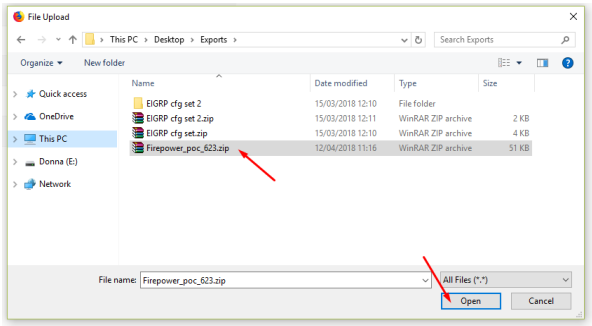

Step 3: Press the Upload Button

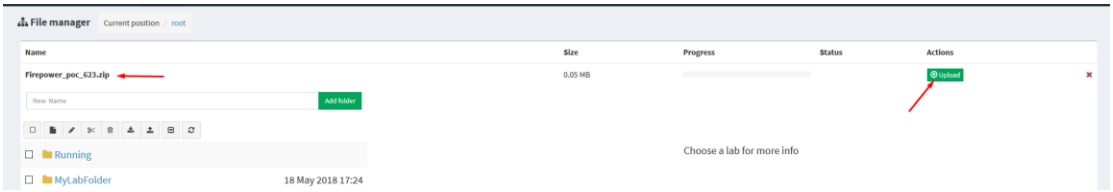


Step 4: After you made sure your lab is imported, you can close the upload session.

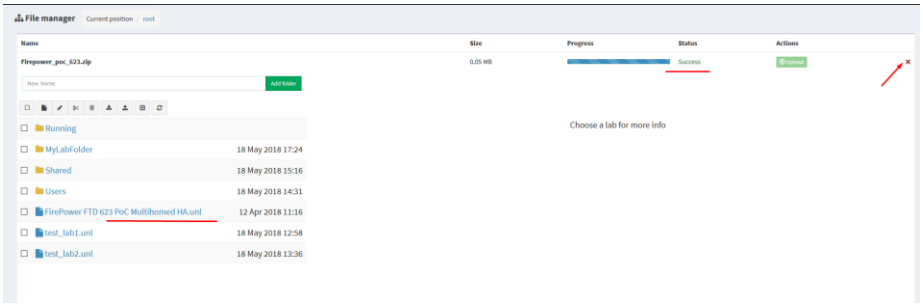

7.3 EVE Management Dropdown Menu

7.3.1 EVE User management

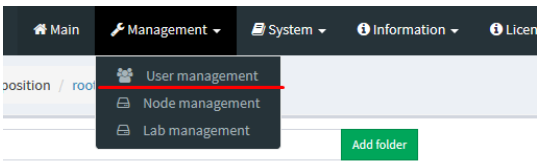


The User Management page, under the Management dropdown, will allow Admin accounts to manage other user accounts.


⚠ Only the **Admin** role is allowed to create or edit user accounts.

7.3.1.1 Creating a new EVE User

Step 1: Open the User management submenu. Management>User management and click Add user

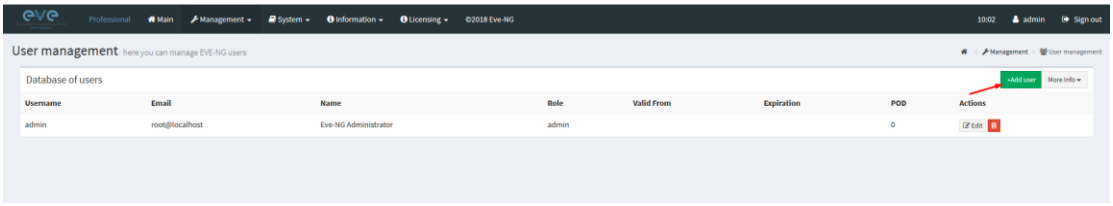


Step 2: The Add New User management window will pop up. Fill in the main information about your EVE user

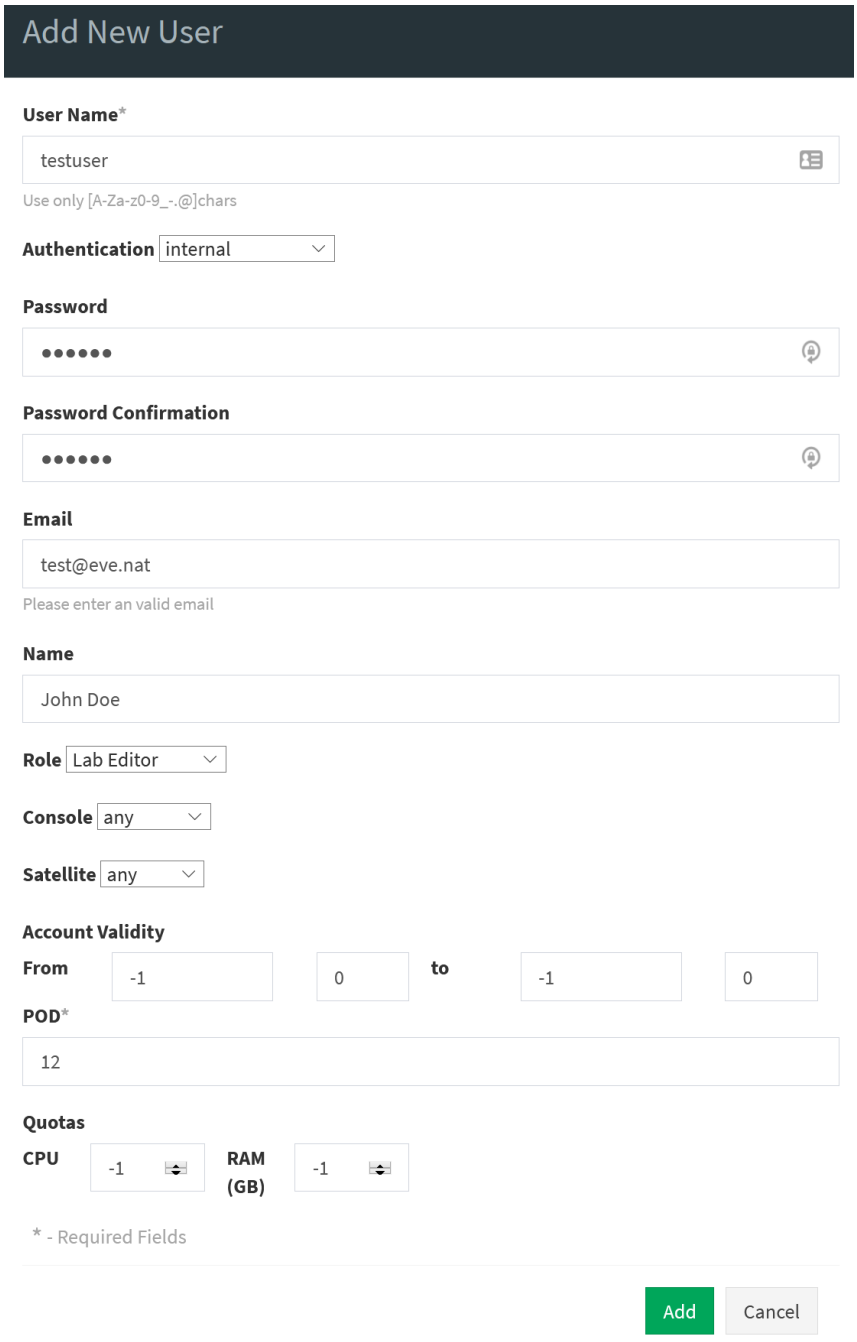


Step 3: If your user will be Radius authenticated, please Select Radius from Authentication menu. Passwords will be striped off, because authenticator will look Radius server for user password. How to setup radius server IP and Shared secret please follow Section:**17.1**

© EVE-NG LTD

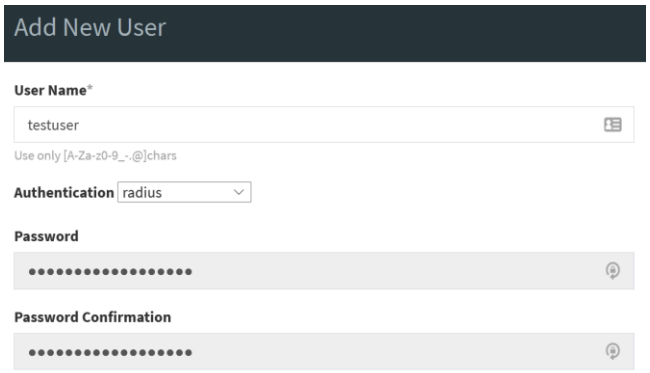


Step 4: If your user will be Active Directory (LDAP) authenticated, please enable Active Directory from Authentication Menu. Passwords will be striped off, because authenticator will look Active Directory server for user password. How to Active Directory server IP please follow

NOTE: Username for Active Director must contain domain at the end of username. Example: labuser@eve.lab

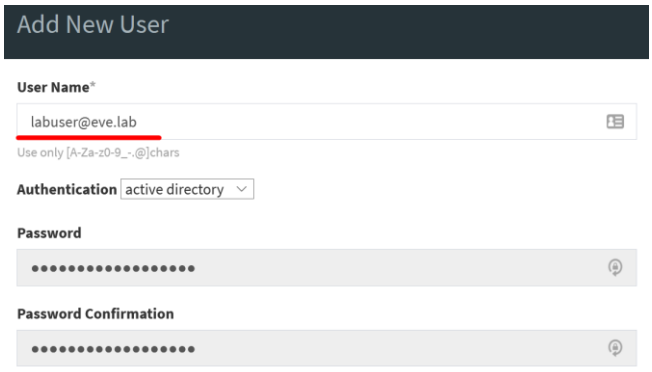


Step 5: If you have bought other EVE licenses, you can choose the preferred user role. For licensing and user roles please refer to section **4**

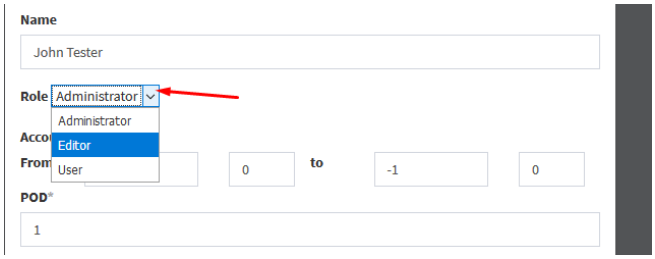


Step 6: Set the Console type for the user. If Console type is set exact: Native, HTML or HTM5 Desktop, user after login in the EVE will be forced to use selected Console Type. If Console Type is set to “any”, user is able to choose Console type on Login page which Console will be used.

© EVE-NG LTD

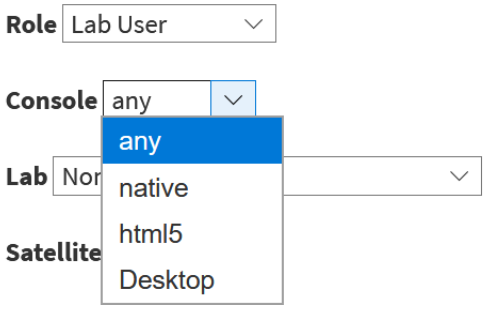


Step 7: **Sticky Lab.** Applies for User role only. Set the specific Lab for the user “sticky lab”. After login in the EVE User will directed only to this lab. He cannot close the lab to get in main Lab management page. User can Start/Stop/Wipe lab, as well save his lab work on the lab devices. Follow Section: 7.3.1.5

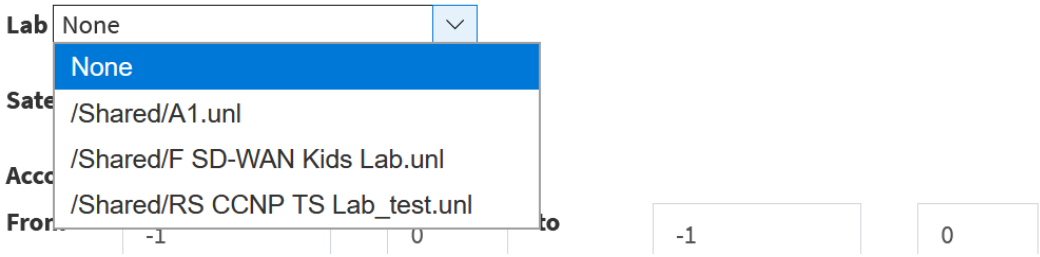

Step 8: Set the Cluster Satellite for the user. This applies for Editor and User roles. User will stick to selected Satellite. Editor or User will be forced to use only selected Satellite server.

If the value is set to “any”, Editor role can select or change Satellite on the lab himself. User role will use Satellites set by admin on the lab.

The value “any” is set y default.

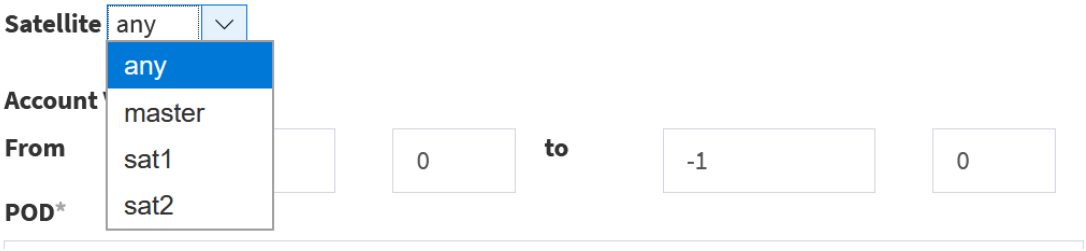

Step 9: Set the access date and time From - to. If the fields are left empty (untouched), your user will have no time restrictions for accessing the EVE Server. Account validity with time settings is available for Editor and User roles only.

⚠ Admin accounts have no time limit for account validity and resource, and Account Validity time or resource cannot be set.

© EVE-NG LTD




Step 10: The POD number is a value assigned to user accounts automatically. POD numbers are like user profiles inside of EVE and are a unique value for every user Think of PODs like a virtual rack of equipment for each user. Admins can assign a preferred number between 1-128. Please keep POD numbers unique between users!

Step 11: Set user limitation to use eve resources. **"-1"** value is unlimited EVE resource. Only editor and User roles can be set for EVE resource limitation, Quota.

Example: editor user is allowed to run/create labs for x4 CPU and 8Gb RAM.



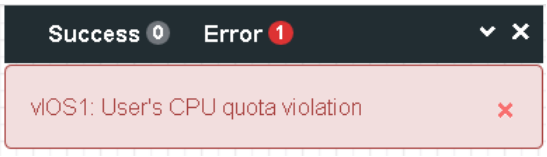


In case of violation these settings, user will receive alert message in the notification area:

Step 12: Press ADD 

7.3.1.2 Edit EVE User

Step 1: Open the User management submenu. Management -> User management and choose which user you want to edit.

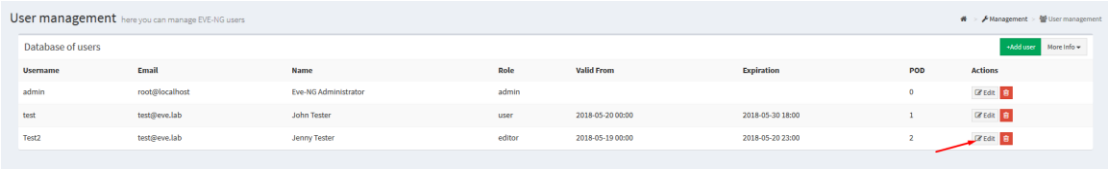

Step 2: The Edit user management window will pop up. Now you can edit necessary user information, roles, or access time. Confirm settings by pressing Edit at the bottom of the window.

© EVE-NG LTD

Edit User

User Name*

editor

External Auth (Radius)

Password

••••••••••••••••••

Password Confirmation

••••••••••••••••••

Email

admin@eve-ng.net

Please enter an valid email

Name

Editor uldis

Use only [A-Za-z0-9_-]chars

Role Lab Editor

Console any

Satellite sat1

Account Validity

From -1 0 to -1 0

POD*

2

Quotas


CPU 16 RAM (GB) 32

* - Required Fields

Save Cancel

7.3.1.3 User session termination


Administrator has rights to terminate active user session to the EVE server. Press Kick to disconnect user from EVE HTML session.



© EVE-NG LTD

7.3.1.4 User monitoring

There is a dropdown menu next to “Add User” called “More Info” that can provide additional information about your users. Click the checkbox next to the relevant information that you would like displayed. Additional columns will be added for each checkbox that is chosen.

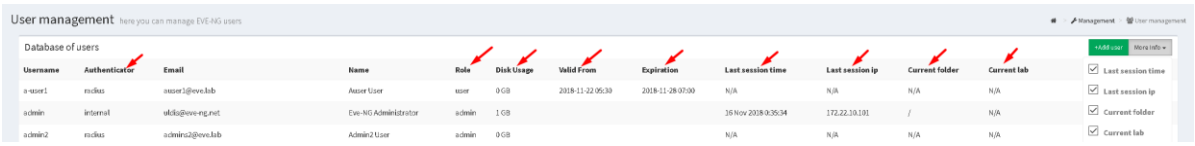


7.3.1.5 User role sticky lab


Sticky Lab. Applies for User role only. Set the specific Lab for the user, “sticky lab”. After login in the wEB, EVE User will directed only to this lab. He cannot close the lab to get in main Lab management page. User can Start/Stop/Wipe lab, as well save his lab work on the lab devices.

Pre-requisites for this feature: For Lab selection from the list, the Lab must be upload in the Shared folder by admin first. If Lab Menu is selected to “None”, User can close the Lab and open another shared Lab for him.

The value “None” is set as default.

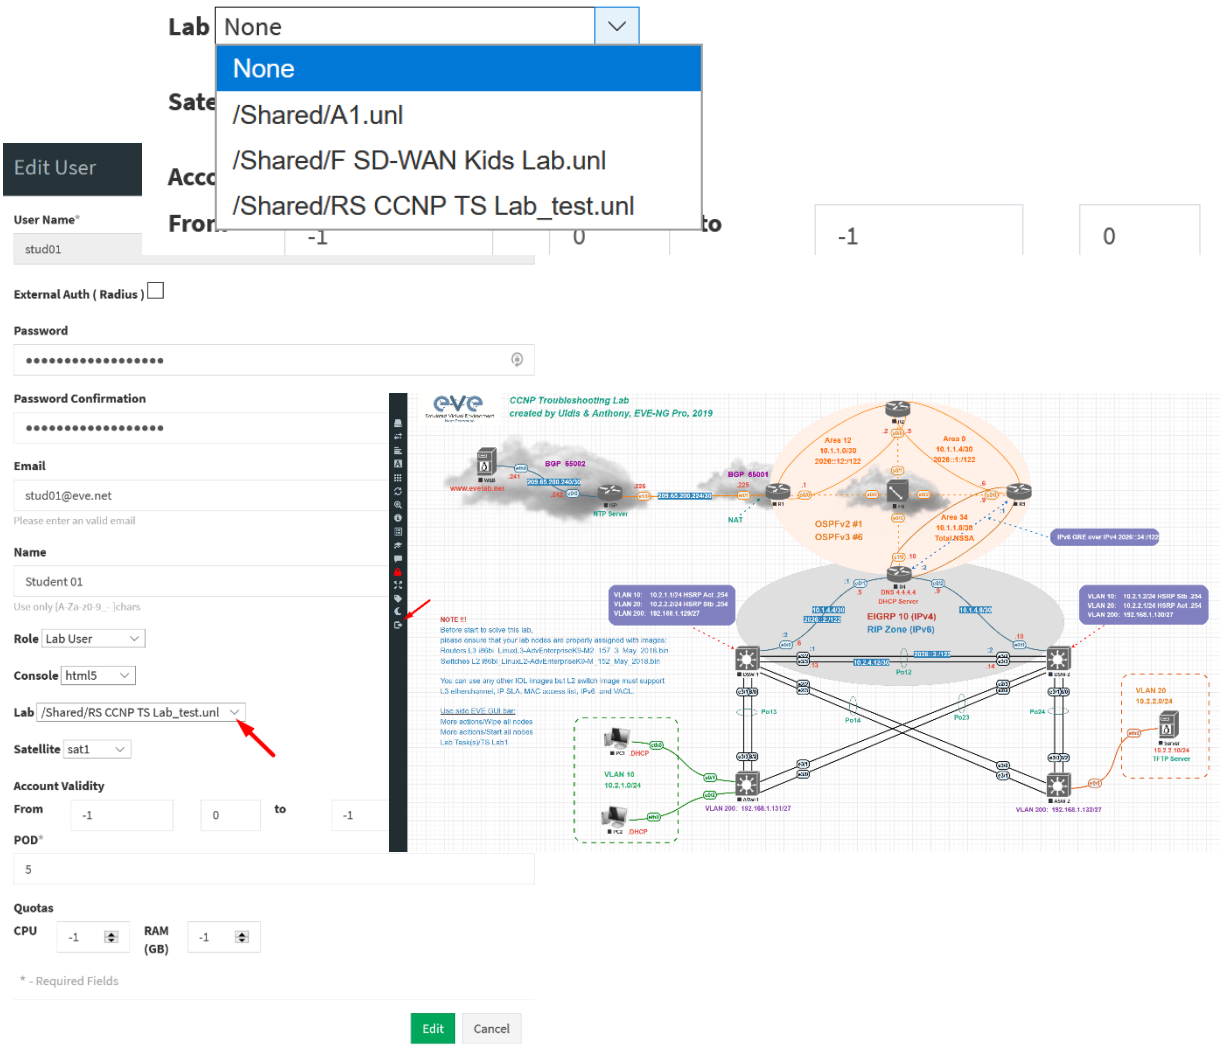


7.3.2 EVE Node management

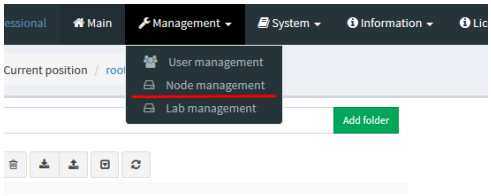

The Management dropdown has a submenu called "Node Management." The Node management menu displays all currently running nodes within EVE. Within this menu, an Admin account can manage or even console to any user's nodes.

⚠ NOTE: Editor and User accounts are able to see and open console sessions to their own running nodes only

⚠ NOTE: Admin accounts are able to see and open console session to all users running nodes

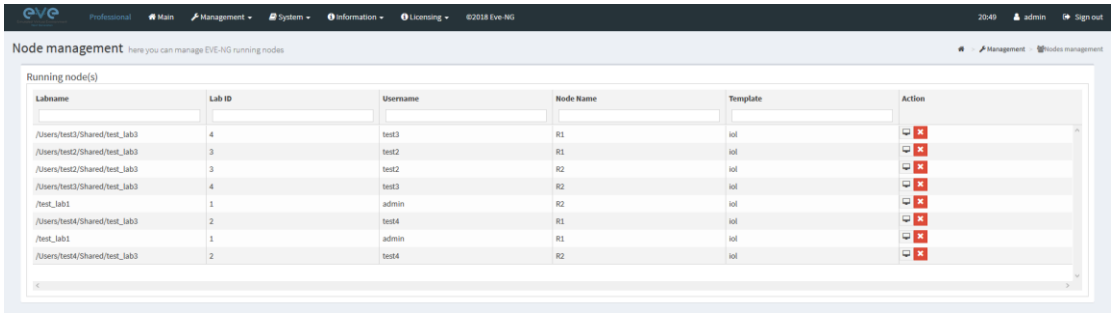


7.3.2.1 Node management actions

Button	***Action***
	Open a console session to the running node
	Stop the running node

7.3.2.2 Node management filtering function

Each column in the Node Management Menu has a field or sort sign that will allow you to filter the list to only display information related to the entered value.


Example: Click on "CPU Usage" The CPU column will sort running nodes with most CPU consummation on the top.

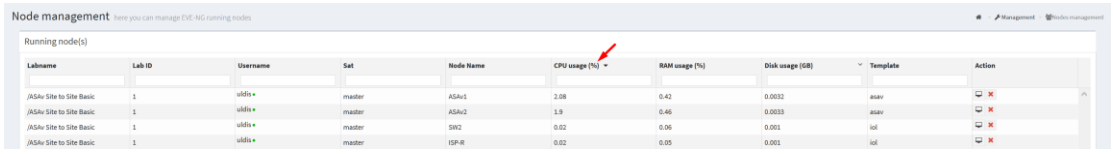


Each column can be sorted alphanumerically by clicking on the column name.

Example: click on the column Username and EVE will sort all running nodes in alphabetic order by username.

© EVE-NG LTD

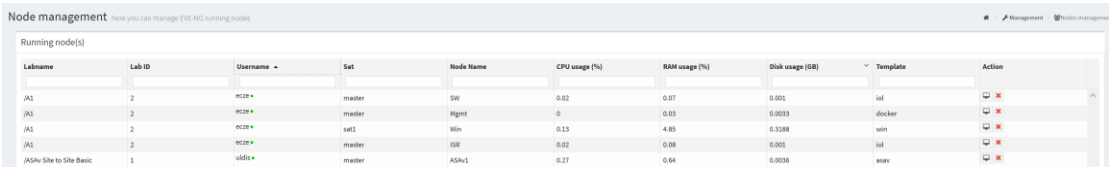

7.3.3 EVE Lab management

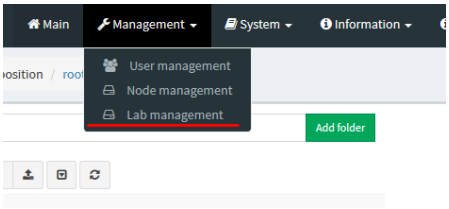


The Lab Management page, under the Management Dropdown, displays running or stopped labs for all users. In this menu an Admin account can manage or even open up any user's running labs. In the columns CPU and Memory usage will be displayed actual running lab CPU and RAM utilization.

⚠ NOTE: Only labs which are using space on EVE HDD will be displayed.


⚠ NOTE: Editor and User accounts are able to see and open their own running labs only

⚠ NOTE: Admin accounts are able to see, open, and join any users running or stopped lab.

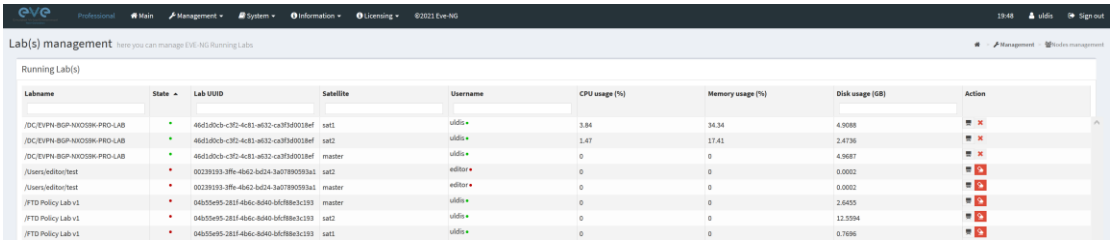

Several columns in the Lab Management Menu have a field that will allow you to filter the list to only display information related to the entered value.

Example: Enter username in the field to filter labs created by "admin"

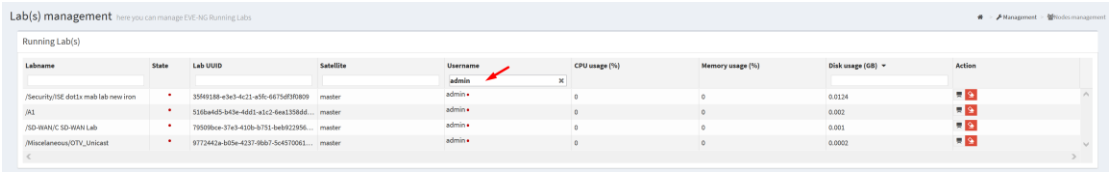


Example: Click State to sort running labs on the top.



Example: Click on "Disk Usage" sorting labs with most HDD usage on the top


© EVE-NG LTD

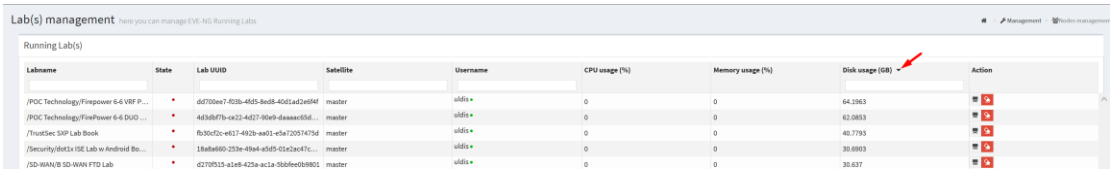


7.3.3.1 Lab management actions

Button	Action
	Open the running or stopped lab.
	Stop the running lab. The running labs will be displayed on top of list.
	Wipe lab. Clean up HDD space. NOTE: this action will delete saved lab configurations.

Once an admin has opened another user's running lab, that user's username will be displayed at the top of the left menu to help the admin keep track of which user's lab was opened.

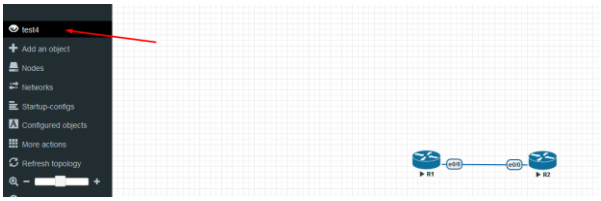


7.4 EVE System Dropdown menu

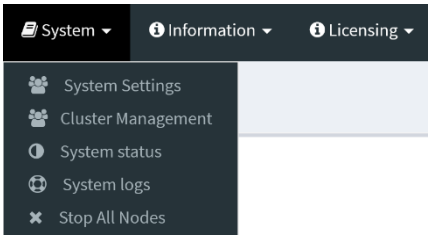


The EVE System dropdown contains the system settings, Cluster Management, system utilization status, log files, and an option to stop all running nodes on the server.

© EVE-NG LTD


7.4.1 System Settings



The System Settings page, under the System Dropdown, will show EVE System settings for:

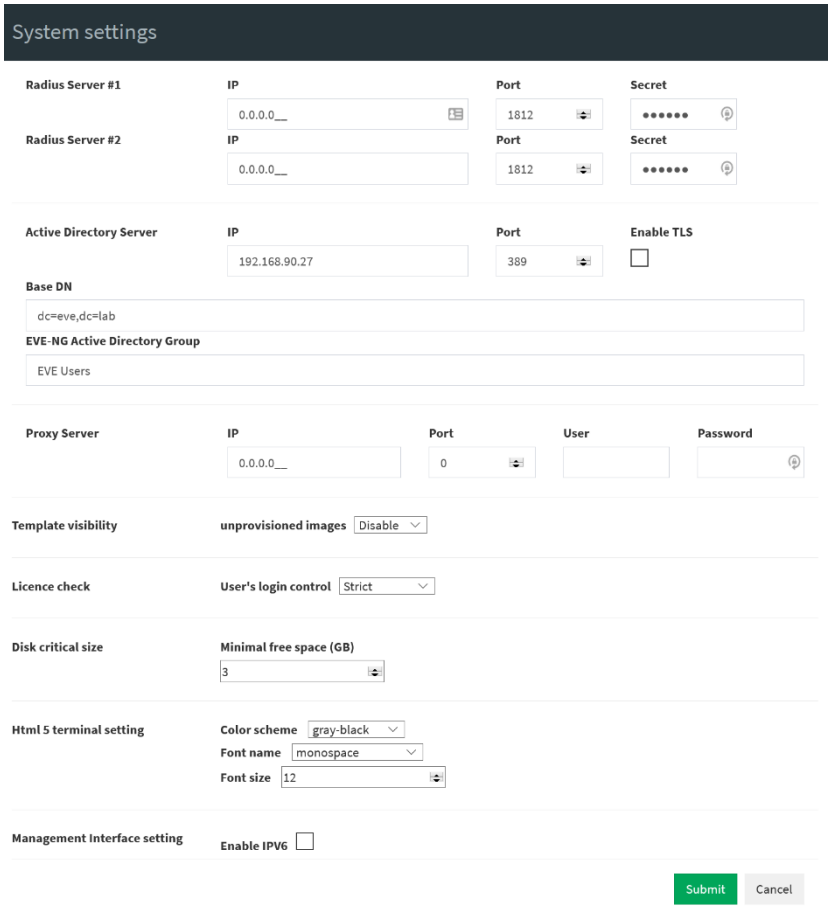


- External **Radius Server**, IP port and shared secret key
- **Active Directory** Authentication support
  - ✓ IP address of AD and port
  - ✓ For TLS Active directory communication option, select TLS
  - ✓ DN: Example if domain is eve.lab, then DN syntax is: dc=eve,dc=lab
  - ✓ EVE-NG Active Directory Group: Example: EVE Users. EVE will search Your Group name in whole domain folder tree.

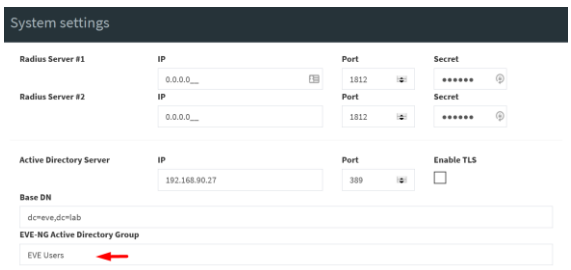


© EVE-NG LTD

Note: The username in of the Active directory user account must match with AD username. Username must have domain at the end of username. Example: evelabuser@eve.lab

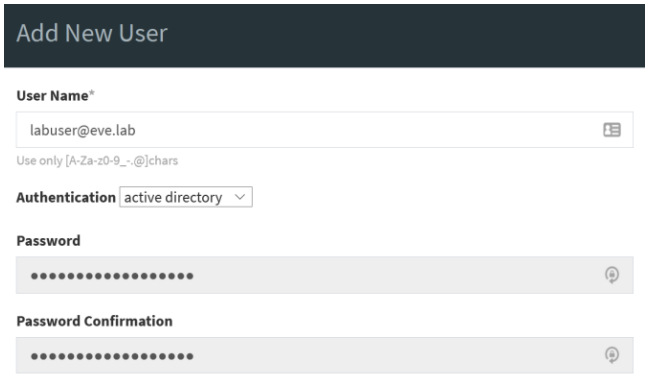



- **Proxy server** IP and port, for authenticated proxy use username and password
- **Template visibility** is default settings for templates list on topology. Disable state (default) will not show on topology Nodes list with unloaded images. In the Nodes list will appear only uploaded images. The checkbox “Show unprovisioned templates” will show all available image templates.

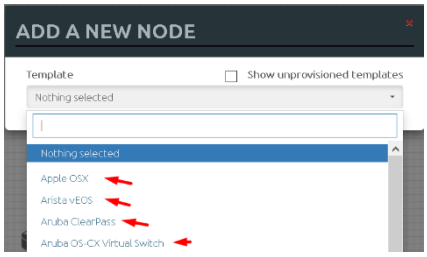

- **License check** is value where you can set EVE user session login behave.
  - ✓ The Value **Strict** does not allow user login if all available licenses have active sessions (screenshot below, Insufficient Licenses). If user has finished work with EVE server and closed browser, EVE server will clear this user connection session automatically after 1 minute.
  - ✓ The **Auto logout** will terminate oldest connected user session to the EVE server.


Note: Administrator has rights terminate any user session, please refer Section: 7.3.1.3



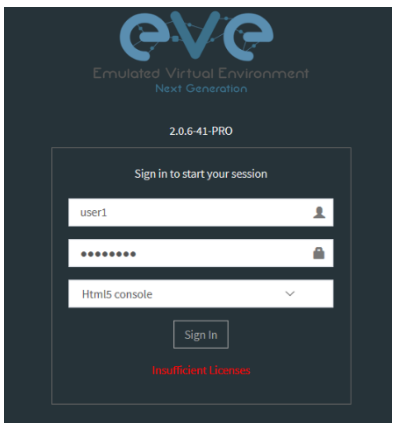


© EVE-NG LTD


- **Disk critical size** is value when EVE will start alert you about HDD space limit is reached. If you will set 5Gb value, your EVE will start show warning messages in notification area. Example is showing limit set to 500GB. Recommended is set 3-5 GB value.




- **HTML5 Terminal settings** Option to change console colour scheme, fonts, font size and backgrounds.



- **Management interface settings** Option to enable IPv6 on the EVE Management interface




7.4.2 Cluster Management




The Cluster Management page, under the System Dropdown, will show Cluster Management options, and cluster members resources utilization. Please refer to Chapter EVE Cluster System 15

7.4.3 System status




The System Status page, under the System Dropdown, will show EVE server resource utilization, the number of running nodes per template, current running versions of EVE and Qemu, and the current status of the UKSM and CPU Limit options.

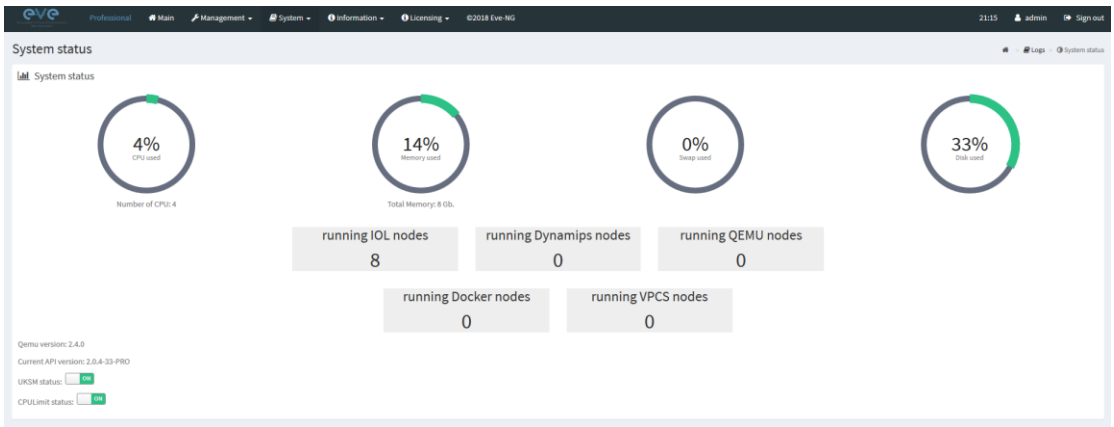

UKSM – “Ultra KSM (kernel same-page merging) is a Linux kernel feature that allows the KVM hypervisor to share identical memory pages among different process or virtual machines on the same server.” It can be disabled globally for EVE on this page. It is recommended to keep UKSM **enabled**.

© EVE-NG LTD

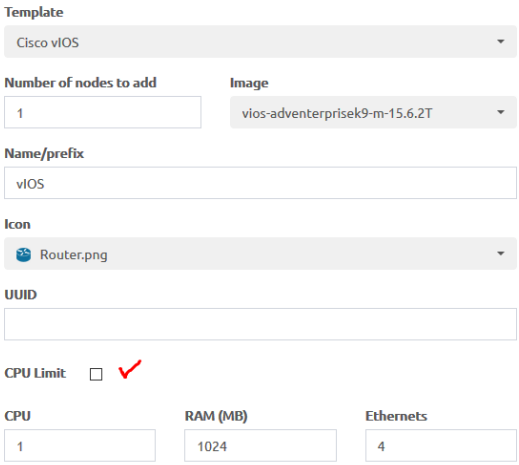

CPU Limit – CPU limit is used to limit CPU overloads during the nodes run time. It acts like a smart CPU usage option. If a running node reaches 80% CPU utilization, the CPU Limit feature throttles CPU use for this node to 50% until process usage drops under 30% for a period of 1 minute.


It is recommended to keep the Global CPU Limit option enabled.

CPU Limit can be turned for individual nodes in a lab. EVE node templates are set, by default, with the recommended CPU limit settings. An Unchecked CPU Limit option means that this node will boot without CPU limit.

Reference:


https://searchservervirtualization.techtarget.com/definition/KSM-kernel-samepage-merging

7.4.4 System logs

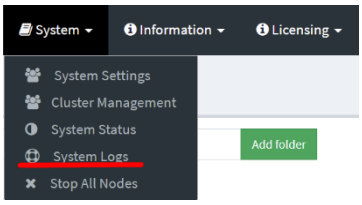


The System logs page, under the System Dropdown, will display EVE server log information

In the menu you can select a specific log file for inspection.

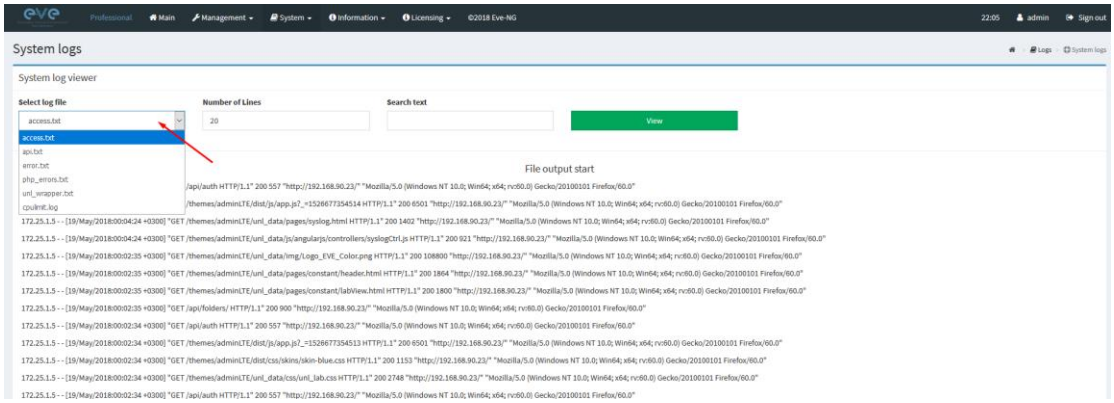

7.4.5 Stop All Nodes




The Stop All Nodes option, under the System Dropdown, is an option that stops all running nodes on the EVE server. This option is accessible only by Admin users.

Same can be achieved issuing cli command:

```
/opt/unetlab/wrappers/unl_wrapper -a stopall
```

© EVE-NG LTD

7.5 EVE Information Dropdown menu

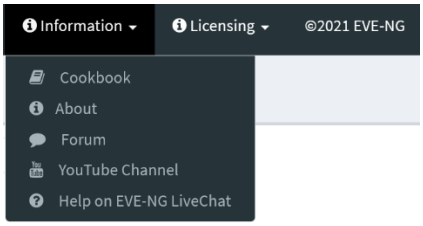


The Eve Information Dropdown contains links to the EVE Website, EVE forum, EVE YouTube channel, and the web-based EVE Live Help chat.

To join the EVE Forum, in order to make posts or download materials, a forum user account must be created.

To join the EVE Live Chat for support, please use your Google account for access, or create a new user account for this chat. Please note the forum and live chat use separate user accounts.


7.6 EVE Licensing Dropdown menu

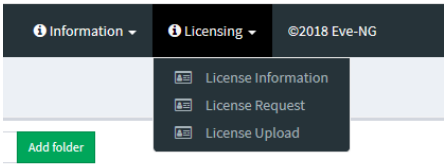

The EVE Licensing dropdown contains options for managing your EVE license.


The License Information Window will display the expiration date along with the number of licenses that have been activated

License information display:



For License Request and License Upload, please refer to section 4.5 for more information.

7.7 Other Tab line info




Other items on the top menu are: Real-time clock, a shortcut to edit the currently logged in user, and a sign-out button.

7.8 Lab preview and global settings

Once you click on a lab in the folder tree, a main window on the right side will display schematic content of the lab as well as lab management options like open, edit, and delete.


The actual lab topology appears after 3-5 seconds.

© EVE-NG LTD

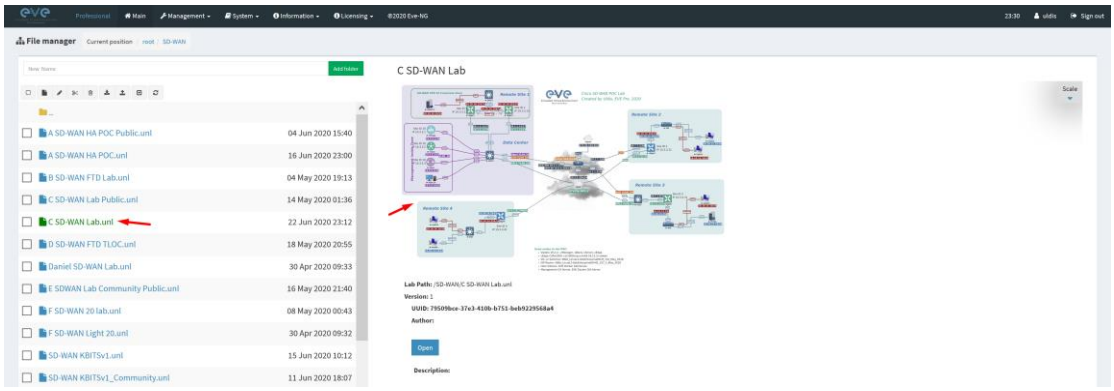

7.8.1 Lab preview window

The lab preview window displays the schematic position of nodes and their connectivity. The actual lab topology appears after 3-5 seconds. The Scale option allows you change the lab preview size.

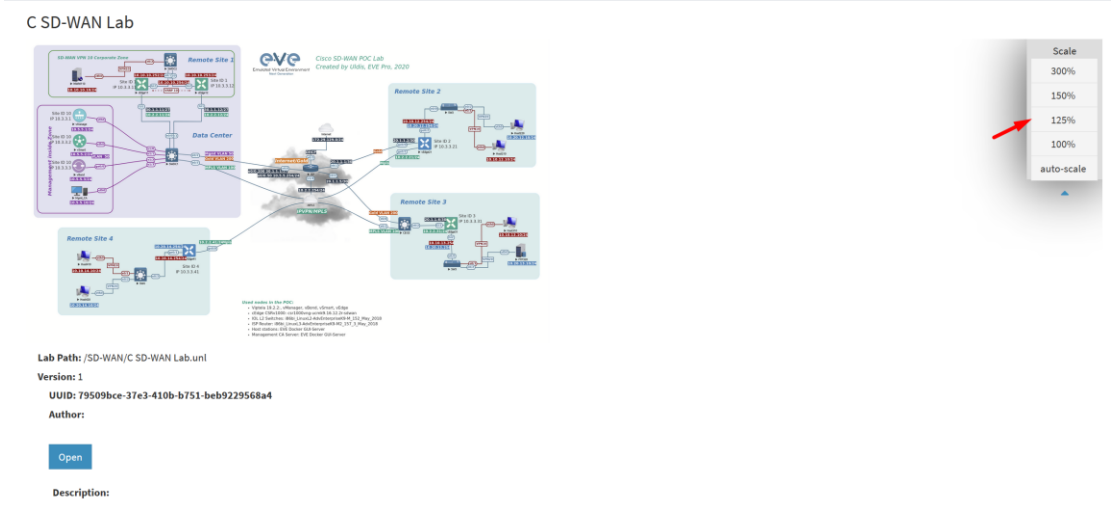

7.8.2 Lab preview buttons

In the lab preview, these buttons allow you to manage the selected lab.

Button	***Description***
Open	Opens the Lab to the Topology Canvas
Edit	Opens the Labs Global Settings. Refer to section 7.8.4 for more info.
Delete	Deletes the lab

© EVE-NG LTD


7.8.3 Lab preview information

Description, version, UUID etc.



7.8.4 Lab Global Settings

Lab Global Settings Page is opened when you click on  the Edit button below the Lab preview window.

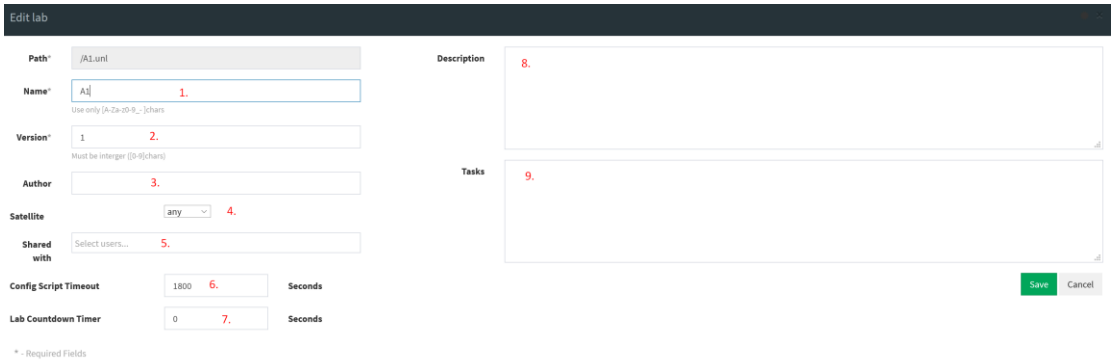

This page allows you to fill out important information about the lab. The red numbers in the picture correlate with the numbers listed below

1. Lab name.

2. Version: Version numbers allow a lab author to assign a value to a unique state of a lab. Increase the number to correspond to new developments in the lab. If left unfilled, EVE will assign a value of 1 automatically.

3. Author: You can add a lab author name in this field

4. EVE Cluster Satellite choice. By default, EVE will assign a value of “any” automatically. For cluster hierarchy please follow: Chapter 15.8.2

5. Lab sharing Feature, please follow Chapter 9.11


6. Config Script Timeout: It is the value in seconds used for the “Configuration Export” and “Boot from exported configs” operations. Refer to section 11.3 for more information.

7. Lab Countdown Timer: It is the value in seconds to provide a time limit (countdown timer) for completing a lab. Refer to section 11.4 for more information.


8. Description: In the Description field you can write a short description of the lab.

© EVE-NG LTD

9. Tasks: In the Tasks field you can write the task for your lab.




The Lab details window can be opened from the Topology Canvas page sidebar during labbing, to read the Tasks for the lab.

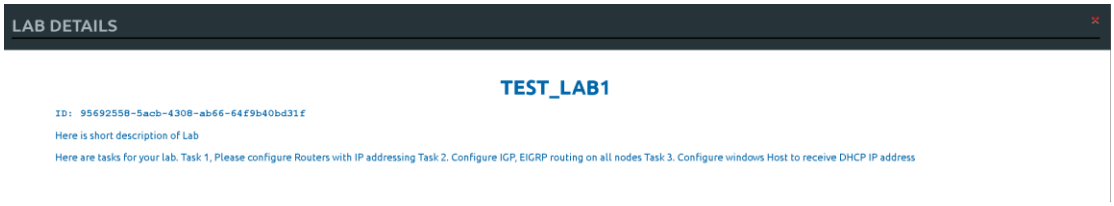

© EVE-NG LTD


8 EVE WEB Topology page

Once you open a lab, the topology page for that lab will open.

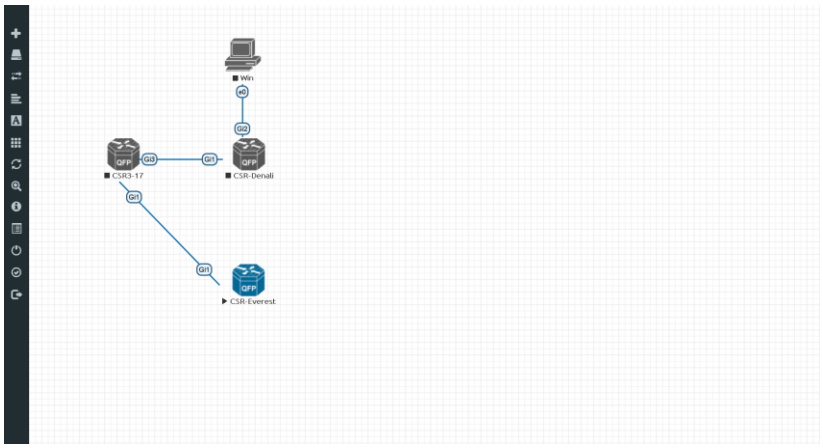

8.1 Side bar functions


Move your mouse pointer over to the left on top of the minimized sidebar to expand the interactive sidebar as shown in below screenshot

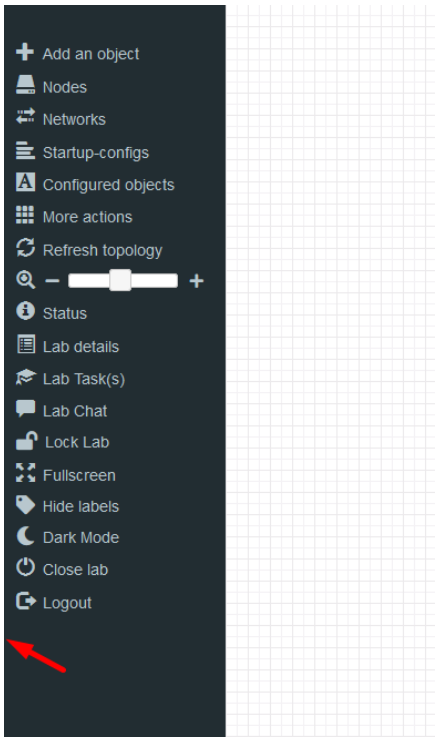

8.1.1 Add an object

The “Add an object” menu can be accessed in two different ways, from the sidebar and by right-clicking on the Topology Page

© EVE-NG LTD

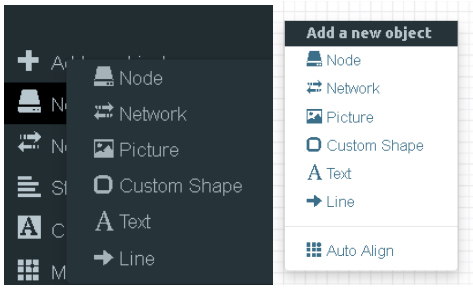


8.1.1.1 Node object

The Node object opens the “Add a new node” window. Only nodes that appear blue in the dropdown menu can be added. A grey image name signifies that you have not yet properly uploaded an image to the proper folder. A blue image name means that at least one image exists in the proper folder for this template. If the “Show unprovisioned templates” is checked, EVE will display unloaded image templates. To hide it, uncheck “Show unprovisioned templates” checkbox or follow section Error! Reference source not found.

8.1.1.2 Network object


The Network object opens the “Add a new network” window. This function is used to add any kind of network (Cloud, Bridge or NAT). For details on these, please refer to section **10**


© EVE-NG LTD

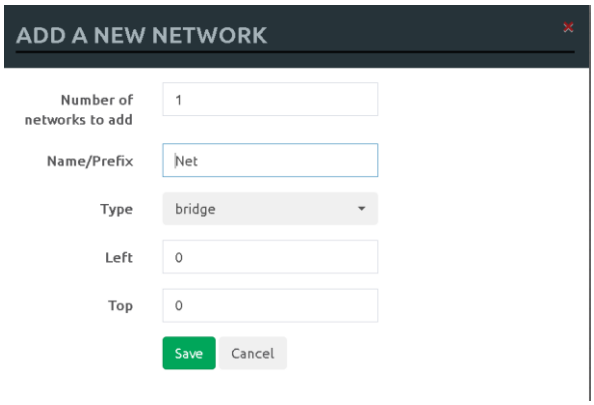

8.1.1.3 Picture object

The picture object opens the “Add Picture” window and allows you to upload custom topologies in jpg or png format. After uploading, you can edit these pictures and map selected areas to nodes from the topology to use your own designs as a lab topology from which you can directly connect to the nodes. For details, refer to section 11.2

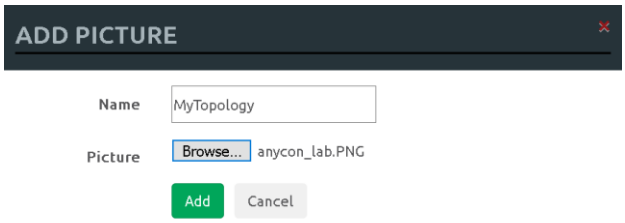


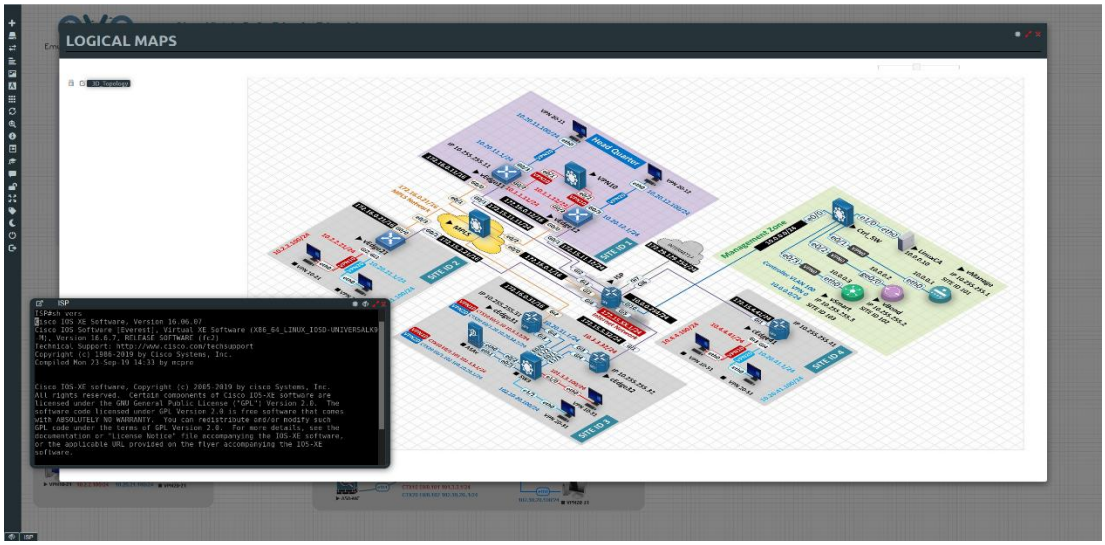

8.1.1.4 Custom shape object


The Custom shape object allows you to add shape elements onto the topology; these currently include squares, round squares and circles. For details, refer to section 11.1

© EVE-NG LTD

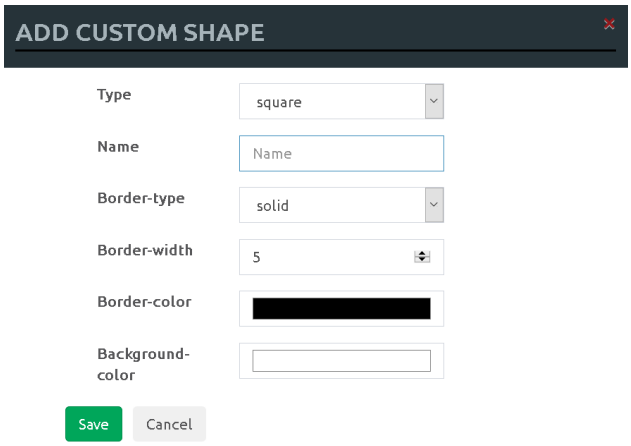


8.1.1.5 Text object

The Text object allows you to add MS Office elements onto the topology. For details, refer to section 11.1.3

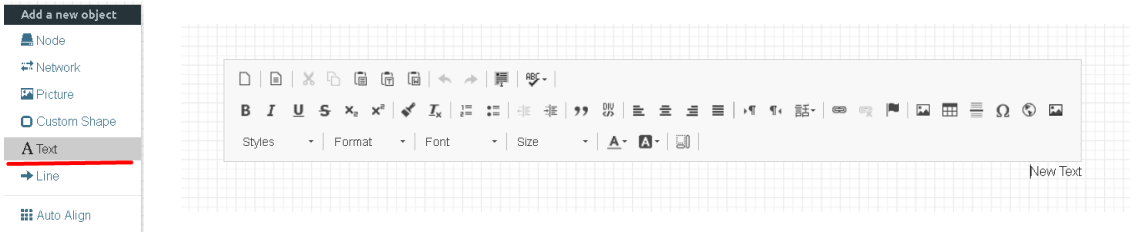

8.1.1.6 Line object

The Line object allows you to add line elements onto the topology; these currently include single arrow, double arrows and simple lines. For details, refer to section 11.1

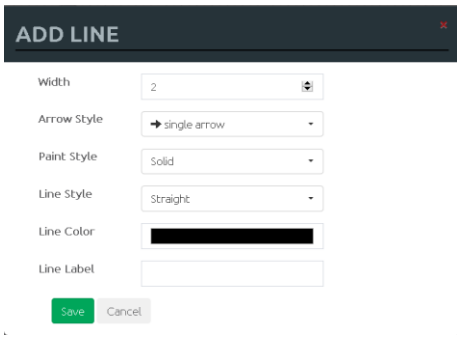


8.1.2 Nodes



The Nodes object in the sidebar opens the “Configured Nodes” window.

© EVE-NG LTD

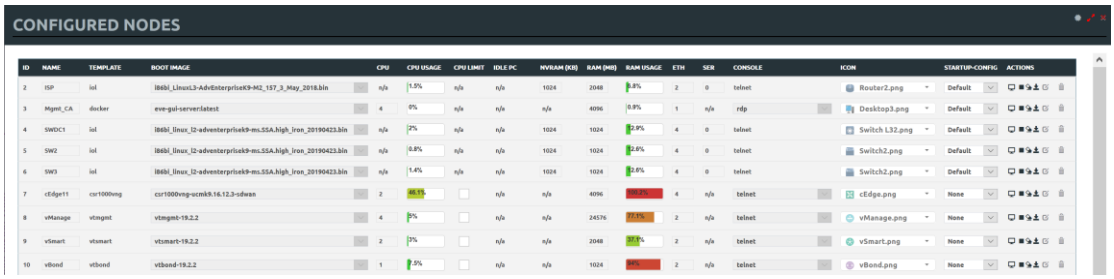

In this window, you can make changes for nodes that are on the lab topology. More options can be found in the detailed node specific menu, for details refer to section 9.1.2.

⚠ NOTE: Running nodes are highlighted in Blue, their settings cannot be changed. You can only change settings of nodes that are not currently running.

You can change the following values:

- Node Name
- Boot image
- Number of CPUs for the node
- Live CPU usage
- Enable or disable CPU Limit (Refer to section 7.4.3)
- IDLE PC for Dynamips node
- NVRAM in Kbyte
- RAM in Mbyte
- Live RAM usage
- Ethernet quantity. **NOTE:** The Node must be disconnected from any other nodes to make this change. You cannot change the interface quantity if the node is connected to any other node.
- Serial interface quantity, IOL nodes only. You cannot change Serial interface quantity if the node is connected to any other node.
- Type of Console
- Node Icon that appears on the Topology
- Startup configuration to boot from


Actions Buttons (Stopped node):



- Start node
- Stop node
- Wipe node
- Export the nodes config
- Networks
- Edit node
- Delete Node

Actions Buttons (Running node):

© EVE-NG LTD




- Console to the node
- Stop node
- Wipe node
- Export the nodes config
- Edit node
- Delete Node


8.1.3 Networks



The Networks object in the sidebar will open the “Configured Networks” window.

The “Configured Networks” window will only show networks that were specifically added to the topology; it will not show node interconnections. The example below is showing information for networks on the Topology. For Cloud networks and how to connect EVE labs to a network external to EVE, please refer to section 10

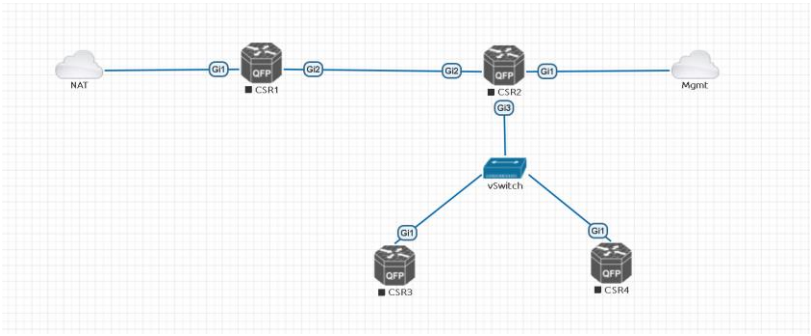


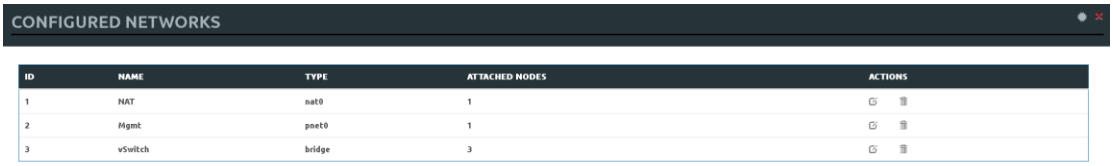



- Edit Network
- Delete Network

8.1.4 Startup-configs




The Startup-configs object in the sidebar opens the “Startup-configs” window.

© EVE-NG LTD

This window will show you startup-config for each node (for PRO it shows the startup configs of the current config set) and if the node is set to boot from it (ON) or not (OFF).

The “Startup-configs” window in the EVE Professional version contains additional features, please refer to section 11.3.

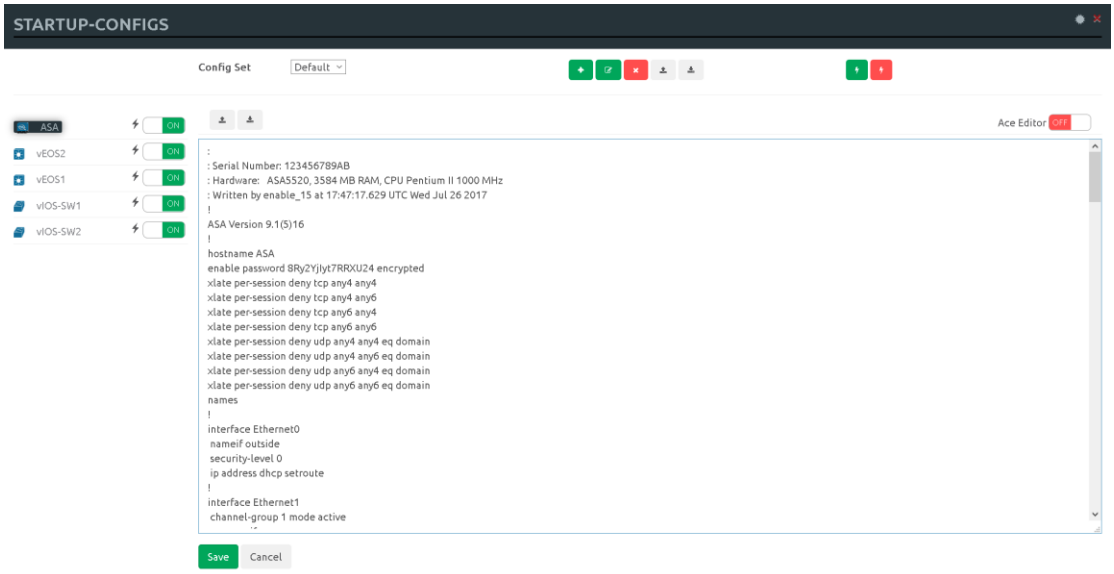


8.1.5 Logical Maps



NOTE: The Logical Maps object will only appear in the sidebar after you have uploaded a custom topology picture to the lab EVE lab (Please refer to section 8.1.1.3). The Pictures object in the sidebar opens the “Picture Management” window.


For details on the Picture / custom topology feature, refer to section 11.2

8.1.6 Configured Objects



The “Configured Objects” window will display a list of all objects that are added onto the topology. For details on different objects, refer to section 11.1


NOTE: You will not see any objects in this window if none have been added to the lab yet.




8.1.7 More actions

The More actions menu in the sidebar has a submenu with the following functions.

© EVE-NG LTD

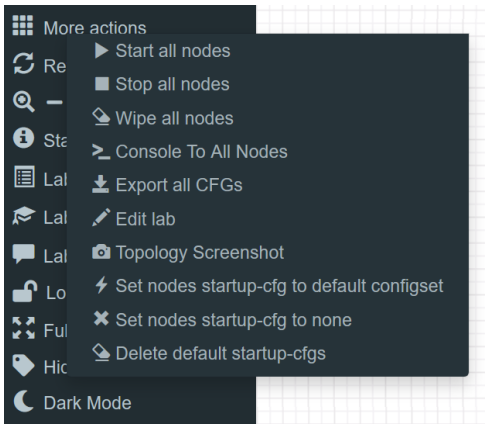

8.1.7.1 Start all nodes



The “Start all nodes” action will start all nodes on your topology, taking the (configurable) startup delay of each node into consideration.

⚠ IMPORTANT. Starting many nodes at once can seriously spike your CPU utilization. Please make sure that you are not using the “Start all nodes” option for heavy labs or that you have configured a proper delay between the nodes. For heavy nodes and large quantities, it is recommended to start them in smaller groups, wait for them to finish booting and then start another small group of nodes.


8.1.7.2 Stop all nodes



Stopping all nodes will power off all nodes on your topology.

⚠ NOTE: It is recommended to save your (running) configurations on the nodes in your lab before you stop the lab if you want to continue where you left off the next time. Stopping the nodes will leave the images in a temporary folder and will take up space on your drive until they have been wiped.

8.1.7.3 Wipe all nodes



The “Wipe all nodes” action will wipe the NVRAM or currently saved image of all your nodes in the current lab.

Example: You have saved the nodes configuration by saving the running configuration to the startup configuration. The Wipe command will delete the saved NVRAM startup configuration and on the next boot it will boot from factory defaults.

The same applies to images without configurations, e.g. a linux node. If you make modifications to the system and afterwards wipe this node, the next time it will boot from the original base image again as the modified image was deleted.

The “Wipe node” action is commonly used with initial startup configuration modifications. The Wipe node action does not delete configured startup configurations or sets. Please refer to section 11.3

© EVE-NG LTD

8.1.7.4 Console to All Nodes



"Console to all nodes" will open a console to all of your running nodes in the current lab. This includes all different kinds of configured console types for lab nodes like VNC, Telnet and RDP.

8.1.7.5 Export all CFGs



The "Export all configurations" action will export current configs to the EVE startup-configs.

Export configurations are supported for:


Cisco Dynamips all nodes	Juniper VRR
Cisco IOL (IOS on Linux)	Juniper VMX
Cisco ASA	Juniper vMX-NG
Cisco ASAv	Juniper vQFX
Cisco CSR1000v	Juniper vSRX
Cisco Nexus 9K	Juniper vSRX-NG
Cisco Nexus Titanium	Mikrotik
Cisco vIOS L3	PFsense FW
Cisco vIOS L2	Timos Alcatel
Cisco XRv	vEOS Arista
Cisco XRv9K	

For a full explanation of exporting configurations, please refer to section 11.3


8.1.7.6 Edit lab




Opens the Edit lab window. Refer to section: 7.8.4

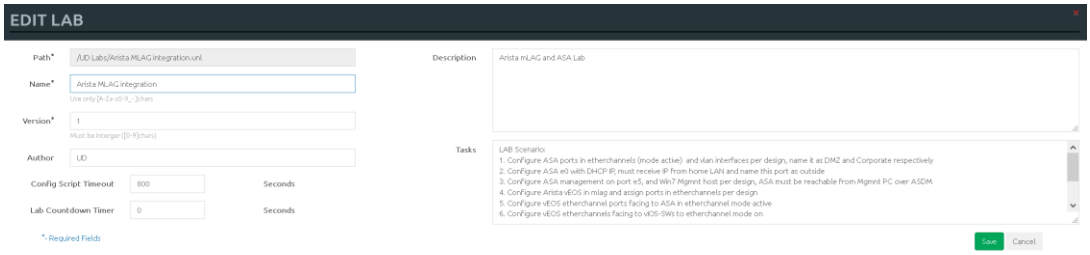


8.1.7.7 Topology screenshot



Feature to export actual topology in png format



8.1.7.8 Set node's startup-cfg to default configset



Sets nodes to the default startup-config. NOTE: If you have nothing saved in the default config set for any node, that node will boot from factory default instead. This is commonly used with the wipe nodes function so the node will boot from the configured startup-config on next boot and not from the startup-config in its NVRAM in case the node was started before already.

© EVE-NG LTD

Please refer to section 11.3

8.1.7.9 Set node's startup-cfg to none



Setting all lab nodes to boot from factory default. Used commonly with the wipe nodes function. The example below shows the steps to set a lab to boot from factory default.

Step 1: Wipe all nodes
Step 2: Set all nodes to startup-cfg none

Please refer to section 11.3

8.1.7.10 Delete default startup-cfgs



⚠ WARNING: this action will delete all configurations saved to your saved default config set. Please make sure that is what you want to do before you execute this.

8.1.8 Refresh Topology




Sometimes it is necessary to refresh the topology if many objects are added on the topology.

8.1.9 Lab page zoom/unzoom



This action is used to zoom or unzoom a large topology in EVE.

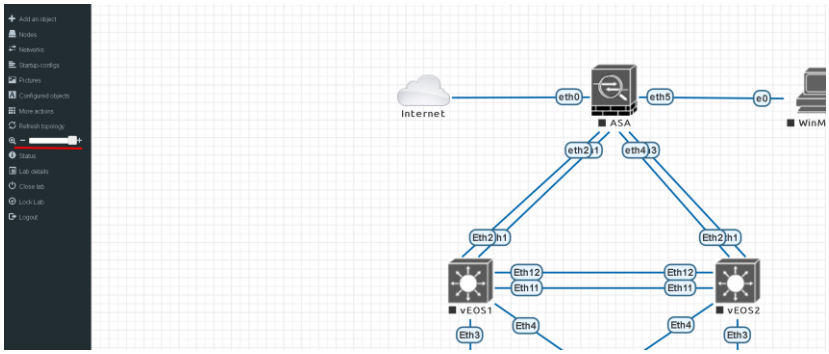


8.1.10 Status



Opens the EVE Status window.

Especially useful while working with labs to monitor your EVE's resource utilization. It shows EVEs CPU, RAM and disk utilization in real time. You can also see the number of running nodes per node type. For details on UKSM and CPU Limit, please refer to section 7.4.3


© EVE-NG LTD

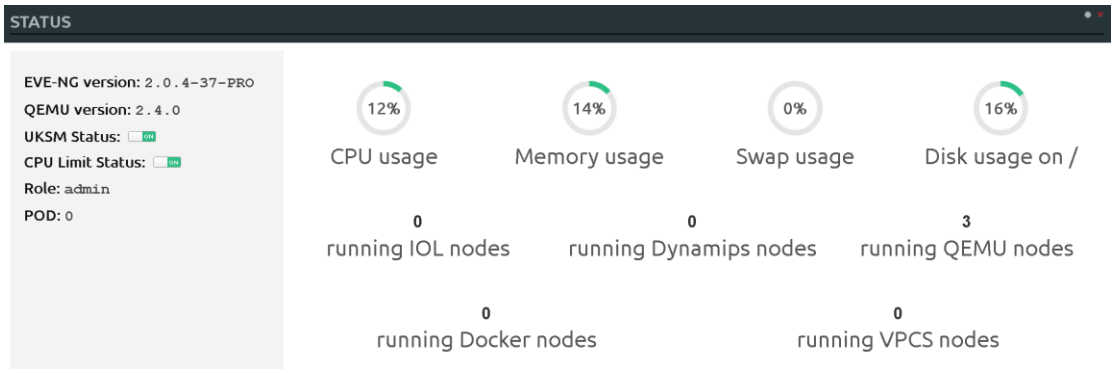


8.1.11 Lab details



Lab details display information about a lab, its UUID, description and lab tasks. To edit the lab description and lab tasks, please refer to section 7.8.4 and 8.1.7.6

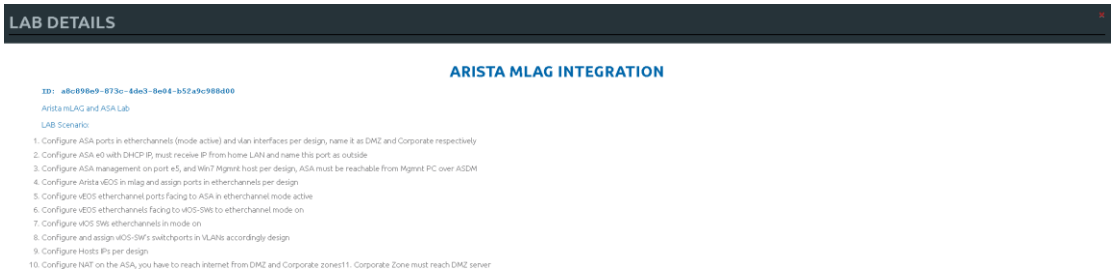

8.1.12 Lab Tasks




Opens a Lab Task feature. The EVE LabTasks is a feature that allows users (including admins and editors) to to create task or workbook for the Labs. Detailed how to create lab workbooks please refer Secton 11.5

8.1.13 Lab Chat




Opens a Lab chat session between users on the same EVE server. To activate the chat, click "Lab Chat" on the sidebar. To close and exit from the chat, click "Lab Chat" on the sidebar again. The EVE Lab chat is a feature that allows users (including admins/teachers) to communicate with each other during lab sessions.

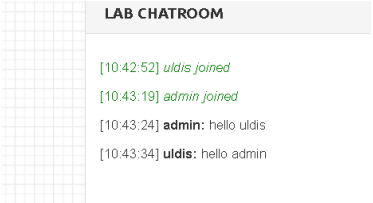


8.1.14 Lock Lab with password

“Lock Lab” disables some of the functions on the lab topology. If the lab is locked, you cannot move any node or object nor edit any node settings. Basically, the whole lab will be in read-only mode except for the lab settings itself, which you can still edit as Administrator or Editor from the main menu. The Lock Lab function is also used in conjunction with the countdown timer function, for details on this please refer to section 11.4

© EVE-NG LTD


 Lab is unlocked and all operations are working	 Enter and confirm your lab lock password

To unlock a Lab, simply press on the red “Unlock Lab” button with an Administrator or Editor account.

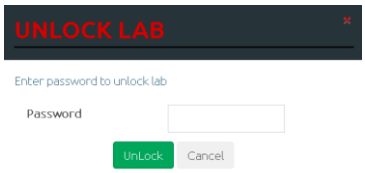 Lab is locked and all operations are restricted	 Enter lab unlock password to unlock lab.



Warning: Please remember your Lab lock password. In case of a lost password, you will not be able to recover it. Unlocking a lab / removal of password can be done by EVE-NG support only.

8.1.15 Fullscreen





“Fullscreen” Fullscreen function is stretching your lab to the full monitor screen. To get back to normal web screen hit “ESC” or press “Fullscreen” again.

8.1.16 Hide interface labels

 Hide interface labels for lab nodes	 Show interface labels for lab nodes

8.1.17 Dark mode or Light mode

 Sets your lab background to the dark mode	 Sets your lab background to light mode

© EVE-NG LTD

8.1.18 Close lab



Closes the lab topology. The lab can be closed while the nodes in the lab are still running as well. It will appear as running lab under the Running folder. Please refer to section 7.2.1.1

8.1.19 Logout




Log out from the EVE WEB GUI session.

8.2 EVE Lab topology menus

Right-clicking within the EVE topology can open new menus with various functions and options for managing nodes.


8.2.1 Lab topology menu



Right-clicking on the (free/unused) canvas of the EVE topology opens a new menu. (Add-) Node, Network, Picture, Custom Shape and Text are the same functions referred to in section 8.1.1.

Auto Align. This function will help align objects on the topology. The lab creator does not need to worry about small displacements of objects. AutoAlign will align all objects to a virtual grid with a single click and can make neatly arranged labs look even neater.


8.2.2 Connection menu




Right-clicking on the connection between nodes allows you to delete this connection.


8.2.3 Cloud or Bridge network menu

Right-clicking on a Cloud or Bridge network allows you to edit or delete it.

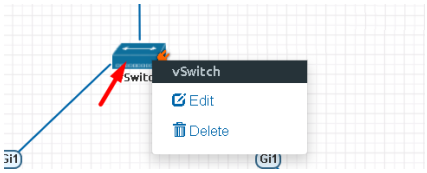



© EVE-NG LTD

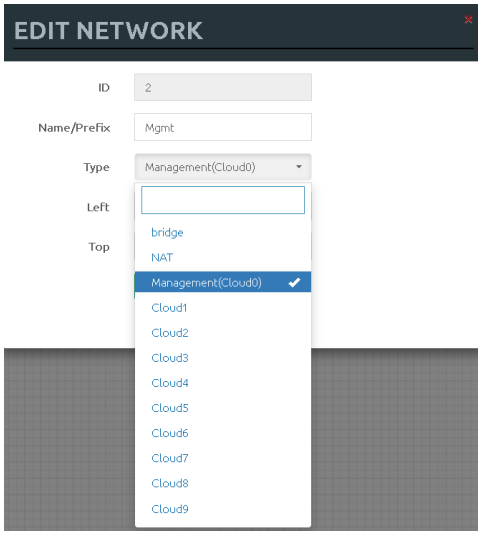


If you have chosen Edit, the Network edit window will open a window where you can change the placement, network type or name/prefix.

For details on how to operate EVE Cloud networks and external connections, please refer to section 10

8.2.4 Stopped node menu

Right-clicking on a stopped node also opens a menu:

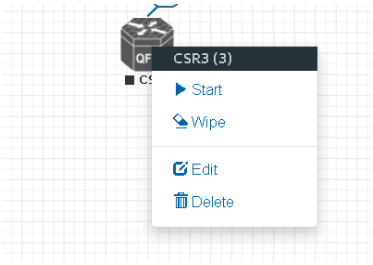


Start node: This will start the selected node in this lab

Wipe node: Wiping a node will erase the NVRAM (running config) or the temporary image snapshot depending on the type of node. This option is used to clean up a node in order to boot it from factory defaults or a custom set of configurations.


Edit node: Opens the Edit node window (picture on the right). For details please refer to section 9.1.2

Delete node. Deletes the node from the lab. It is recommended to disconnect (delete connections to it) the node before you delete it.

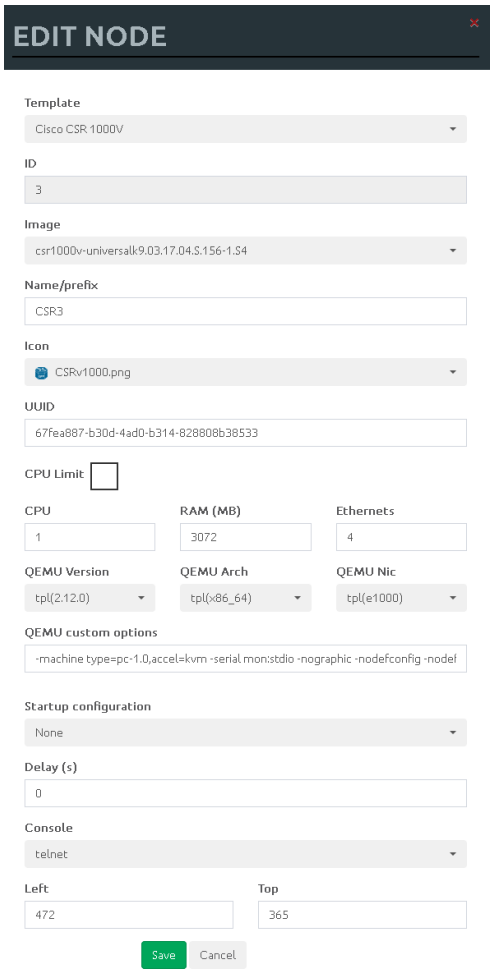


© EVE-NG LTD

8.2.5 Running node menu



Right-clicking on a running node also opens a menu:




Stop. Blue arrow: clicking on Stop will stop the node depending on the method the node supports (power off / shutdown are auto-selected based on the template)

Stop menu. Red arrows: There are more options to stop a node, clicking on the chevron on the left side of “Stop” opens a submenu.


- **Shutdown**: Perform an orderly shutdown of the node if that node supports it (shutdown signal is sent down to the node)
- **Power off**: Kills the running nodes process within EVE (hard poweroff).
- **Hibernate.** Save Node state (Disk and Memory are saved in an internal snapshot). Used for fast boot of a node. The hibernation process can take some time. Once the hibernation process is completed, the node will turn grey (shutdown state).

Wipe node: Wiping a node will erase the NVRAM (running config) or the temporary image snapshot depending on the type of node. This option is used to clean up a node in order to boot it from factory defaults or a custom set of configurations.

Export CFG: This function is used to export the saved running configuration to the EVE startup configuration sets. Reference section 11.3



Capture. Integrated live Wireshark capture. Select the interface which you wish to capture. Reference section 12




Graph. Integrated live interface activity monitoring. Displaying live interface utilization activity.

© EVE-NG LTD




8.2.6 Selected nodes menu and features

It is possible to select many objects or nodes at once in EVE. Using your mouse, you can select an area which will cover your nodes and/or you can click on nodes while holding the CTRL key on your keyboard.

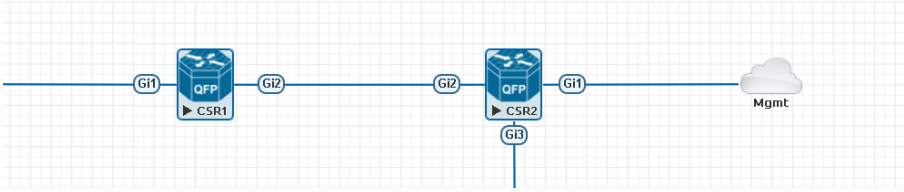

A right-click on any of the selected nodes opens a group menu:

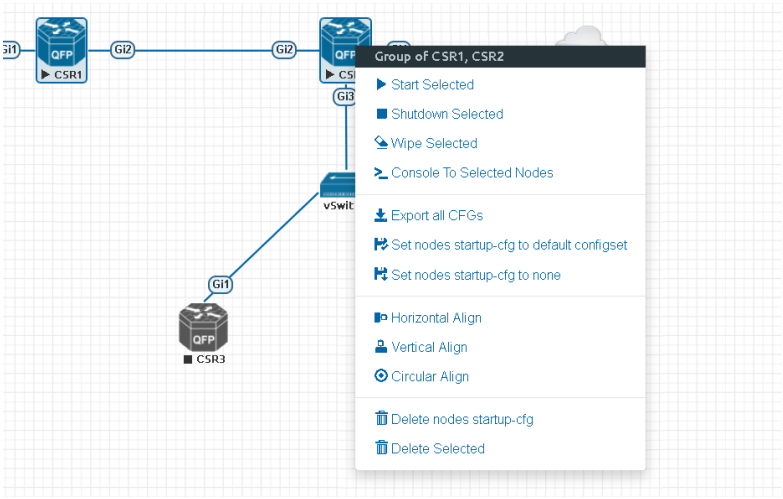

Start Selected: This will start the selected nodes in this lab**.**

Stop Selected: This will stop the selected nodes in this lab

Wipe Selected: The Wipe Selected nodes action will wipe the NVRAM or currently saved image of the selected nodes in the current lab.

Example: You have saved the nodes configuration by saving the running configuration to the startup configuration. The Wipe command will delete the saved NVRAM startup configuration and on the next boot it will boot from factory defaults.

The same applies to images without configurations, e.g. a linux node. If you make modifications to the system and afterwards wipe this node, the next time it will boot from the original base image again as the modified image was deleted.

The Wipe node action is commonly used with initial startup configuration modifications. The Wipe node action does not delete configured startup configurations or sets. Please refer to section 11.3

© EVE-NG LTD

Console To Selected Nodes: Console To Selected Nodes will open a console to all selected running nodes in the current lab. This includes all different kinds of configured console types for lab nodes like VNC, Telnet and RDP

Export all CFGs: The Export all configurations action will export current configs of selected nodes to the EVE startup-configs.

For a full explanation of exporting configurations, please refer to section 11.3

Set nodes startup-cfg to default configset: Sets nodes to Default startup config, used commonly with the wipe nodes function. NOTE: If you have nothing saved in the default config set for any node, that node will boot from factory default instead. This is commonly used with the wipe nodes function so the node will boot from the configured startup-config on next boot and not from the startup-config in its NVRAM in case the node was started before already.

Please refer to section 11.3

Set nodes startup-cfg to none. Setting selected lab nodes to boot from factory default. Used commonly with the wipe nodes function. The example below shows the steps to set selected nodes to boot from factory default.

Step 1: Wipe selected nodes
Step 2: Set nodes startup-cfg to none


Please refer to section 11.3

Horizontal Align. Aligns the selected nodes in one horizontal line.

Step 1: Select the nodes you wish to align.

Step 2: Right click on one of the selected nodes and choose Horizontal align, this will align all nodes to the selected node.

Picture before:

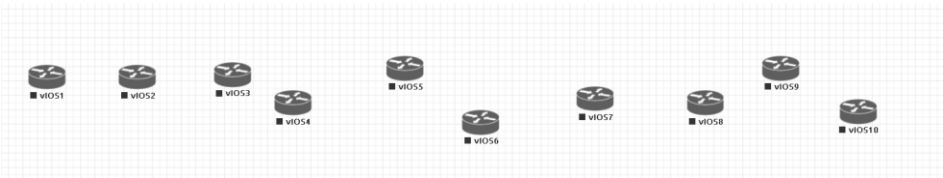

Picture after:




Vertical Align: Aligns the nodes in one vertical line.

Step 1: Select the nodes you wish to align.

Step 2: Right click on one of the selected nodes and choose Vertical align, this will align all nodes to the selected node.

Picture before **Picture after**

© EVE-NG LTD

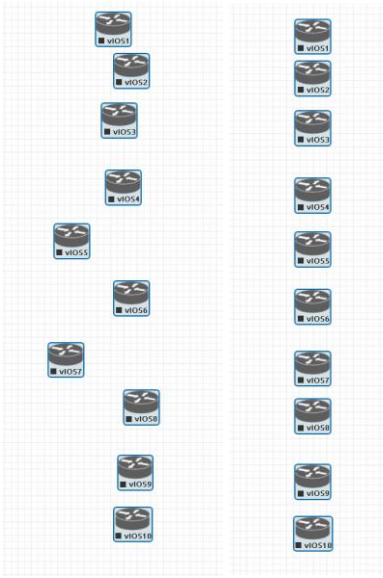


Circular Align: Aligns the nodes in a circle.

Step 1: Select the nodes you wish to align.

Step 2: Right click on one of the selected nodes and choose Circular Align, this will align all nodes in a circle, the midpoint of the circle will be at the coordinates the selected node was at before.

Picture Before **Picture After**

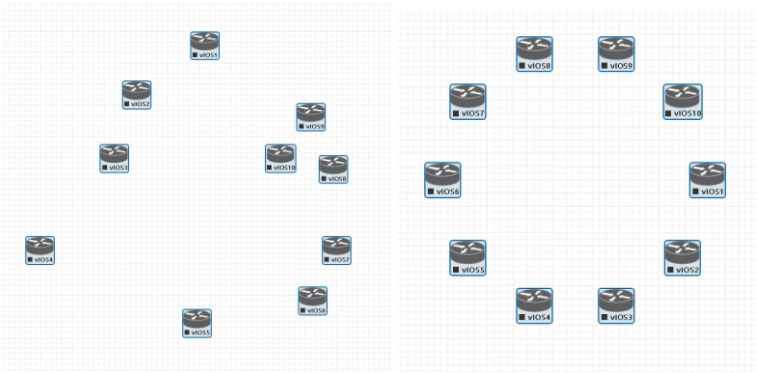

Delete nodes startup-config.


> ⚠ WARNING, this action will delete the configurations of the selected nodes that are saved to your Default config set. Please make sure that is what you want to do before you execute this.

Delete selected: This will delete the selected nodes from your current lab.

Selected nodes can be moved as a group across the topology.


Example: You can select nodes and objects to better position them on the Topology.

© EVE-NG LTD

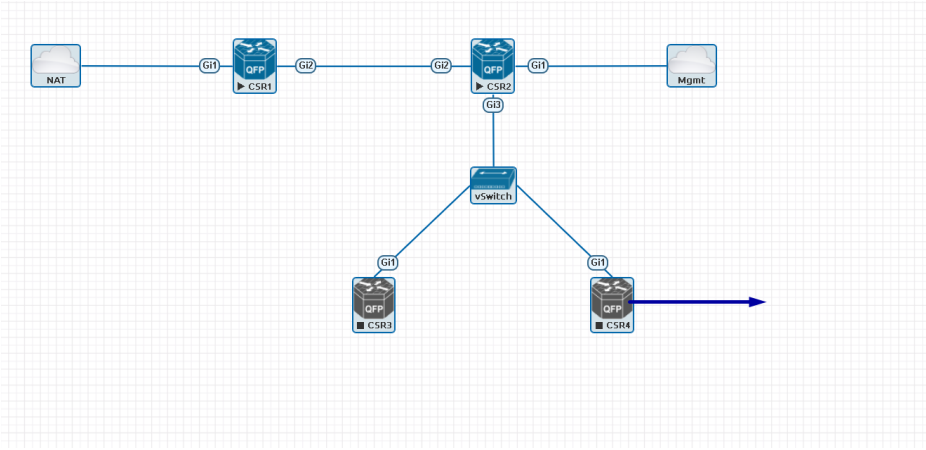


8.3 EVE Lab node states and symbols

8.3.1 Stopped (non-running) nodes



Grey colour and a square symbol below a node means that the node is stopped and not running. Once you will start it, the node will change to one of the running states below.



A grey node with an exclamation mark inside a triangle below the node means that there was a problem during the boot process, this could be a corrupted boot image, insufficient resources or problems with the initial configuration. A node in this state cannot be started again.

Workaround: Right-click on the node and wipe it, the symbol will then change to a grey colour with a square symbol below it. Then edit the node and make sure you have configured sufficient resources and the correct settings for this node, if it has startup-configs you can check them as well. Afterwards start the node again.


8.3.2 Running nodes



The blue color and black Play triangle symbol means that the node is started and running, the node is in a working/functional state.



A running node with a clock symbol below the node means that the node is waiting to finish loading from the set exported/startup configuration. Once the configuration has been successfully applied, the node symbol will change to a Play triangle symbol. If the node has finished booting but the clock symbol does not change to the Play triangle symbol, the problem could be in the uploaded startup configuration. For how to use exported configurations and boot nodes from them, please refer to section **11.1**



A running node with a turning red gear symbol means that the node is either in the process of hibernating the node or it has sent the shutdown signal to the node and is waiting for it to turn off. Once this process has successfully finished, the symbol will turn into a grey node with a black square symbol below it (stopped state).


⚠ NOTE: If the node does not support a system shutdown or does not recognize the shutdown signal (example: Cisco router), after clicking on Shutdown, the node can

© EVE-NG LTD

stay with a turning red gear symbol below it indefinitely.
Workaround: Use Stop or Stop/PowerOff to stop the node.

Example nodes where Stop/Shutdown is supported: Microsoft Windows and most Linux nodes as well as a lot of appliances based on linux.

8.3.3 Node connector symbol



Connector symbol: If you move your mouse pointer on top of a running or stopped node, an orange connector symbol appears. It is used to connect nodes on the topology in a drag and drop style. Drag the symbol from one node and release the mouse pointer on the second node. A new window will appear where you can select the interfaces the link should connect to.


8.4 Other

8.4.1 Notifications area



The Notification area in the top right is displaying informational or error messages.

Unwrapped notifications:

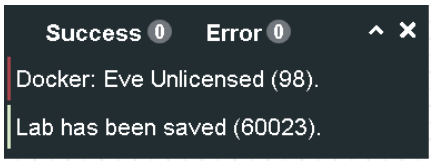

The Notification messages bar appears automatically for any EVE-PRO activity made on Topology.

	Success message counter. For review, click on green ball to unwrap notifications. To wrap notifications, click to the ball again or click at any point of topology
	Error message counter. For review, click on red ball to unwrap notifications. To wrap notifications, click to the ball again or click at any point of topology
	Unwrap or wrap notifications bar.
	Close notifications bar. Note: Notifications bar appears automatically on any EVE topology activity.

© EVE-NG LTD


© EVE-NG LTD

9 Working with EVE labs

⚠ IMPORTANT NOTE: You must prepare and upload at least a couple of images to start building your labs. Refer to section 17


9.1 Creating a lab

Step 1: Click Add new lab. For more information on creating new labs, please refer to section 7.2.2.1



Step 2:



Fill out the lab information. Name and Version are required fields. Next hit Save. Refer to section 7.8.4 for more information about the different fields in the Edit lab window.

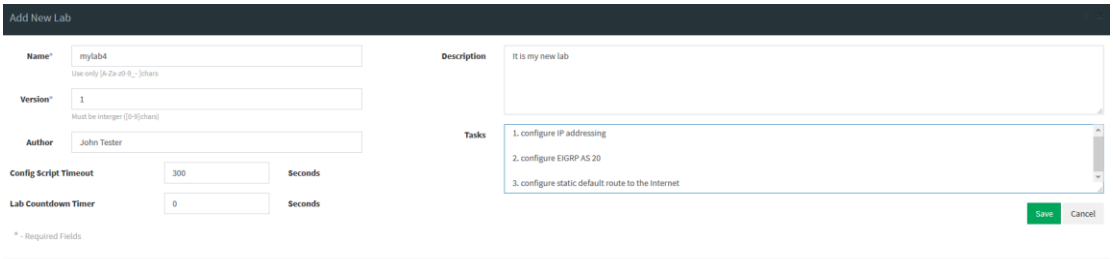

9.1.1 Adding nodes to the lab

The new Topology page will open. There are two different ways to add nodes to the topology canvas:


Step 1: Object/Add Node


Left Side Bar > Add object > node. Refer to section 8.1.1.1 for more information. 	Right click on a free area of the topology page and click on “Node” to add a new node. Refer to section 8.2.1 for more information. 

© EVE-NG LTD

Step 2: The Add new node window will appear. You can scroll down to choose which node you wish to add to the lab topology, or you can type the node name to filter through the node list.


> ⚠ **NOTE:** It will only be possible to select and add nodes that have images preloaded in EVE. These nodes will be displayed in a blue font. To prepare images for EVE, refer to section 0

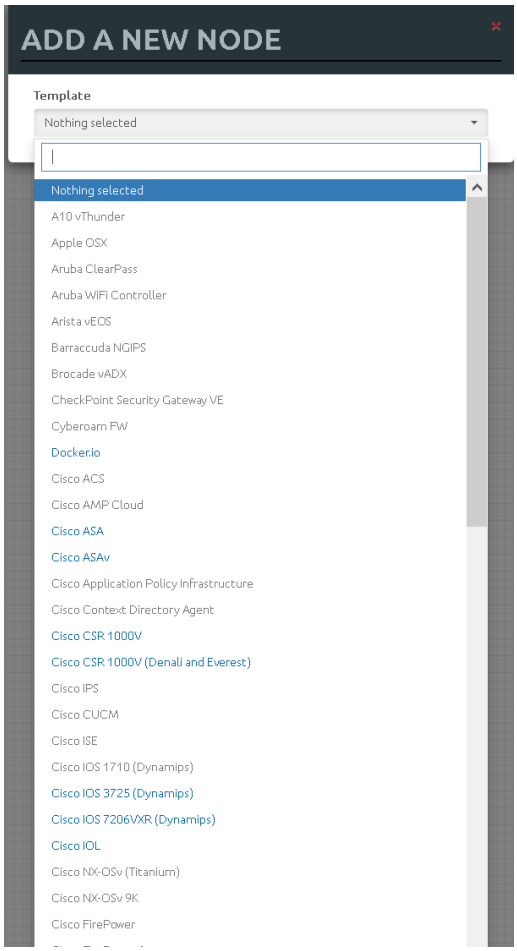

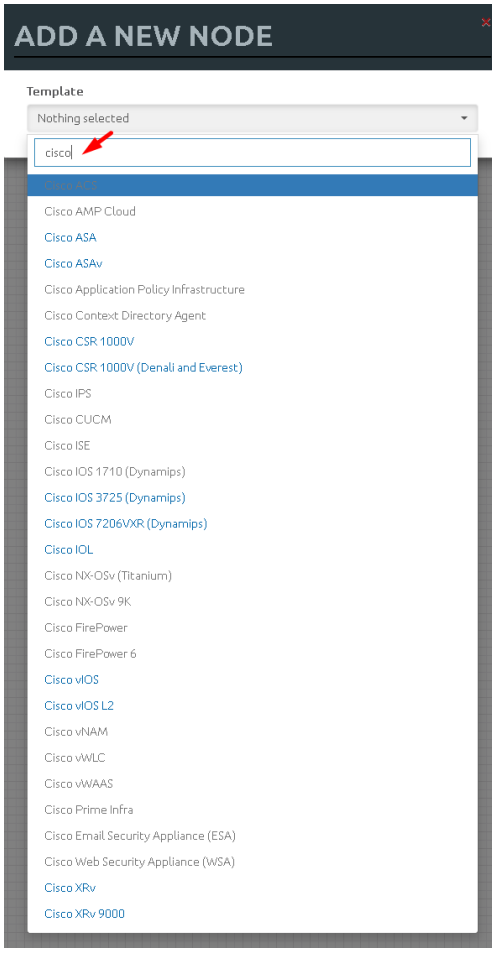


Step 3: Edit “Add a new node” settings. Please refer to the picture and table below.





© EVE-NG LTD

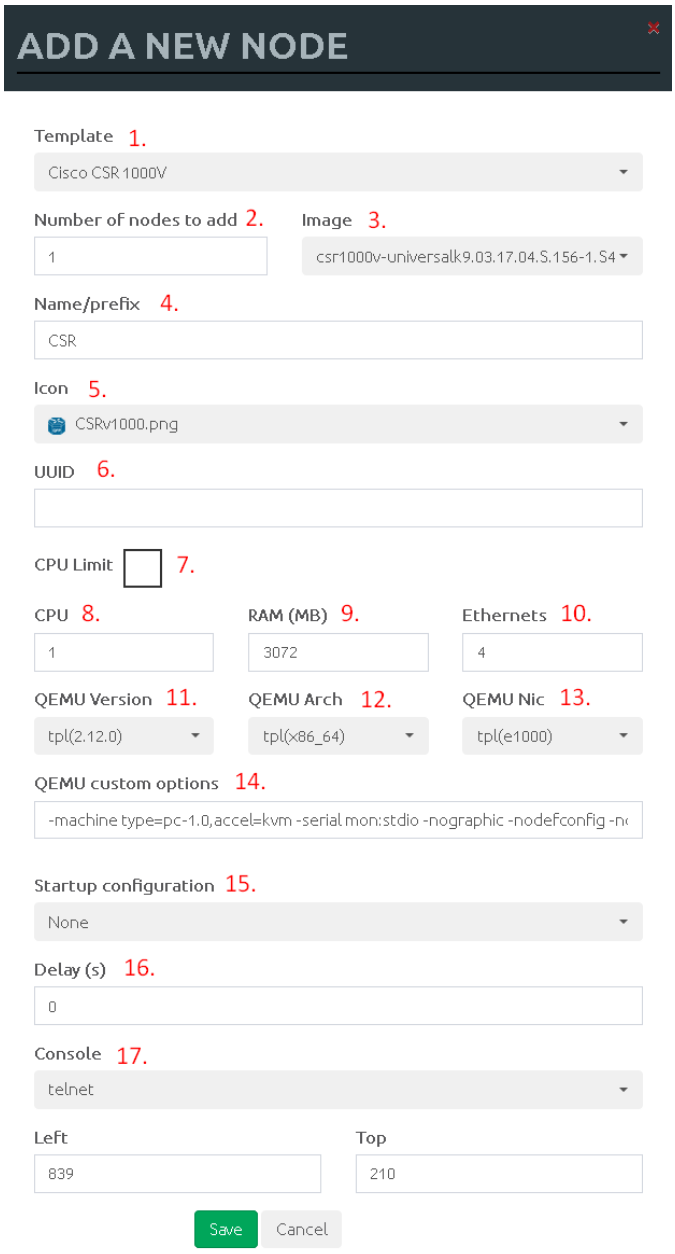




9.1.1.1 Node values Table

Number	Description
1.	 Template menu. Choose which node template to add to the topology


© EVE-NG LTD

2.	 Chose the number of nodes of this type you want to add to the topology
3.	 Choose your preferred version from preloaded images list (if you have more than one image loaded for a single template).
4.	 Type your preferred node name. If you are adding more than one, EVE will automatically append numbers to the nodes name. **Example.** We are adding 5 CSR nodes with the name R. On the topology they will appear as R1, R2, R3, R4, R5. Later using the the Nodes window, you can edit the node names per your needs. Refer to section 8.1.2 or edit the node individually, refer to section 9.1.2.
5.	 Node icons can be changed from the default per your preference, simply choose the preferred icon from the dropdown list. Node icons can be changed later per your needs. Refer to section 8.1.2
6.	The UUID number is assigned automatically after a node is created. You may also set it manually in case you are using a license that is tied to a particular UUID.
7.	 CPU limit per node. This option is already set (checked/unchecked) per EVE recommendations. Refer to section 7.4.3
8.	 Each node template has a pre-set CPU value that aligns with vendor requirements. This value can be changed per your needs.
9.	 Each node template has a pre-set RAM value that aligns with vendor requirements. This value is displayed in MB and may be changed per your needs.
10.	The number of ethernets interfaces.

© EVE-NG LTD

	⚠ **NOTE for IOL nodes:** Ethernet interfaces for IOL nodes are placed into groups of 4. A value of 1 for Ethernet means your node will have 4 interfaces. The serial interface option is available for IOL nodes only and follows the same grouping structure as ethernet interfaces. A value of 1 for Serial means your node will have 4 serial interfaces. 
11.	Custom MAC address for Qemu nodes only. You can define your own MAC address for first interface: 
12.	 EVE will pre-set the best recommended QEMU version for each node template. This value can be changed per your needs.
13.	 Qemu architecture is pre-set per image vendor recommendations. This value can be changed per your needs
14.	 Type of Qemu NIC is pre-set per image vendor recommendations. This value can be changed per your needs.
15.	 Qemu custom options are pre-set per image vendor recommendations. This value can be changed per your needs
16.	 Startup configuration: Value can be changed to set your node to boot from saved configurations. Refer to section 11.3 for more details.
17.	 The Delay value is set in seconds and can be used to delay a node from booting after it is started. Example: if the value is set to 30, the node will wait 30 seconds before processing its boot sequense. This feature is useful in conjunction with the “Start all nodes” function if your lab requires certain nodes to start up before others or to avoid a mass-start of very heavy nodes.

© EVE-NG LTD

18.	 Console types for each template are pre-set with recommended settings. The setting can be changes per your needs. ⚠ **NOTE:** The Docker template contains a wide variety of images, therefore, please refer to section 14.1.3 for recommended console types for each docker image. Windows nodes can use either RDP or VNC but RDP needs to be enabled in Windows itself.
19.	OPTIONAL: Templates for Cisco FirePower, F5, Linux, and Citrix have the option to manually set the MAC address for the first ethernet interface. This will enable the use of licenses that are tied to a particular MAC address. MAC Address format must be like: 00:50:0a:00:0b:00


9.1.2 Edit node

EVE provides two ways to edit nodes after being added to the topology canvas.


⚠ NOTE: A node must be wiped each time an image or startup configuration has been changed.

9.1.2.1 Edit nodes globally

From the Topology page. Click “Nodes” from the left sidebar to bring up the nodes list. Refer to section 8.1.2 for more details.




9.1.2.2 Edit node individually.




Right click on the node and click Edit

The “Edit node” window will appear. It is very similar to the window that is displayed when you add a new node. To change values for the node, refer to the nodes value table in section 9.1.1.1.

© EVE-NG LTD

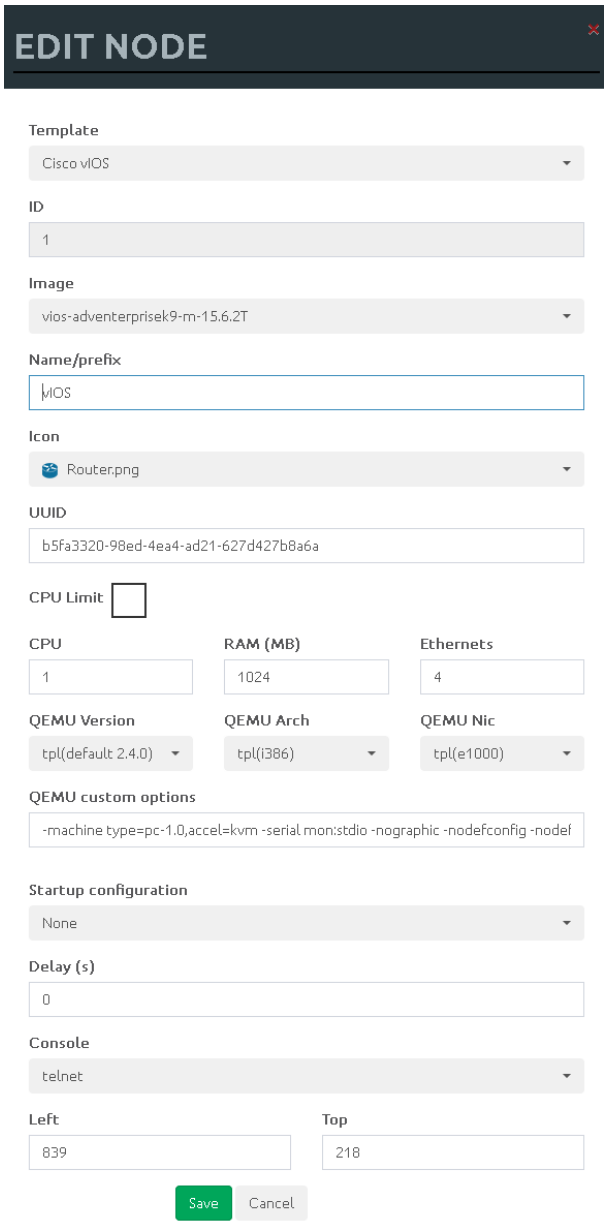

9.1.3 Wipe Node



The “Wipe node” function will clear the NVRAM of the node. Each time a node setting is changed (CPU, RAM, boot image or startup configuration) a wipe must be issued on that node. For more information refer to section 11.3

9.1.4 Interconnecting nodes


To connect nodes on the lab, use the drag and drop style method

© EVE-NG LTD





Connector symbol: Moving the mouse over a node will make an orange male plug appear. The male plug is used to connect nodes on the topology, drag and drop style. Release the mouse pointer on the second node.



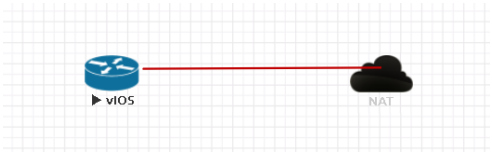


The connection window will appear. Choose the interface you want to use to interconnect the nodes. Click Save when finished.

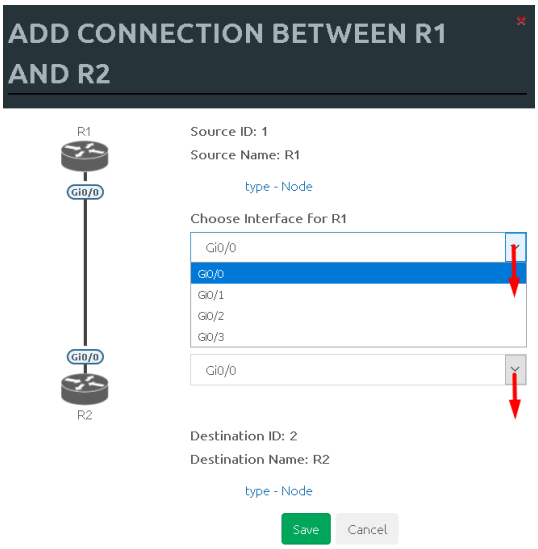


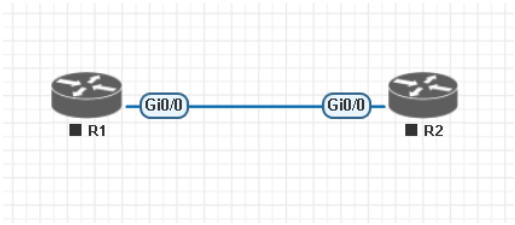

9.1.5 Edit connection link style

Right click on the connection link and choose Edit Style



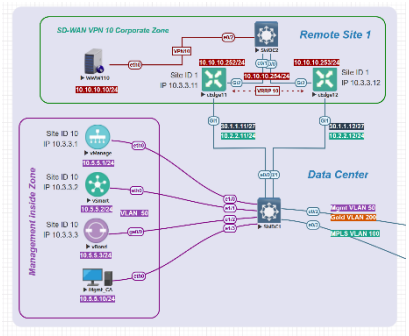


Straight link style



Bezier link style



Flowchart link style



Style: Allows you to choose solid or dashed style for link. This can be edited later in the “Shape Edit” menu.

Link colour: Allows you to choose a colour for the link. This can be edited later in the “Shape Edit” menu.

Pos “interface” label: Allows move and position interface label

Link Style: Allows you to choose a style Straight, Bezier, Flowchart or StateMachine for the link. This can be edited later in the “Shape Edit” menu.

Link label: Allows you to add a label on the link. This can be edited later in the “Shape Edit” menu.

Pos Label: Allows move and position Link label, position it on the link

Curviness: Link curviness feature for Bezier style link

Midpoint: Link mid point change, Flowchart style only


Round: Link round angles, Flowchart style only

Stub: Stub link connection beside node, Straight style only


For edit Link style use mouse right click on link to call out link style editor.

9.1.6 Edit connection link quality

Right click on the connection link and choose Edit Quality. This function will allow apply on live connection Delay in ms, Jitter in ms, Packet loss in % and rate in kbs.

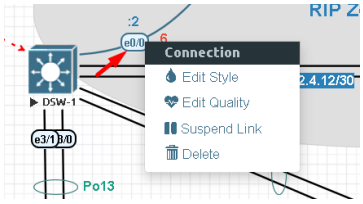

It is recommended to apply value divided by 2 on both link interfaces to achieve precise connection quality. In the example below is applied 25% and 25% packet loss, which gives result of 50% packet loss in connection between nodes.





9.1.7 Suspend or resume link connection

The EVE-Pro has integrated feature to detect connection state on the interface.


Right click on the connection link and choose Suspend Link. This function will suspend connection between the two nodes. Literally, it will act like disconnected cable from the node, and interface will detect it as no connection. Suspended link will be marked with red dots.


To resume link connection, right click on the link connection and choose Resume Link







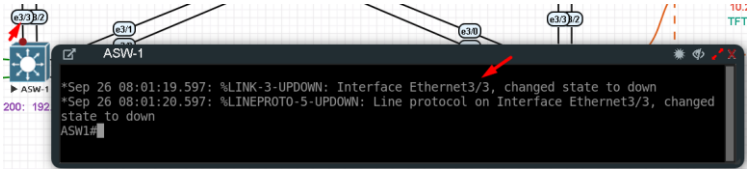

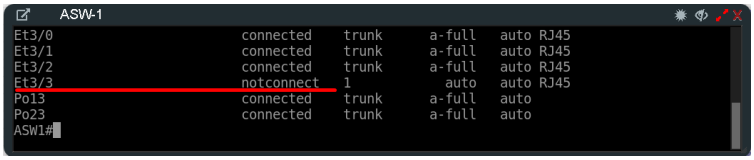

Supported nodes with suspend/resume feature:


Supported nodes for Link Suspend/resume	Not supported
IOL vIOS XRv9K CSR CSR SD-WAN ASAv Firepower FTD Juniper vSRX 12.1X47 Juniper vSRX NG Juniper vMX VCP/VFP Juniper VRR Nokia Timos SR 19.5.1 Windows All Linux All Apple OSX Mikrotik Palo Alto F5 Fortigate Checkpoint Cumulus Cyberoam FW Sophos FW SonicWall FW Viptela Velocloud Versa Networks sd-wan pfSense Brocade vADX Barracuda NGFW HP VSR1000	Arista NXOS 9k ASA ported XRv Old Juniper vMX Juniper vQFX Dynamips Titanium Nexus 7.x

⚠ **NOTE**: Avoid use Link suspend feature if you have configured:
IOL L3 router image with:
If the IOL L3 node interface is configured as DHCP client (ip dhcp), IOL node is attempting to bring up interface in up/up state. If you have enabled Link suspend feature on such configured interface, the node will flap link connection up/down/up.
Same behave is observed if your Serial interface is configured with PPP encapsulation.

Other observations:

vIOS L2 image has minor internal issue. LACP protocol does not detect interface state as down/down


9.1.8 Delete connection between nodes



To delete a connection, right click on it and hit “Delete.”

© EVE-NG LTD

9.1.9 Delete Node



To delete a node, right click it and hit “Delete.” This is a non-reversable function

NOTE: It is strongly recommended to delete connections from a node before deleting the node itself.

9.2 Running labs

9.2.1 Starting lab

Nodes inside a lab may be started individually, in groups, or all at once.





The Start all nodes option will start all nodes on your topology.

⚠ IMPORTANT. Starting all the nodes at once can result in major spikes in CPU utilization. Please make sure you are not using the “Start all nodes” option for heavy labs. Instead, it is recommended to start nodes in small groups.


Starting a node or group of nodes:

Right click on single node or node group and hit “Start.”



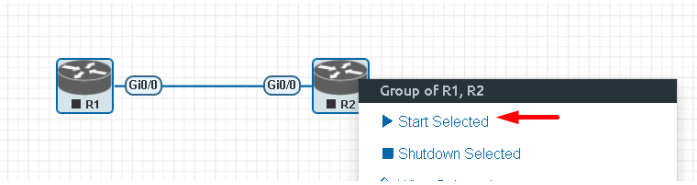

Running nodes will turn blue. Refer to section 8.3 for node states

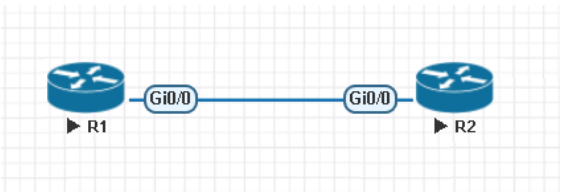


© EVE-NG LTD


9.2.2 Interconnecting running nodes (hotlinks)

Eve Professional offers the hotlinks feature which allows you to interconnect node in the running state.



Connector symbol. Moving the mouse over a node will make an orange male plug appear. The male plug is used to connect nodes on the topology, drag and drop style. Release the mouse pointer on the second node

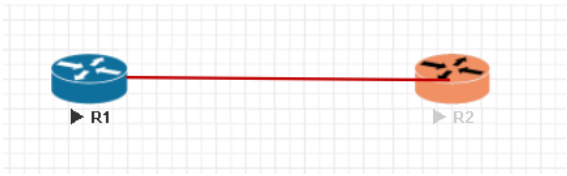

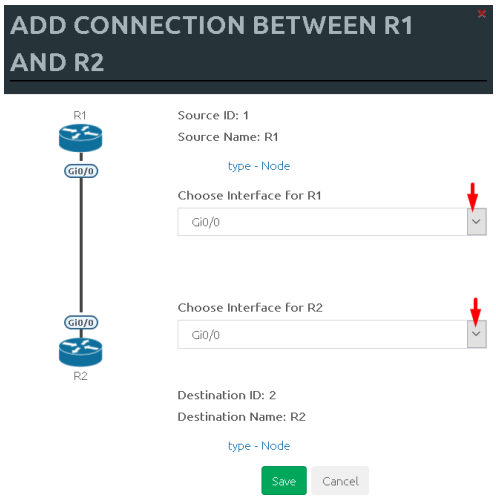

9.2.3 Link quality delay, packet loss, jitter and rate feature

Please refer to Section 9.1.6

9.3 Saving labs

To save a running lab, refer to the vendor recommended save commands for each node.

Example:
Cisco: “copy run start”
Juniper “commit”

Your current work will be saved in the nodes’ NVRAM and the lab can be stopped safely. Starting the lab again will allow you to pick up from where you left off.

> ⚠ **WARNING:** Using the wipe action on a node will clear its NVRAM. This is similar to doing a factory reset on a device.

The configurations of nodes can be exported and used as initial or startup configurations for your labs. To export configurations and configuration sets for labs refer to section **11.1**

9.4 Stopping labs



The Stop all nodes option will stop all nodes on your topology.

NOTE: It is recommended to save your running configurations before you stop your nodes.

Stopping a node or group of nodes:


Right click on single node or node group and hit “Stop.”

For individual node Stop options refer to section 8.2.5

© EVE-NG LTD

9.5 Start saved lab

Select the lab you want to start and click “Open”. To start Lab refer section 9.2.1

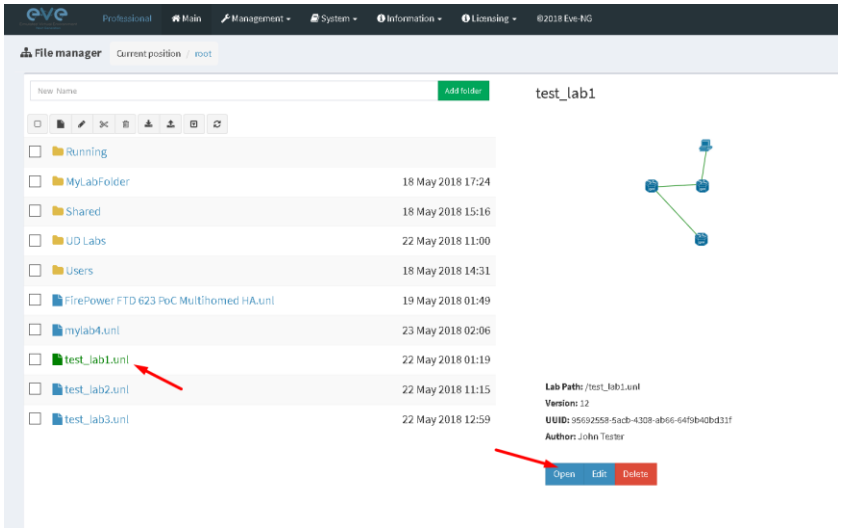

9.6 Working with multiple running labs

Refer to section 7.2.1.1

9.7 Importing labs

Refer to section 7.2.2.6

9.8 Exporting labs

Refer to section 7.2.2.5

9.9 Deleting labs

Refer to section 7.2.2.2

9.10 Moving labs

Refer to section 7.2.2.4

9.11 Shared Lab

EVE-NG provide an option to share single running lab between users. It is designed to run single lab for many users who can participate in lab session and configure it.

Note: Lab sharing option can be used between any of EVE NG User roles.


- ✓ Administrator can share lab for other Administrators, Lab Editors or Lab Users.
- ✓ Lab Editor can share lab for Administrators, other Lab Editors or Lab Users

© EVE-NG LTD


✓ Lab User can share lab for Administrators, Lab Editors or other Lab Users.

9.11.1 Create Lab share

Step 1. Navigate to EVE main Lab tree and select which lab you want to share with others

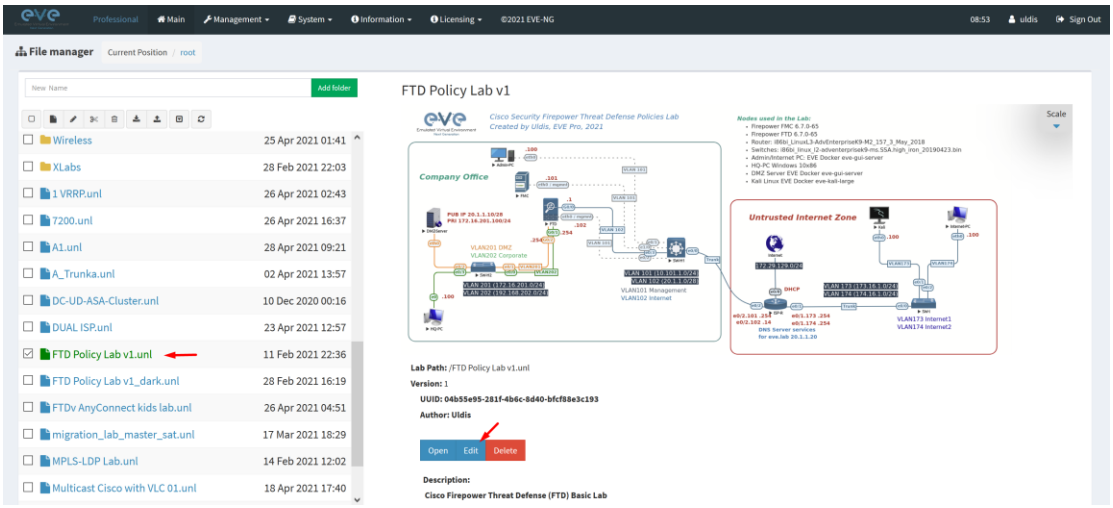

Step 2: From menu “Shared with” select Users to whom you want to share lab

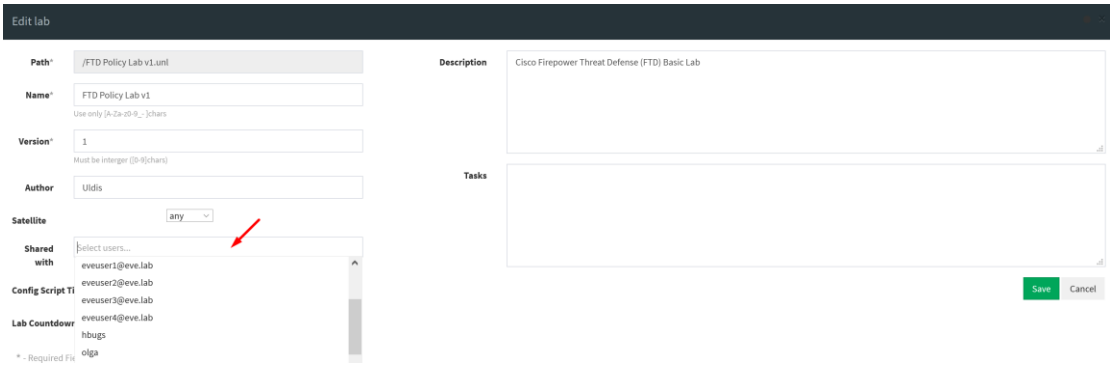


9.11.2 Remove Lab share

Note: Only owner of lab share can remove sharing.

Step 1. Navigate to EVE main Lab tree and select shared and click “Edit”

Step 2: Remove users from Shared with

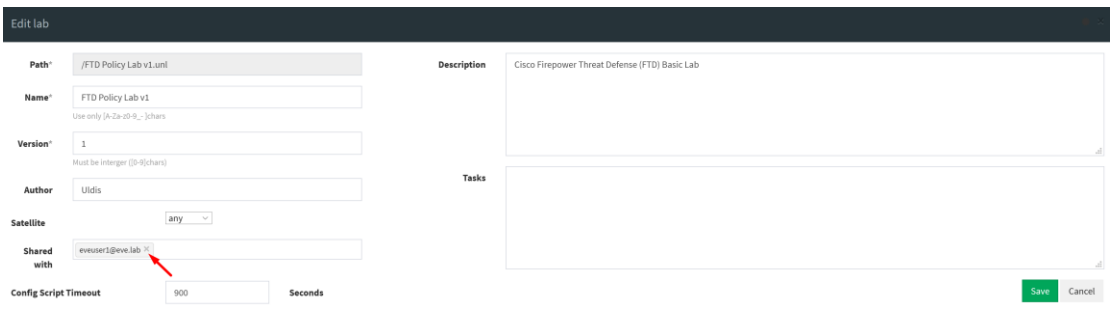


© EVE-NG LTD

9.11.3 Working with shared lab

Step 1: Owner of shared lab starts the lab.

Step 2: Other user to whom this lab is shared, log into EVE with his account


Step 3: Open Shared Lab folder, the lab shared to him will appear as shared lab with owner user in brackets.

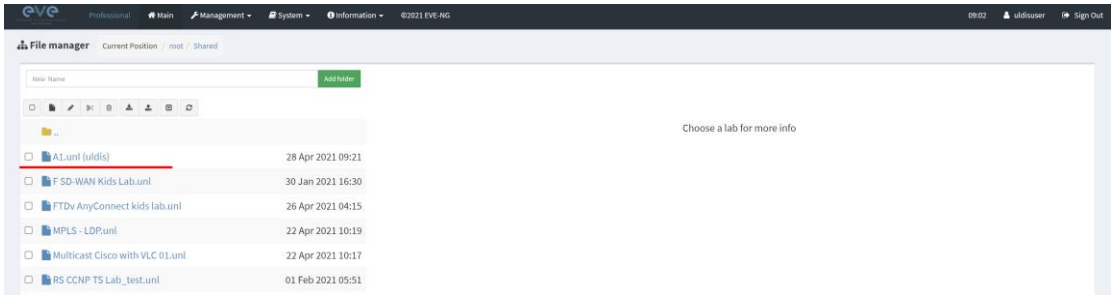

Accordingly, permissions of user roles:

- ✓ Administrator can start, stop or edit lab.
- ✓ Lab Editor can start, stop or edit lab.
- ✓ Lab user can start and stop lab

When you join in the shared lab, on the top of left side bar menu, you will notice the name of lab owner.

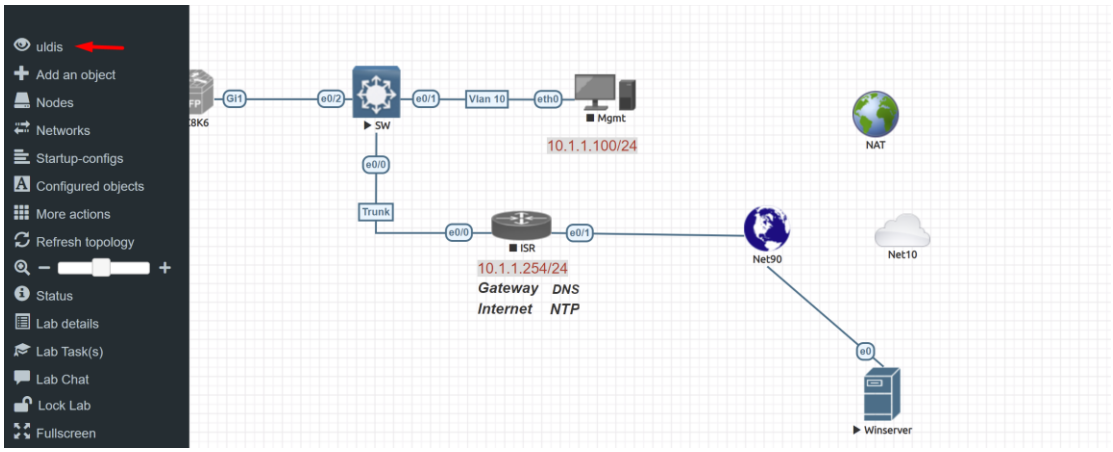

Note: If the Lab is been edited by Administrator, changed links connections or nodes, other shared lab users must refresh this lab topology to obtain changes.

Note: Parallel Consoles

Telnet Consoles: can be opened parallelly for any user

VNC Console: can be opened parallelly for any user


RDP Console: Only one user at same time can use RDP console to the node

© EVE-NG LTD

9.12 Sticky lab

Pre-requisites for this feature: For Lab selection from the list, the Lab must be upload in the Shared folder by admin first. If Lab Menu is selected to “None”, User can close the Lab and open another shared Lab for him.

Applies for User role only. Set the specific Lab for the user “sticky lab”. After login in the EVE User will directed only to this lab. He cannot close the lab to get in main management page. User can Start/Stop/Wipe lab, as well save his lab work on the lab devices. Follow Section: 7.3.1.5

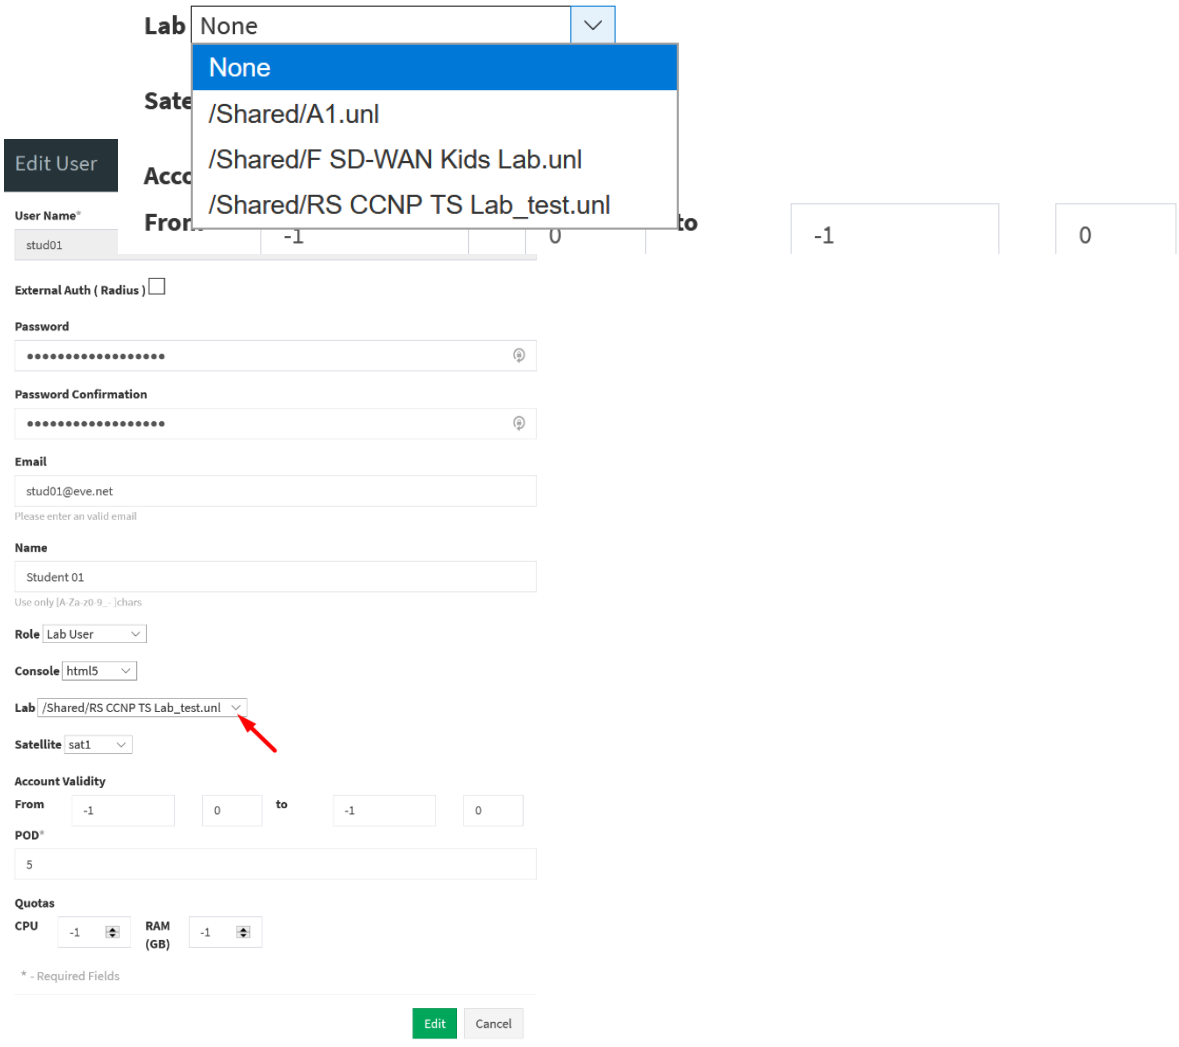


10 EVE Clouds and Networks

10.1 Bridge Network


The EVE Bridge interface acts like an unmanaged Switch. It supports passing along tagged dot1q packets.

Example: We have to connect many nodes in a flat (dot1q) network


Step 1: Add a Bridge Network onto the topology. There are two ways to do this: Right-clicking on the topology area and selecting “Add Network” or in the sidebar click “Add an Object” and then select “Network.” Please refer to sections 8.2.3 and 8.1.1.2

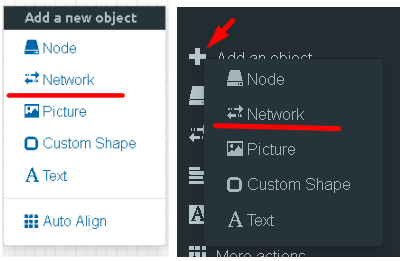

Step 2: Name/prefix can be changed in order to rename your Bridge network. Make sure your network type is set to bridge.

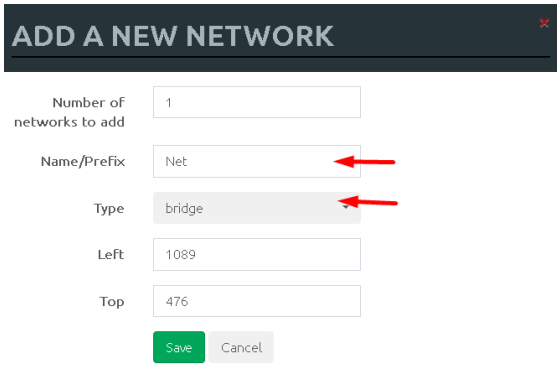

Step 3: Connect your nodes using the drag and drop connector. Refer to sections 9.1.4 and 8.2.3




© EVE-NG LTD

10.2 Internal Network


Internal cloud network is used as an extended connector between nodes inside of one lab. It is isolated cloud which not visible for other labs or users.

EVE Pro is offering 3 independent Internal clouds/domains. It is isolated from each other. Inside of single lab you can have up to 3 isolated cloud/domain networks. Example of Internal cloud usage below:

Step 1: Add two internal cloud networks onto the topology.

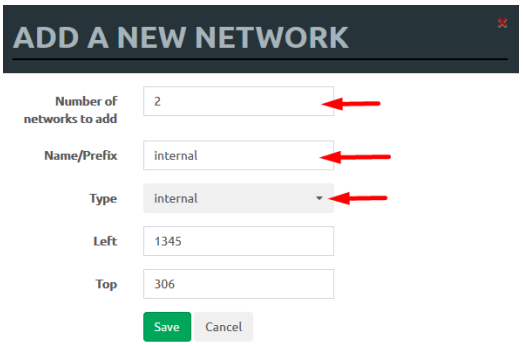


Step 2: Connect your lab nodes to internal cloud. Your configured nodes will work like being connected to the same switch (or the same bridge in EVE). CDP works. It is convenient if it is necessary to have connections across the lab and you don't want to have connections going from one end of the lab to the other.

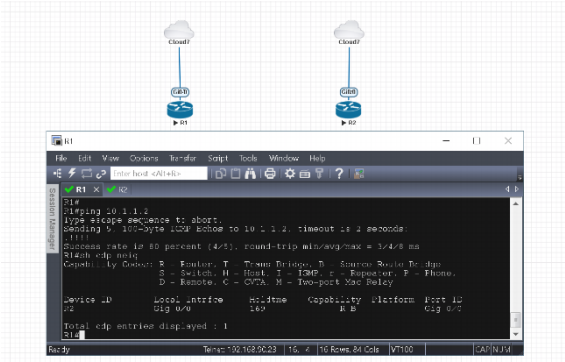

10.3 Private Network

Private cloud network is used as an extended connector between labs in the one user POD. Private cloud is isolated and not visible for other users.

EVE Pro is offering 3 independent Private clouds/domains. It is isolated from each other. Inside of single user POD you can have up to 3 isolated Private cloud/domain networks. Example of Private cloud usage below:

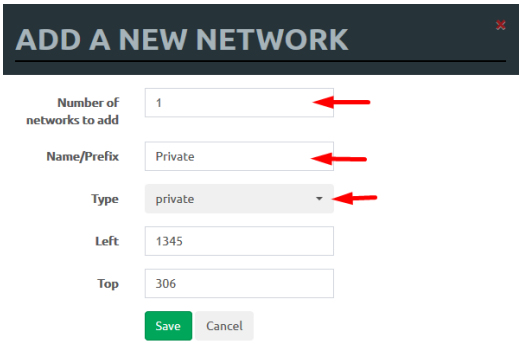

Example: Single user is running multi labs (Lab1 and Lab2), and want interconnect it.


Step 1: Add private cloud network onto the topology Lab1.

Step 2: Add private cloud network onto the topology Lab2.

© EVE-NG LTD

Step 3: Connect your lab node to Private cloud. Your connected nodes in Lab1 and Lab2 will work like being connected to the same network. CDP works. It is convenient if it is necessary to have connections across the multi labs.


⚠ **NOTE:** Using Private cloud, avoid to connect nodes with same ID to it. It will raise MAC address collision in your connection. Pic below shows correctly interconnected Node ID1 in Lab1 and Node ID5 in Lab2.

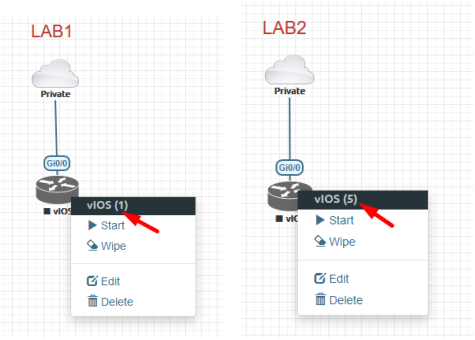

10.4 NAT Network

EVE-NG PRO has an embedded NAT interface with the subnet 172.29.129.0/24. This feature is similar to the VMWare NAT interface, but EVE is translating the 172.29.129.0/24 (this subnet is hardcoded in EVE and is not configurable) subnet to EVE's management interface pnet0.

To add a NAT Cloud onto the EVE topology:

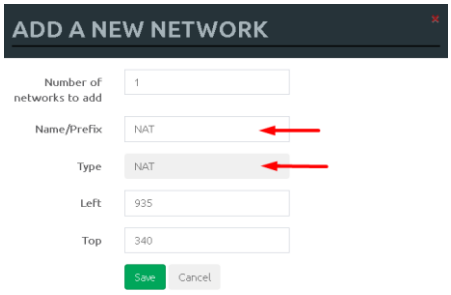


Step 1: Add A New Network onto the topology. There are two ways to do this: Right-clicking on topology area and selecting "Network" or in the sidebar, "Add an Object" and then select "Network."

Step 2: Name/prefix can be changed in order to rename your NAT network. Make sure your network type is set to NAT.

Step 3: Connect your nodes using the drag and drop connector. Refer to sections 9.1.4 and 8.2.3

© EVE-NG LTD

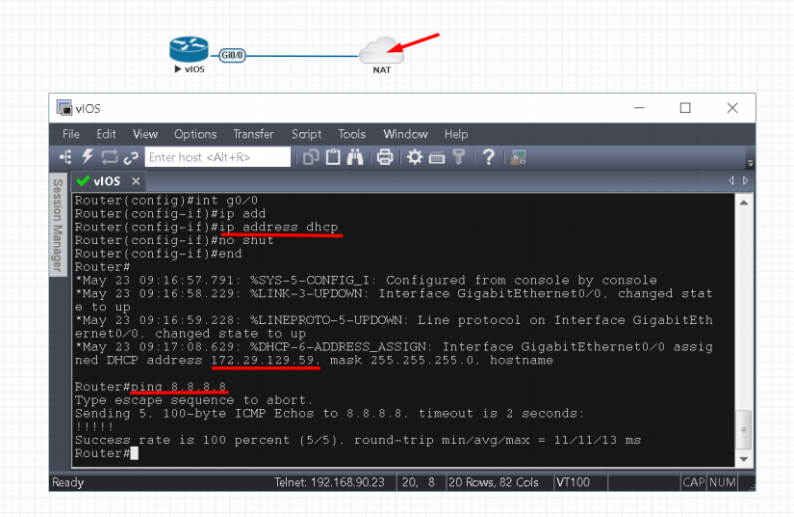

If your EVE management is connected to the Internet, adding a NAT cloud onto the EVE lab enables you to have internet access from within your EVE lab using NAT.

EVE NAT Gateway IP is: 172.29.129.254/24

DHCP is enabled on the EVE NAT Cloud.

10.5 Management Cloud0 interface


EVE management interface is also known as the Cloud0 network for labs. The Cloud0 interface is bridged with your EVEs first NIC. “Cloud” is used as an alias to pnet. Pnet is the bridge interface name inside of EVE.

```
# The primary network interface
iface eth0 inet manual
auto pnet0
iface pnet0 inet dhcp
    bridge_ports eth0
    bridge_stp off
```


Cloud0 is commonly used inside EVE labs to get management access to nodes running inside EVE from a host machine external to EVE.

> ⚠ **IMPORTANT NOTE:** For EVE VMs running on ESXi, make sure your management interface bridged with the vSwitch (Port group) has the security settings for Promiscuous Mode set to Accept. Any port group or vSwitch used to connect an external network to an EVE Cloud network needs to have the Promiscuous mode set to “Accept”!

vSwitch Settings

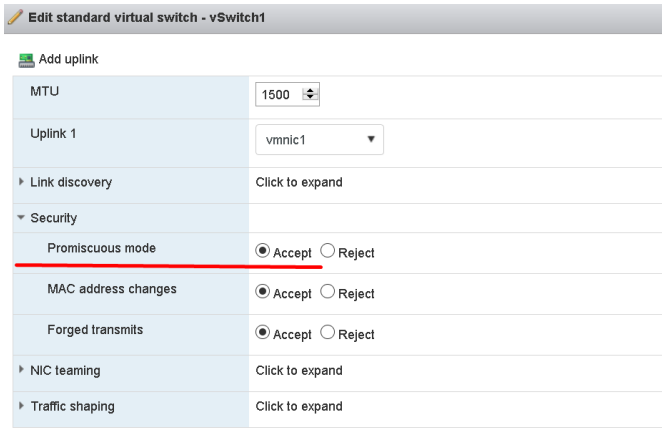

Portgroup Settings

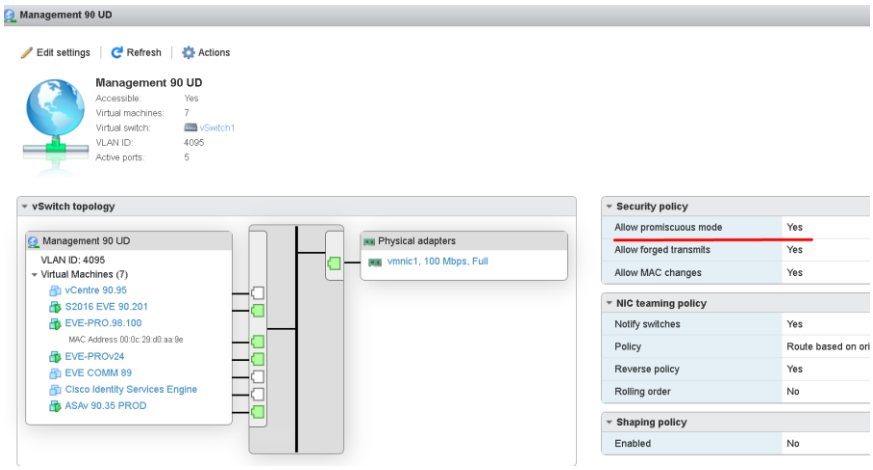

EVE Cloud0 bridging table.

Lab name	EVE interface name (inside)	Type	Notes
Cloud0	pnet0	Bridged	Cloud0/pnet0 is bridged with your primary EVE ethernet port. It is assigned a management IP address used for WEB GUI access. The EVE management subnet can be used as a management network in labs.

⚠ **Question:** How can I obtain my Cloud0 subnet and gateway IP. Many EVE VMs only have a DHCP address assigned on the pnet0 interface.


Answer: SSH to EVE and type the following from the CLI:

```
route
```

```
root@eve-ng:~# route
Kernel IP routing table
Destination     Gateway         Genmask         Flags Metric Ref    Use Iface
default         192.168.90.1    0.0.0.0         UG    0      0        0 pnet0
172.17.0.0      *               255.255.0.0     U     0      0        0 docker0
172.29.129.0    *               255.255.255.0   U     0      0        0 nat0
192.168.90.0    *               255.255.255.0   U     0      0        0 pnet0
root@eve-ng:~#
```

Example: We want to use Cloud0 as a management network for an ASAv node in an EVE lab. From the above-obtained information, we know that our Cloud management subnet is 192.168.90.0 with a mask of 255.255.255.0 and the Gateway IP is 192.168.90.1.

© EVE-NG LTD

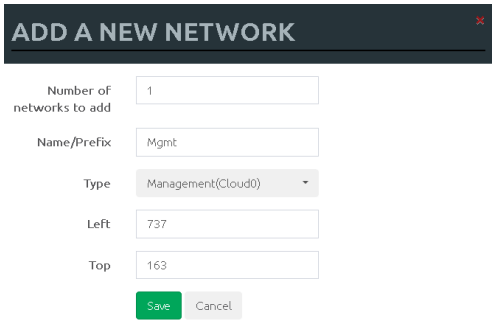


Step 1: Add A New Network onto the topology. There are two ways to do this: Right-clicking on topology area and selecting “Network” or in the sidebar, “Add an Object” and then select “Network.”


Step 2: Name/prefix can be changed in order to rename your Cloud0 network. Make sure your network type is set to Management(Cloud0).

Step 3: Connect your ASAv using the drag and drop connector to the Cloud0 network. Refer to sections 9.1.4 and 8.2.3

Step 4: Start the node and configure the interface connected to Cloud0 with an IP address from the management subnet (192.168.90.0/24 in this example). Make sure you do not assign duplicate IPs.

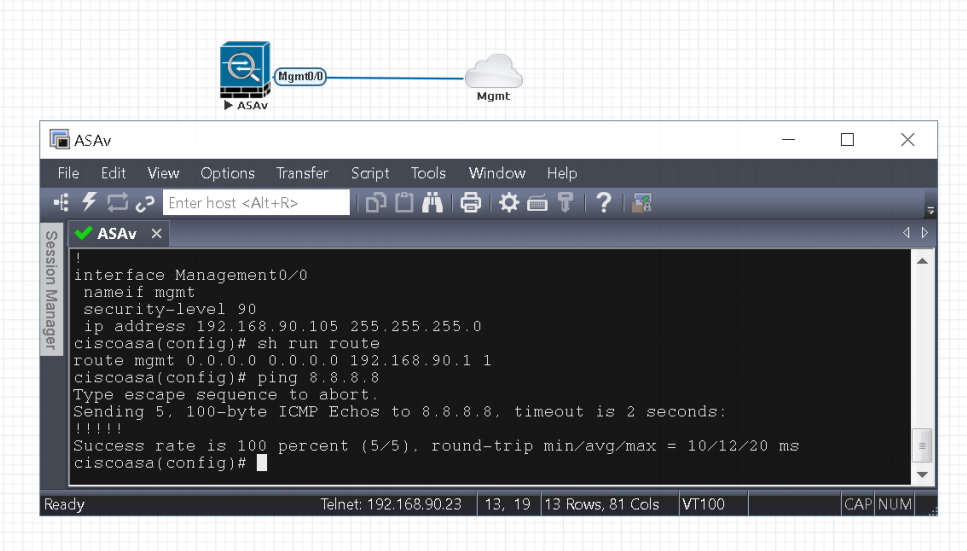


The native management host (home PC) can be used to manage nodes in the EVE lab over https. Example below showing http connection to Fortigate FW node in the EVE lab from native PC using Chrome browser.

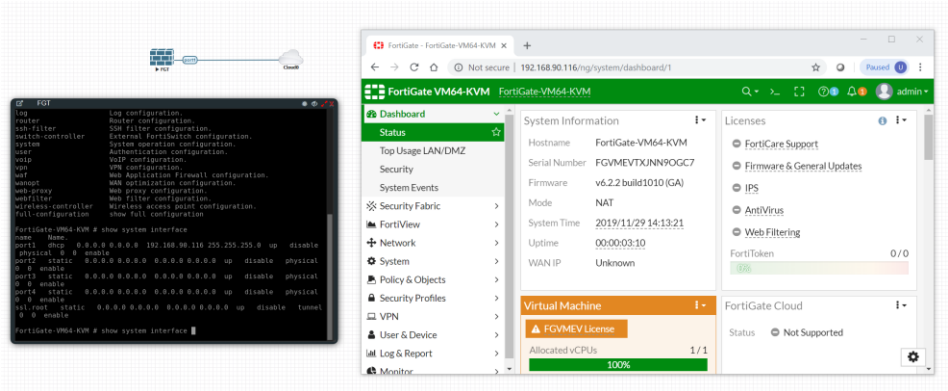

NOTE: Cloud interfaces can be used to connect multiple nodes to a single cloud instance on the topology.


© EVE-NG LTD

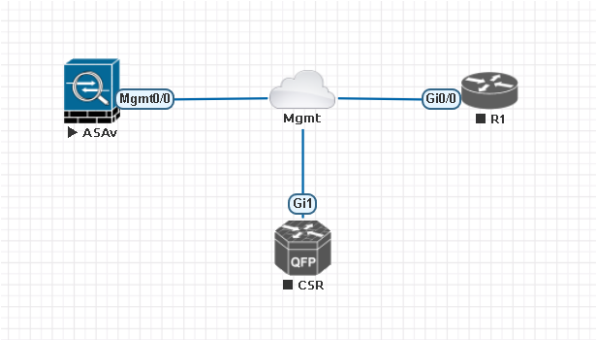

10.6 Remove cloud interfaces

For security reasons you can make cloud (Cloud0-9) interfaces invisible for the Lab Editors and Lab Users.

```
echo -n 1 > /opt/unetlab/natonly
```

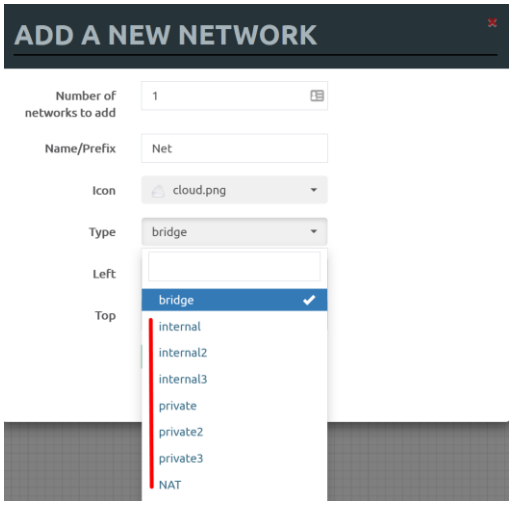

To set back Clouds0-9 visible:

```
echo -n 0 > /opt/unetlab/natonly
```

All Clouds 0-9 will remain visible for Admin users.

10.7 Other cloud interfaces

Other cloud interfaces can be used to extend a lab connection inside of EVE or bridged with other EVE interfaces to connect external networks or devices.

EVE Cloud bridging table.

Lab cloud name	EVE interface name (inside)	Type	ESXi VM corresponding interface	VMware Workstation corresponding interface	Bare HW Server	Notes

© EVE-NG LTD

Cloud0	Pnet0	bridged	Network adapter 1	Network Adapter	First ethernet Eth0	Cloud0/pnet0 is bridged with your primary EVE ethernet port. It is assigned a management IP address used for WEB GUI access. The EVE management subnet can be used as management network in the labs.
Cloud1	Pnet1	bridged	Network adapter 2	Network Adapter 2	Second ethernet Eth1	Cloud1 can be bridged with your EVE second ethernet port to achieve connection to another network or device. The IP address is not required to be configured on it. It will act like a pure bridge your external connection with EVE lab node.
Cloud2	Pnet2	bridged	Network adapter 3	Network Adapter 3	Third ethernet Eth2	Same as Cloud1
Cloud3	Pnet3	bridged	Network adapter 4	Network Adapter 4	Fourth ethernet Eth3	Same as Cloud1
Cloud4-9	Pnet4-9	bridged	Network adapter 5-10	Network Adapter 5-10		Same as Cloud1

If some of the clouds (e.g. Cloud1) are bridged to another ethernet (VMnet) you can connect your EVE lab to an external VM or physical device (like e.g. a switch, IP phone or access point).

⚠ For ESXi make sure that you have set Promiscuous mode security settings on the vSwitch and Port group to Accept. Please refer to section 10.5

The next sections will explain how you can use Cloud networks in EVE to connect to other external (e.g. VMWare) VMs or physical devices.

10.8 Connecting external VM machines to the EVE Lab

10.8.1 ESXi VM machines

External ESXi VM machines can be connected to EVE labs using cloud interfaces.

⚠ **NOTE**: A single Cloud interface can be used to connect more than one external VM to the EVE lab.


Example: Connecting a Web Security Appliance (WSA) to the lab using the Cloud1 interface.

© EVE-NG LTD


Step 1: Create a new or use an existing portgroup on your ESXi and assign it to EVE and WSA VMs as shown below. Make sure you have set Promiscuous mode on the vSwitch (portgroup WSA-MGMT) to Accept.

⚠ NOTE: VM machines must be in a powered off state to assign network interfaces.

Portgroup WSA-MGMT (with vSwitch5 as parent) settings:

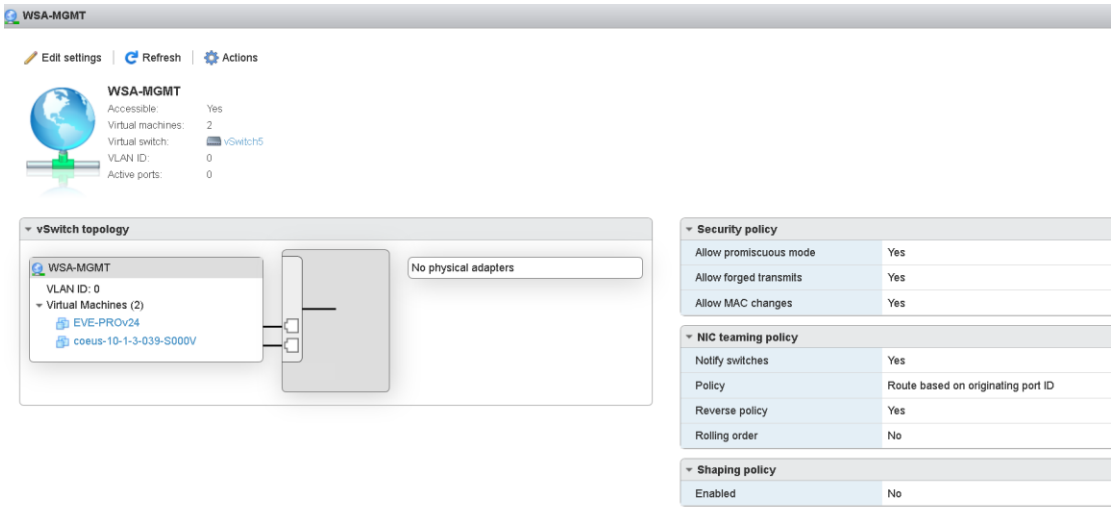


Parent vSwitch5 settings:

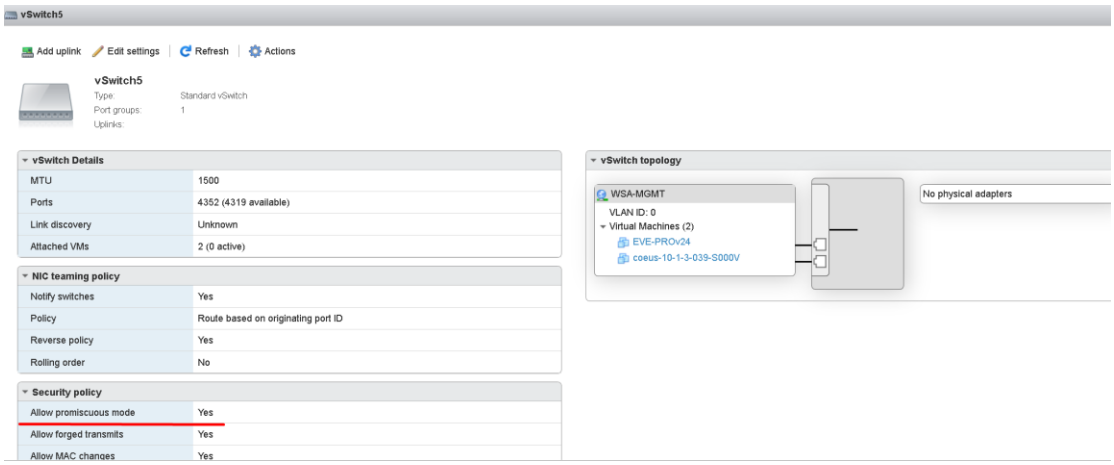

EVE and WSA VMs settings

EVE VM, second port is assigned to portgroup WSA-MGMT. It is Cloud1 on the EVE topology.	Cisco Web security appliance (WSA), Management port is assigned in portgroup WSA-MGMT.


© EVE-NG LTD

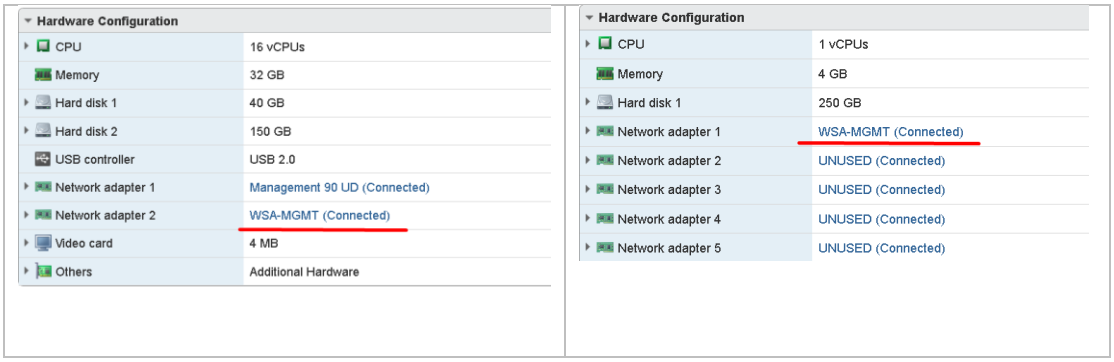

EVE Lab connected to the WSA (Cloud1)

⚠ NOTE: ESXi WSA VM obtained the IP 192.168.10.3 from the DHCP pool on the lab switch. The gateway is 192.168.10.1

⚠ NOTE: The Firefox Docker node user for management obtained the IP 192.168.10.2 from the DHCP pool configured on the lab switch.

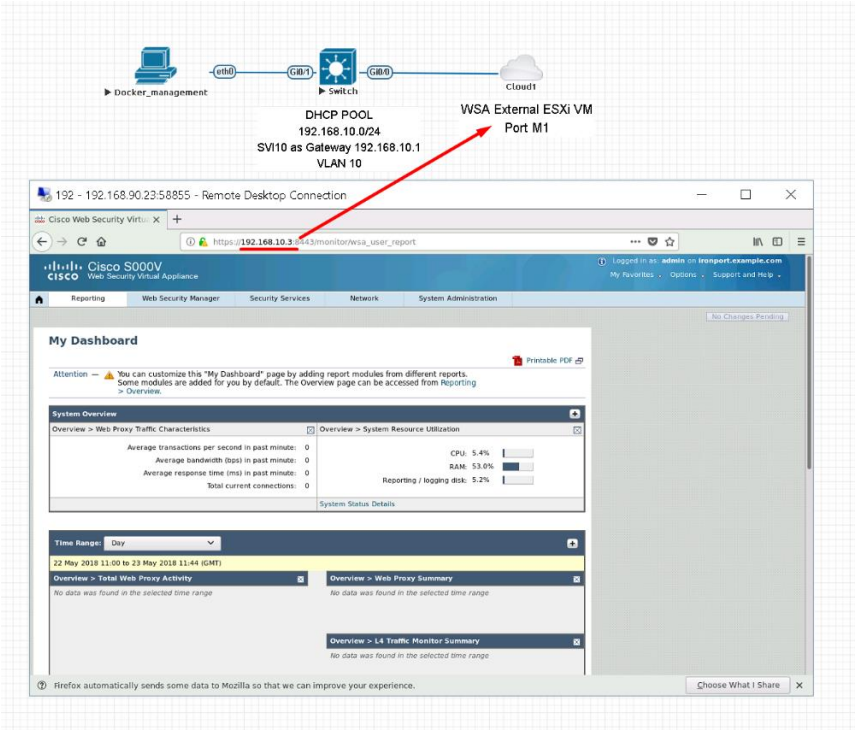

10.8.2 VMWare workstation machines

External (meaning not running inside EVE) VMWare workstation machines can be connected to EVE labs using cloud interfaces.

⚠ **NOTE**: A single Cloud interface can be used to connect more than one external VM to the EVE lab.


Example: Connecting Web security Appliance (WSA) to the lab using **Cloud2** interface.

⚠ **NOTE:** VMs must be in a powered off state to assign network interfaces.

© EVE-NG LTD


Step 1: Open your VMWare Workstation Virtual Network Editor and configure the VMnet interface for the Cloud and WSA VMs. If necessary add a new VMnet. The example below is showing VMnet2 Settings in VMWare workstation. DHCP must be disabled for VMnet2.

Virtual Network Editor settings:

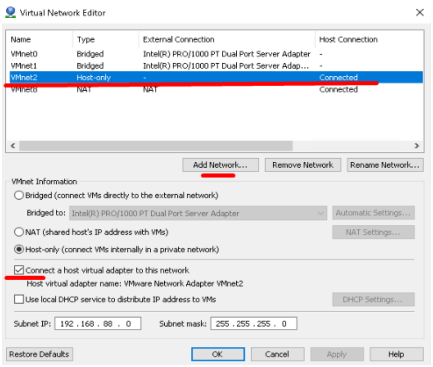


EVE and WSA VMs settings

EVE VM, the third port (Network adapter 3) is assigned to VMnet2. This is Cloud2 inside your EVE labs.

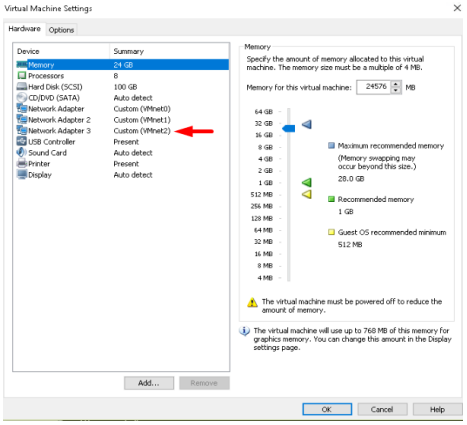

Cisco Web Security Appliance (WSA), Management port is assigned to VMnet2

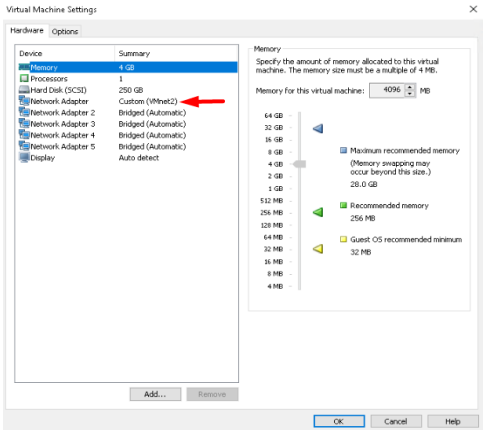


EVE Lab connected to the WSA (Cloud2)

⚠ NOTE: ESXi WSA VM obtained the IP 192.168.10.3 from the DHCP pool on the lab switch. The gateway is 192.168.10.1

⚠ NOTE: The Firefox Docker node user for management obtained the IP 192.168.10.2 from the DHCP pool configured on the lab switch.

© EVE-NG LTD

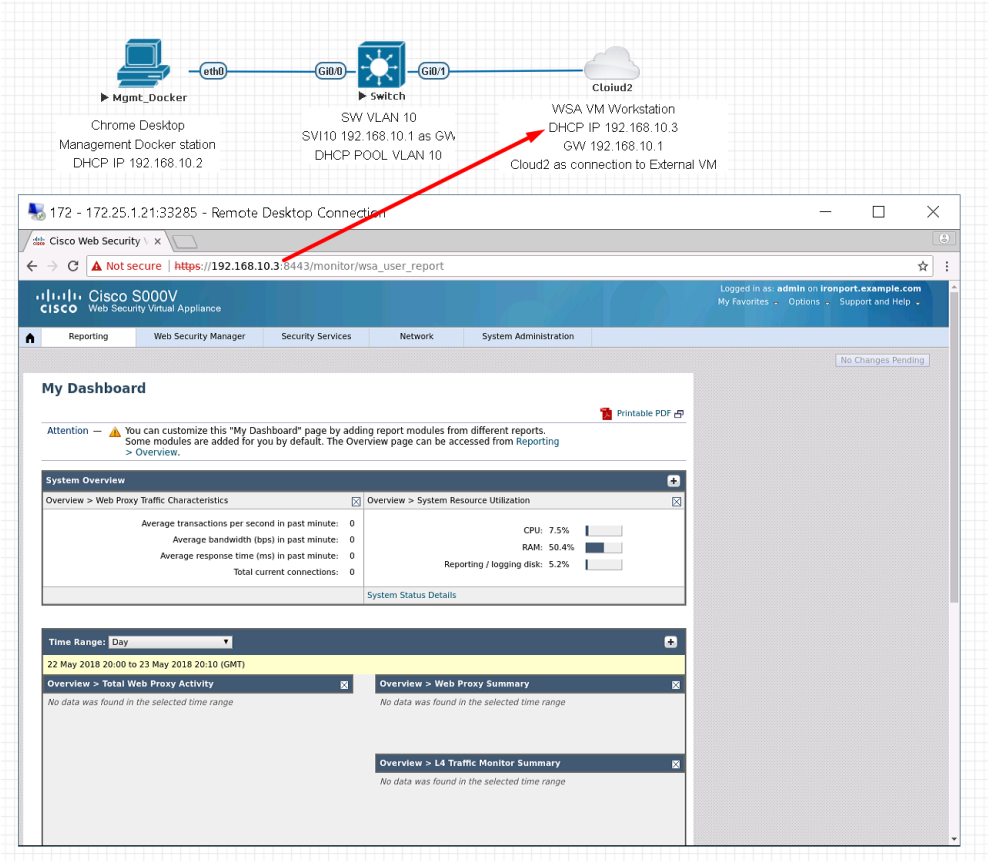

10.9 Connecting EVE Lab to a physical device

10.9.1 ESXi EVE

To connect a physical device (e.g. router, switch) to an EVE lab over a cloud interface, we have to bridge the ESXi NICs ethernet port to a VMnet interface.

⚠ **IMPORTANT NOTE:** Make sure that you have set Promiscuous mode security settings on the vSwitch and Port group to Accept.

⚠ **IMPORTANT NOTE:** If you are building trunk between EVE lab node to real Switch, please make sure you have set your ESXi vSwitch interface to accept all vlans. Reference: https://kb.vmware.com/s/article/1004074


The Example below is showing ESXi Server settings of the virtual network bridged to the physical interface.

Logical chain of the networking bridge:


EVE Lab Cloud0 →Portgroup “Management 90 UD”→vSwitch 1→Physical Adapter eth1

© EVE-NG LTD

vSwitch1 settings bridged with Server Ethernet port vmnic1 (physical adapter)

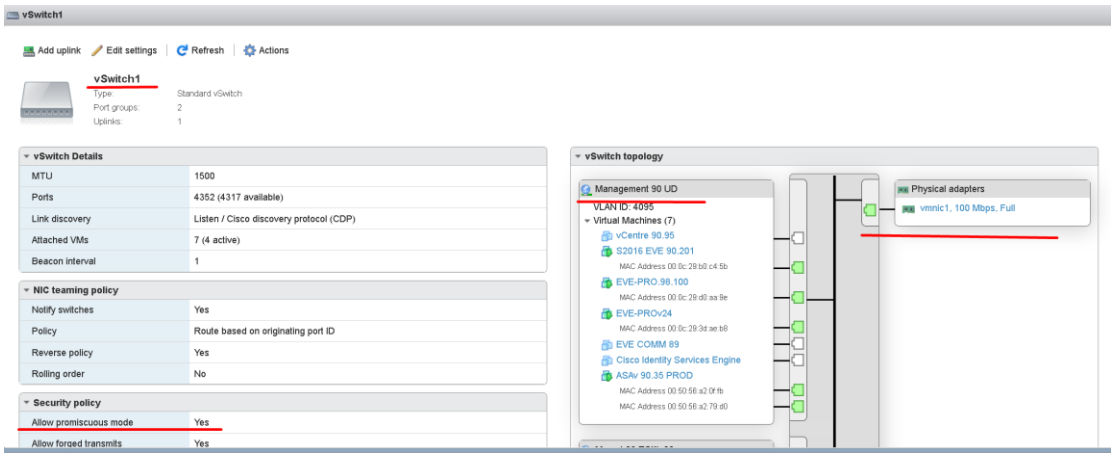


Portgroup “Management 90 UD” Settings associated with vSwitch1

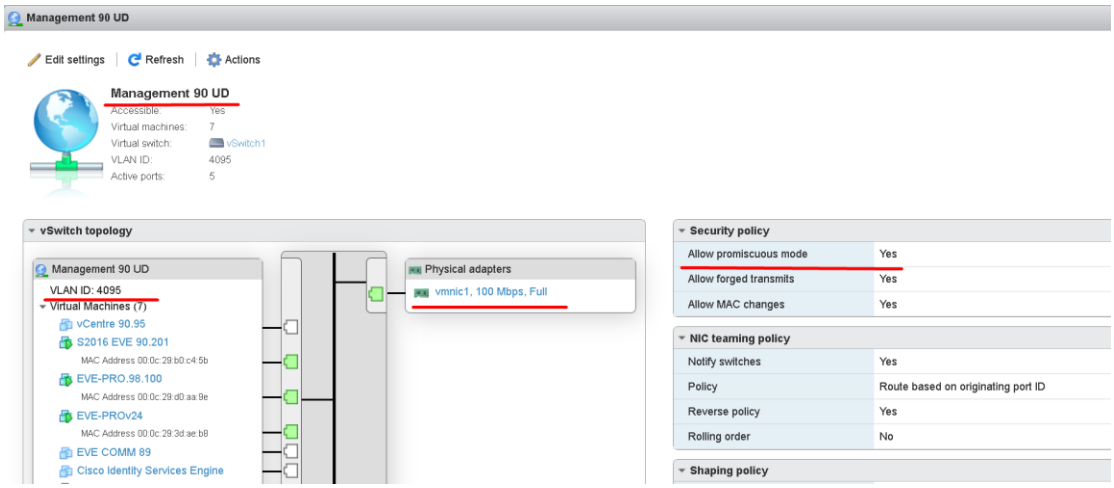

EVE VM Settings

EVE VM Cloud0 is connected to Portgroup “Management 90 UD”

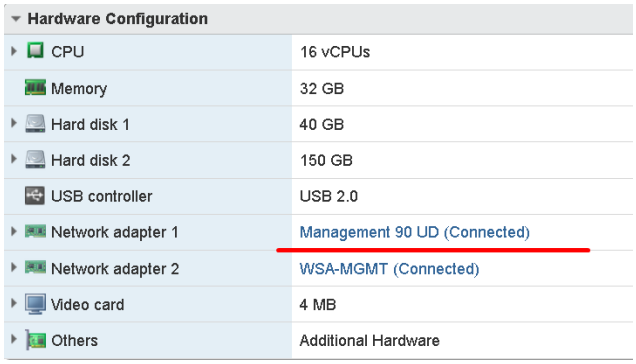


EVE Lab Connected to a physical device

Physical Topology


© EVE-NG LTD

Cisco 887M device port Fastethernet 3 is physically connected to Server port eth1.

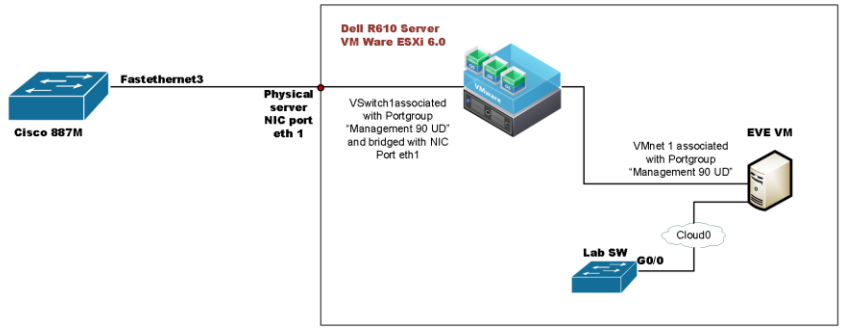

EVE Lab Topology

EVE lab switch port G0/0 is configured as trunk and connected to Cloud0 over bridged chain to the physical Cisco 887M Router switchport Fastethernet 3

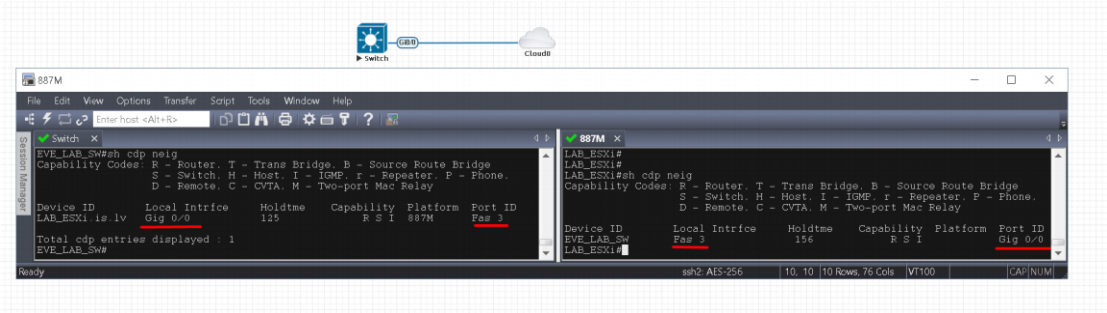


10.9.2 VMWare workstation EVE

Similar to the ESXi connection, it is recommended to have a second ethernet interface on your PC. It can be a USB ethernet extender as well. Not all ethernet adapters fully support a layer2 connectivity over it. MS Windows OS itself strips off any tags added to the packet. Even if your NIC supports 802.1q VLAN tagging, Windows 10 strips these tags off. The example below will show a Windows 10 host connected to a physical 3750G-24 switch. The Windows 10 Host has an Intel (R) PRO/1000 PT Dual port server adapter and is bridged with VMWare workstation (version 14) VMnets.

Virtual Network Editor Settings, Bridged VMnet interfaces with Real NIC Ports

© EVE-NG LTD

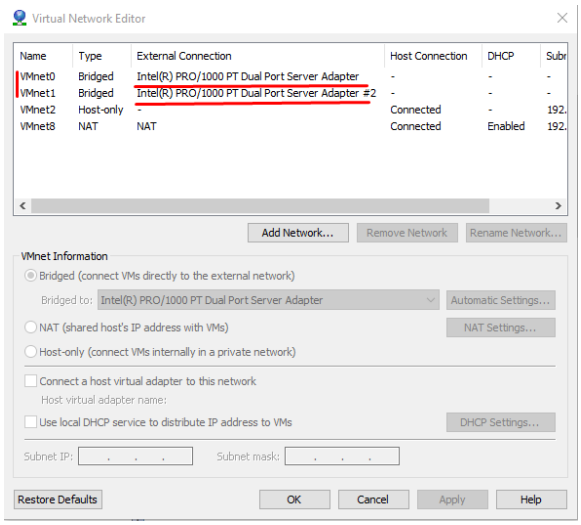


EVE VM Settings. Network adapter is bridged to VMnet0 (ethernet Intel Pro 1), and Network adapter 2 is bridged to VMnet1 (ethernet Intel Pro 2).

Responding cloud interfaces on EVE VM:


Cloud0→Network Adapter→VMnet0→IntelPro

Cloud1→Network Adapter 2→VMnet1→IntelPro#2

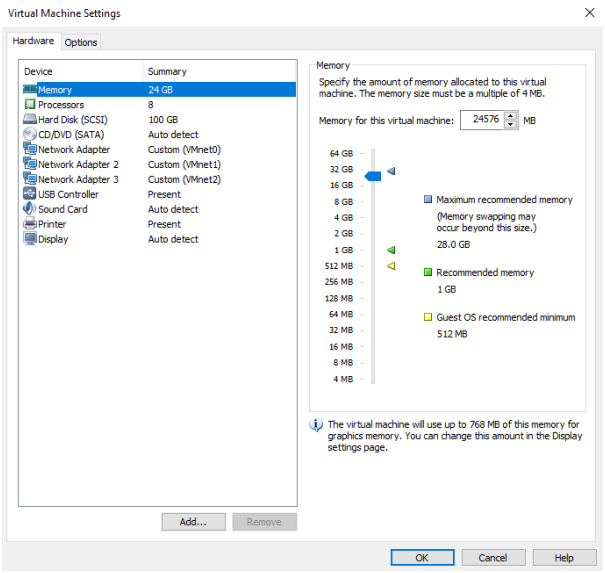


Physical connection scheme and VMware bridging.

© EVE-NG LTD

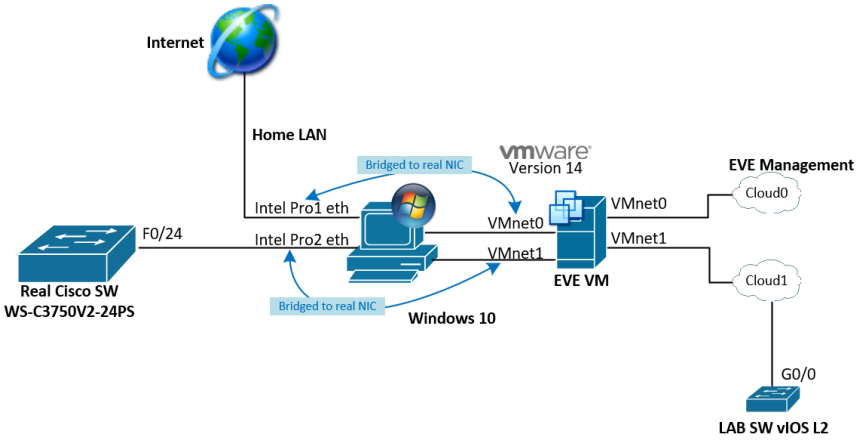

EVE Lab scheme.

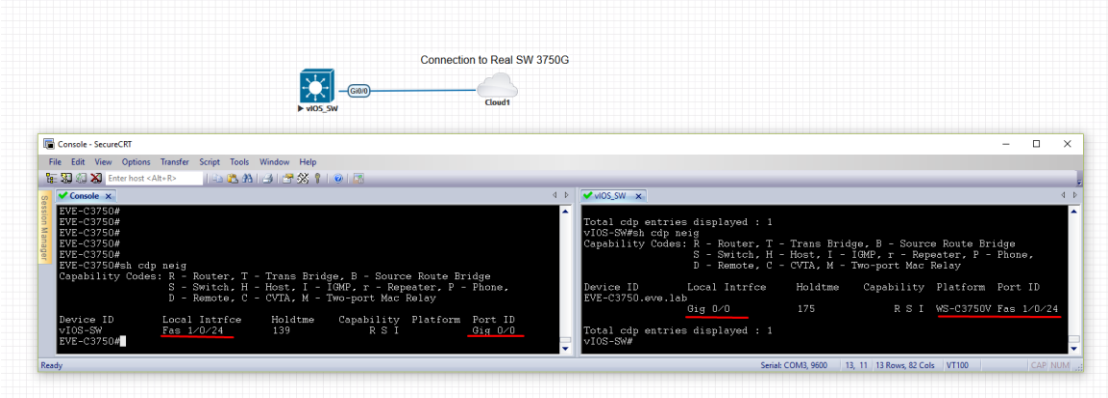

The following solution allows Windows hosts to transmit tagged packets over ethernet. This has been used in the example above.

> ⚠ Warning. You are making changes to your Windows registry files! This is at your own risk.

https://www.intel.co.uk/content/www/uk/en/support/articles/000005498/network-and-i-o/ethernet-products.html

10.9.3 Bare metal server EVE

A physical server usually has more than one ethernet port, free ports can be bridged with EVE clouds and used for external connections. EVEs internal interface settings are already bridged in order, pnet0-9 are mapped to eth0-9. Refer to the bridging table in section 10.6

```
# Cloud devices
iface eth1 inet manual
auto pnet1
iface pnet1 inet manual
    bridge_ports eth1
    bridge_stp off

iface eth2 inet manual
auto pnet2
iface pnet2 inet manual
    bridge_ports eth2
    bridge_stp off
```


```
cat /etc/network/interfaces
```

Basically, your servers physical port eth0 is bridged to pnet0 which is Cloud0 in your labs, eth1 is bridged to pnet1 which is Cloud1 in your labs (and so on). Refer to the bridging table in section 10.6


The example below shows how to connect a bare-metal EVE server with a physical Cisco 3750E switch.

© EVE-NG LTD

Physical connection topology:

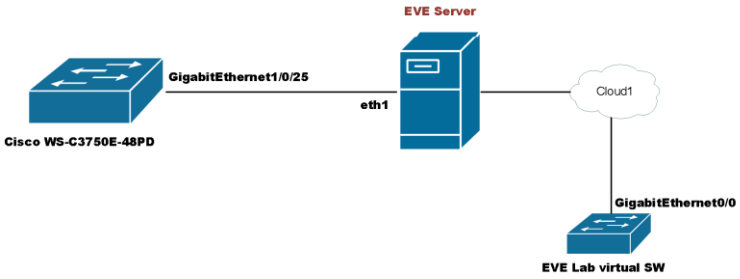

The EVE lab switch's CDP neighbor is the 3750E switch's port Gig 1/0/25: A trunk has been configured between the EVE lab switch and the physical 3750E switch.

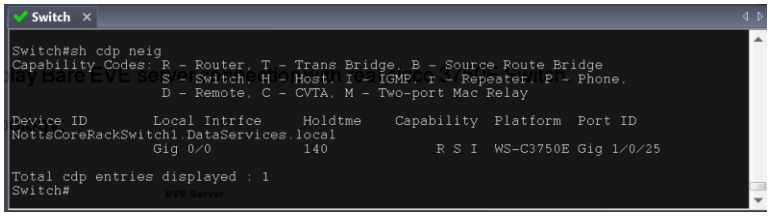




11 Advanced EVE Lab features

11.1 Lab design objects

EVE Pro has drawing elements integrates to add drawings and text information to the lab topology. Objects can be placed on the topology in two ways.

Example below, EVE lab with design elements:

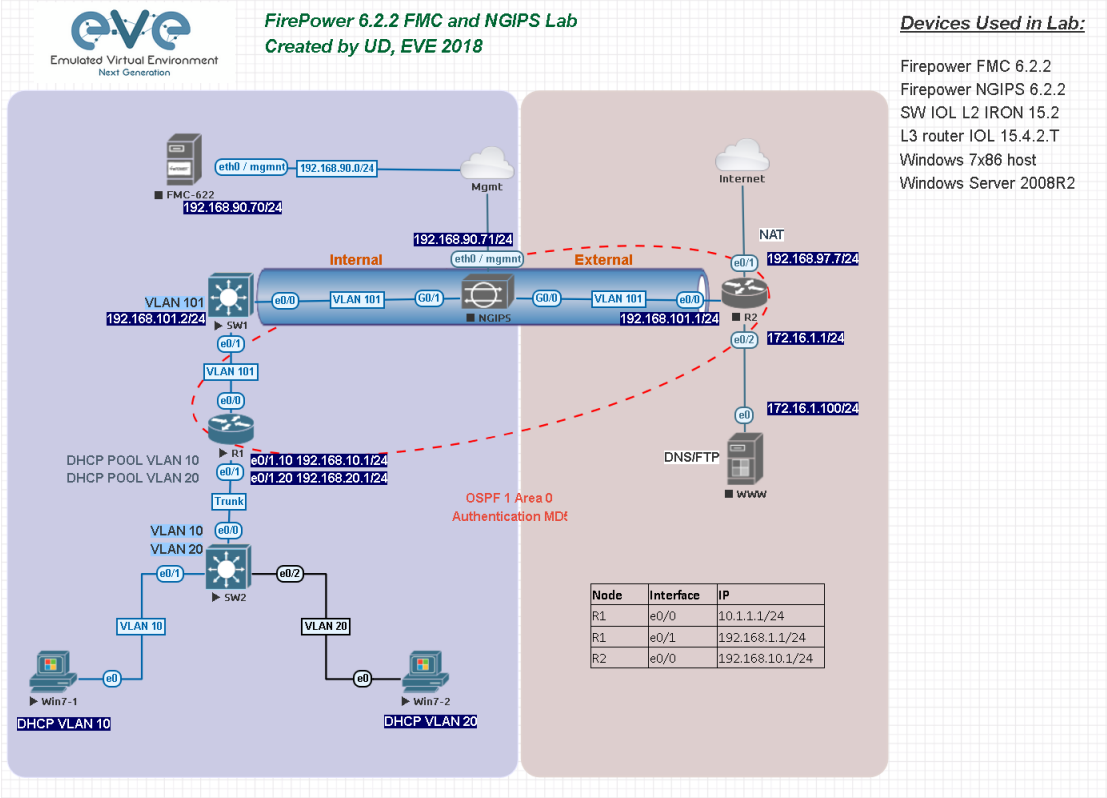

Option 1: Side bar -> Add an object	Option 2: Right-click on a free area on the topology canvas to add an object.
	


11.1.1 Custom shape

There are three custom shapes that can be added to the topology: square, round square and circle (sphere).

Type: Square, round square or circle

Name: This field can be filled with your preferred shape's name. If the field is left empty, EVE will generate a name for the shape.

Border type: Two options: line or dashed

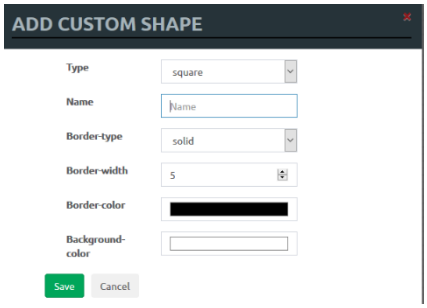


Border width: Increase or decrease the width of the border. This can be edited later in the "Shape Edit" menu.

Border colour: Allows you to choose a colour for the shape's border. This can be edited later in the "Shape Edit" menu.


Background colour: Allows you to choose a colour to fill your shape with. This can be edited later in the "Shape Edit" menu.

Example: Added a circle and square on the topology. Shapes can be moved around the topology drag and drop style (click and move with mouse).




11.1.2 Resize square or circle objects

Move your mouse over the right bottom corner of the object until a corner symbol appears. Left click and drag your mouse to change object size or style (rectangle, sphere)




11.1.3 Text


It is also possible to add text or other MS Office objects to your EVE topology. Rich HTML Office option allows you to copy texts from MS Word, Excel or Visio.




© EVE-NG LTD

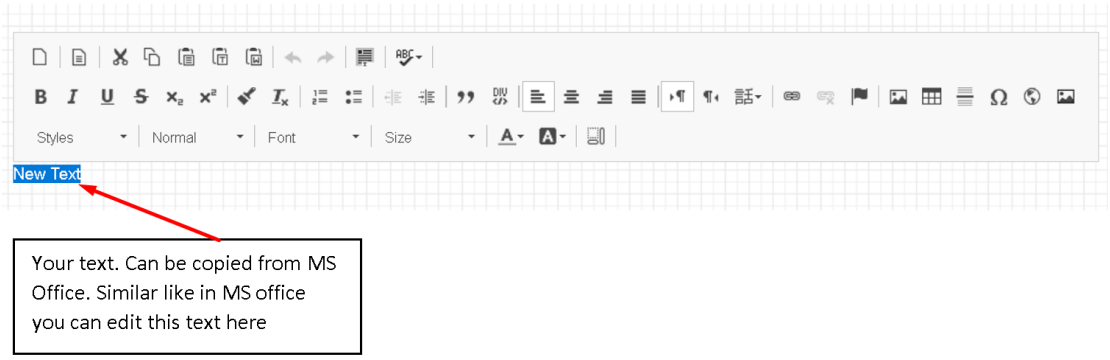


Example: Excel table on topology:

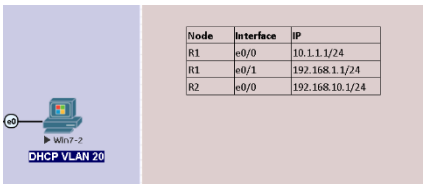



Example: text objects added to the topology.

Example: Visio object added to the topology

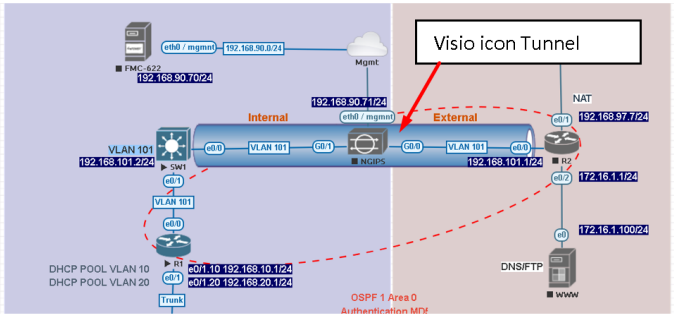

11.1.4 Add picture to the topology


Custom images may be added by using HTML editor:

Step 1: Add a text object to the topology and press Image button for import.


© EVE-NG LTD



Step 2: User browse to import your image.

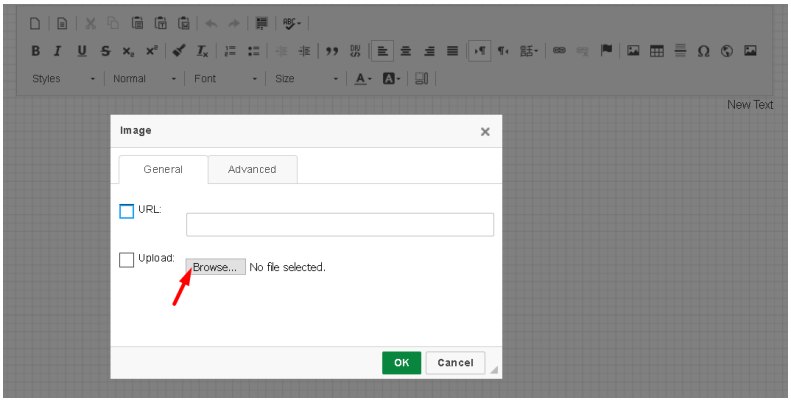

Step 3: Double click on object you wish to resize, then change width and height.

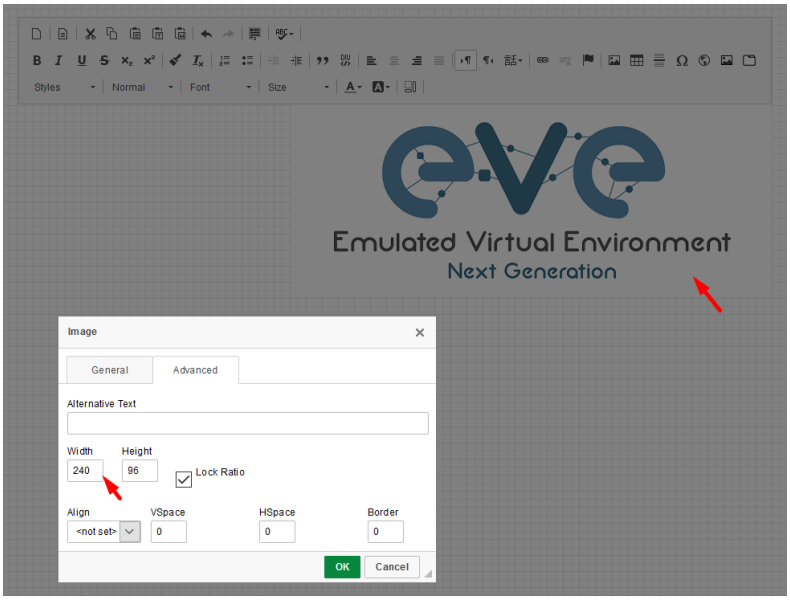


11.1.5 Custom object linking with telnet or other protocol

This feature allows you to link your eve topology object with external source. It can be web site or other protocol like Telnet to call out console for external object.

Step 1. Add the text or picture using HTML editor. Sections 11.1.3 or 11.1.4.


© EVE-NG LTD

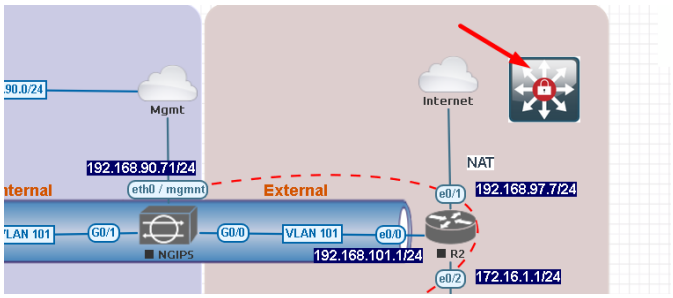


Example: Custom icon added from MS Visio.

Step 2. Position your object in place where you want it to be.


Step 3. Highlight text or activate object.

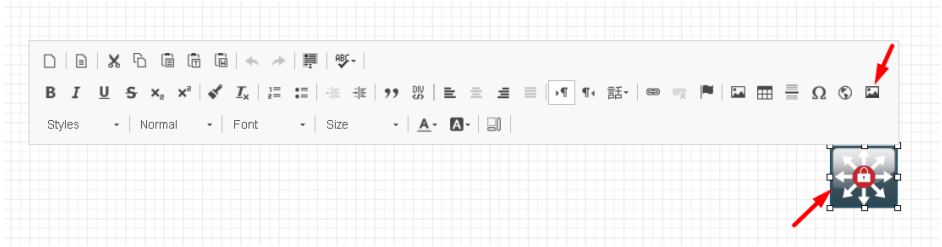

Step 4. Use link button to assign custom protocol for your object. Example: Protocol Other, type in URL: **telnet://10.1.1.10**

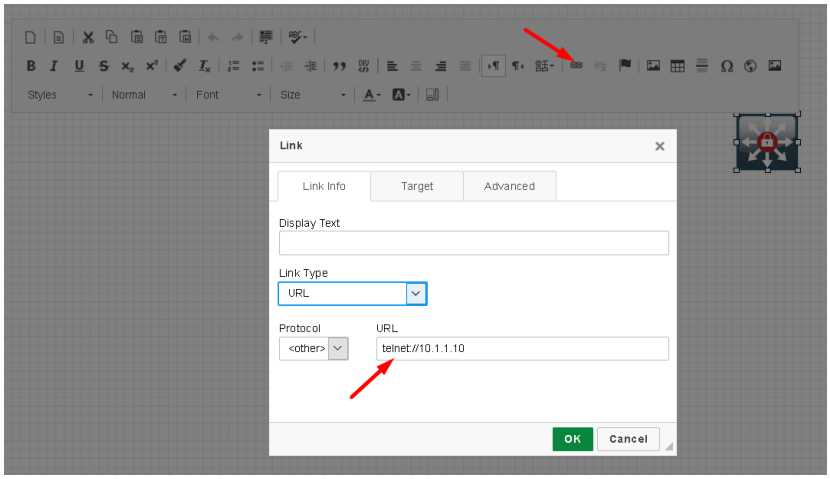

Step 4. Tab Target, Example: Target/New Window

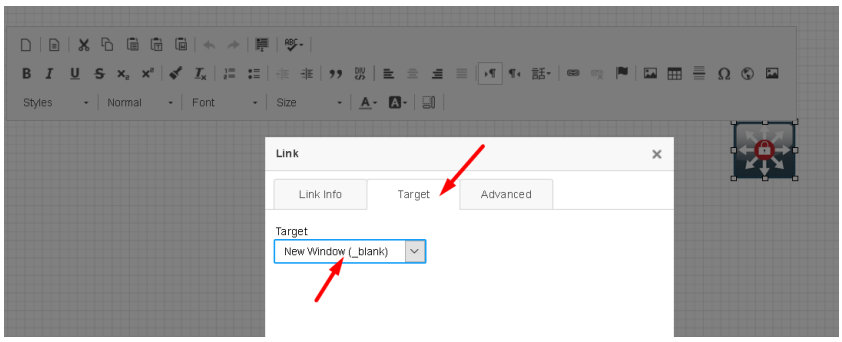

© EVE-NG LTD

Step 5. OK for Save.




⚠ NOTE to edit picture object assigned with link, use mouse mark area of object and it and double click on area beside object.

11.1.6 Line object

Line object allows you to draw and design lines on the topology.

Step 1. Add a Line object to the topology

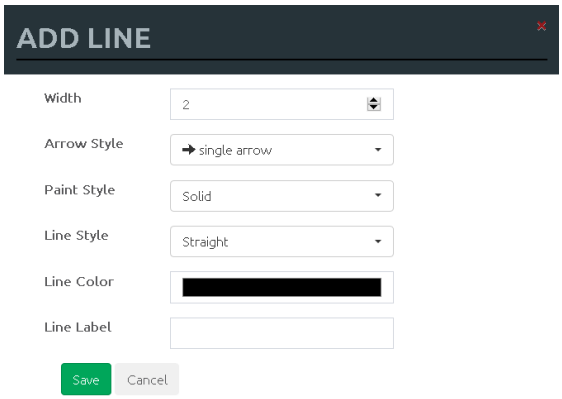

Width: Increase or decrease the width of the line. This can be edited later in the “Shape Edit” menu.

Arrow Style: Allows you to make arrows to your Line object. Single arrow, Double arrows or no Plain. This can be edited later in the “Shape Edit” menu.


Paint Style: Allows you to solid or dashed style for line. This can be edited later in the “Shape Edit” menu.

Line Style: Allows you to choose a style Straight, Bezier, Flowchart or StateMachine for the line. This can be edited later in the “Shape Edit” menu.


Line colour: Allows you to choose a colour for the line. This can be edited later in the “Shape Edit” menu.

Line label: Allows you to add a label on the line. This can be edited later in the “Shape Edit” menu.

Example, Dashed, Bezier, double arrow line with label:




Positioning and moving line object. Line object has invisible connection points at the ends. Use mouse to find that point, drag and drop move line connection point to your preferred lab location. Use mouse to move other line endpoint on lab location.

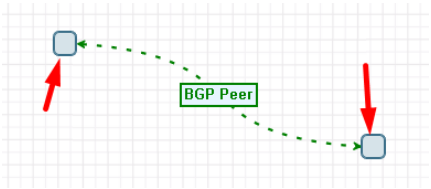

To move all line, use CTRL to mark line endpoint and move line over topology to position it.

Edit Line object. Right click on line to call out edit window:



© EVE-NG LTD




11.1.7 Nodes connection links design

Refer Section 9.1.5


11.1.8 Cloning objects and overlay positions

Right click on the object you want to clone and choose “Duplicate”. You can also change the object’s overlay position using the “Send to Back” or “Send to front” options.



11.1.9 Objects Editing


Right click the object and choose “Edit” for additional options.



At the bottom of the “Topology Canvas” page, additional object options will appear



Z-index: Used to change the object’s overlay position on the “Topology Canvas.” An object with a higher numerically valued z-index will cover an object with a lower numerically valued z-indexed.



Example: The blue object has a z-index of -1 and the orange object’s z-index is 0. Orange object is top over blue object.


Border width: Used to change the object’s border width.

Border type: Used to change the border style of the object between solid and dashed.


Border colour: Used to change the colour of the object’s border

Background colour: Used to change the background colour of the object

Transparent: Turns off background colour (filling) and makes the object transparent.



© EVE-NG LTD

Rotate: Used to rotate the object on the  topology.

Name: Used to change the object's name.

To save the object, press Save (green button). 

11.1.10 Lock objects movement

The "Lock Lab" feature prevents objects from being moved around on the canvas (among other things). For more information about this feature, refer to section 8.1.14.


11.2 Custom design logical topology

EVE Pro includes a feature to upload your own custom topology picture and map nodes to it for easy access.


11.2.1 Custom design upload

Before you upload a custom picture in the lab, make sure it is in .png or jpg format with resolution 130-150x130-150 pixels.


TIP: It is best is to create a topology in the MS Visio and after convert it to the .png picture format with resolution 140x140.




Step 1: Open "Add an Object" and then "Pictures" from the left sidebar or right click on a free area on topology canvas and hit "Add Picture."



Step 2: Browse your PC for a .png or .jpg file and hit "Add".

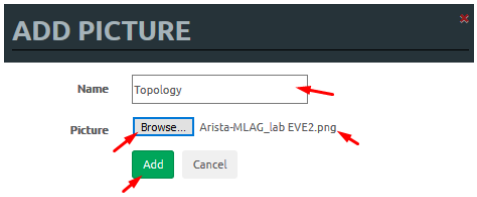

Once the picture is added to the topology canvas, the sidebar will display a new option: "Logical maps"

Step 3: Open the “Logical maps” menu item. 

Pictures window management

	Delete uploaded picture from the lab
	Image Map: Map nodes to places in the picture
Topology	Display uploaded picture. Work with lab and custom topology
	Zoom/unzoom uploaded custom topology
	Makes the window transparent to see the “Topology Canvas” behind it. Clicking again returns to the normal view.
	Close “Pictures” window.


11.2.2 Custom topology mapping

This feature allows you to map the lab nodes to your custom topology picture.


Step 1: Open the Image Map window:



Step 2: Select a node, from the dropdown menu, that you want to map to the topology.

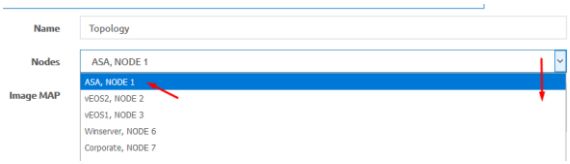


Step 3: Move your mouse over a node icon on the “Image Map” and click to map it. The grey circle means that the node is mapped.



Step 4: Continue mapping the rest of the nodes.

© EVE-NG LTD

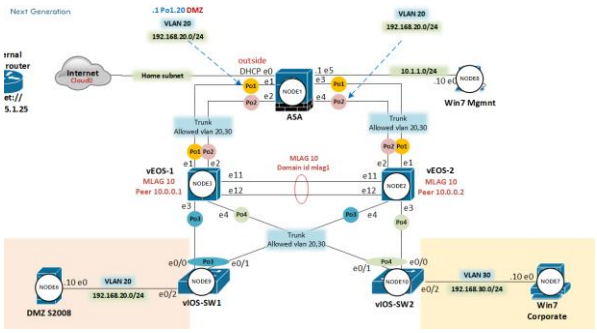

Step 5: OPTIONAL. You can also add a mapping for a device external to your EVE server in order to telnet, VNC, or RDP to it. This way you can open sessions to all your devices (whether external or internal) in one place.

Select from menu: 

And map with node on topology. 

Change image map adding protocol, IP and port.







Step 6: Save your mapping and refresh the browser with F5. 

11.2.3 Delete topology or mapping

To delete a single node mapping, right click on node mapping circle and click “Delete.”



To delete the entire custom topology, click delete. 

11.3 Multi-configuration sets export feature

Eve Professional/Learning Center includes a "Multi-configuration Set" feature that allows you to save and manage multiple sets of configurations in a single lab. The "Configuration Export" and “Startup-configs” features will allow you to set these saved configurations as startup configs for your nodes when they boot.


⚠ **IMPORTANT NOTE**: Before you start using the “Multi-configuration Set” feature, you must complete at least one configuration export.

© EVE-NG LTD



Nodes will be greyed out without the option to enable “Startup-configs” until you complete at least one configuration export for each node.

Node boot order:

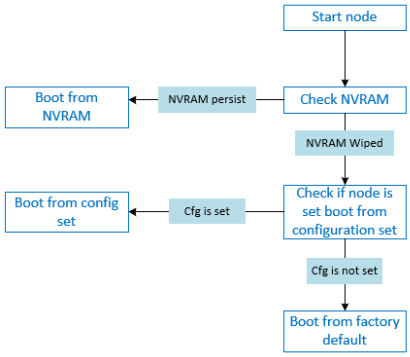

NVRAM: NVRAM is used as writable permanent storage for the startup configuration. During the boot process, the node will always check NVRAM for a saved configuration. Saving the configuration to NVRAM requires a vendor specific command. Cisco: copy run startup (wr), Juniper: commit, etc. It is MANDATORY to save a node’s configuration before you can export it.

Exported configuration: A node configuration that has been exported from the node. It can be used to backup configurations or to set them as startup-configs.

Wipe node: Wiping a node will erase the NVRAM (running config) or the temporary image snapshot, depending on the type of node. Upon a successful wipe, the node will boot with the factory default configuration or the configuration included in the base image you are using. If you have the “Startup-config” feature enabled for the node, then it will boot with the chosen config set. You must wipe a node after changing certain node template settings like the image or startup-config. You also must wipe the node the first time you want to enable the “Startup-config” feature.

Factory default configuration: The base configuration that is applied from the manufacturer.

11.3.1 Supported nodes for configuration exports


Cisco Dynamips all nodes
Cisco IOL (IOS on Linux)
Cisco ASA
Cisco ASAv
Cisco CSR1000v
Cisco Nexus 9K
Cisco Nexus Titanium
Cisco vIOS L3
Cisco vIOS L2

© EVE-NG LTD

Cisco Viptela vEdge, vSmart, vBond
Cisco XRv
Cisco XRv9K
Juniper VRR
Juniper VMX
Juniper vMX-NG
JunipervQFX
JunipervSRX
Juniper vSRX-NG
Mikrotik
PFsense FW
Timos Alcatel
vEOS Arista


11.3.2 Startup config management

11.3.2.1 Global commands



Configurations can be managed via the “Startup-configs window which can be accessed from the sidebar menu while on the Topology page.

Topology page, More Options:

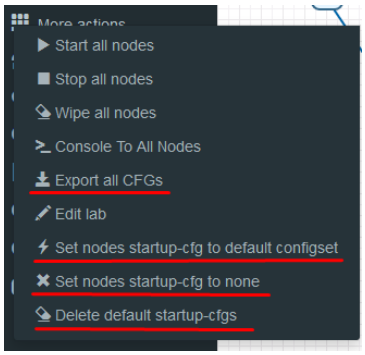

Export all CFGs – Exports all supported node configurations.


Set nodes startup-cfg to default configset- Sets all supported nodes to boot from the default configuration set.

Set nodes startup-cfg to none - Sets all supported nodes to boot from NVRAM configuration.

Delete default configuration set. Warning, this will delete your exported default configuration set for all nodes.

11.3.2.2 Individual node commands

Select node, right click




Wipe: Wipes the NVRAM for a single node

Export CFG: Exports the configuration for a single node

© EVE-NG LTD

11.3.2.3 Multiple selected nodes commands

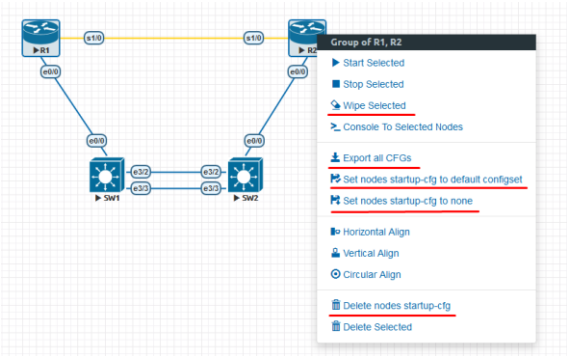

Wipe Selected: Wipes the NVRAM for selected nodes

Export all CFGs: Exports the configuration for selected nodes


Set nodes startup-cfg to default configs set: Set selected nodes to the default config set

Set nodes startup-cfg to none: Set nodes to boot from NVRAM or from factory default if wiped.


Delete nodes startup cfg: Delete selected node's startup cfg. (clean default set)

11.3.2.4 Startup-configuration window

No configuration exports or manual configs loaded for nodes




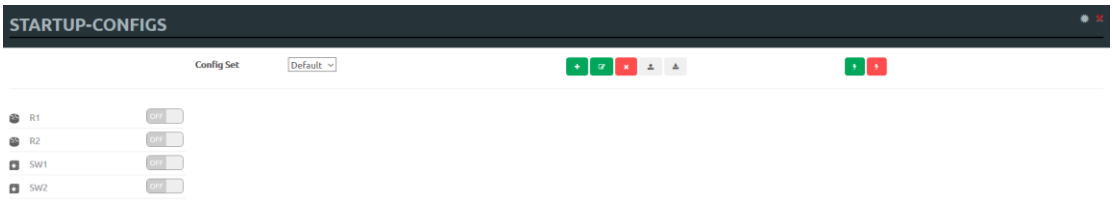



Startup-configs are exported and the "Configuration Export" feature can be used.

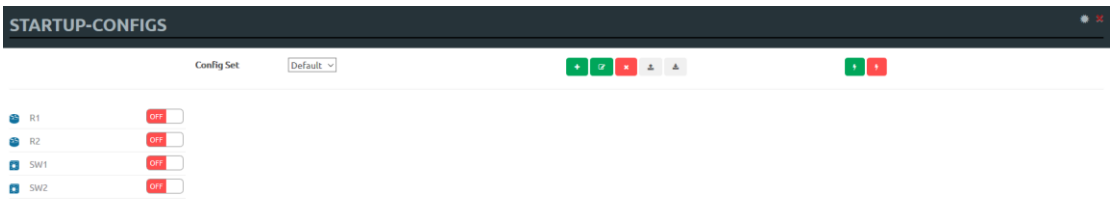

11.3.2.5 Startup-config window information

Config Set Default	Config set menu


	No configuration is available for node. Grey node
	Configuration is available and can be used. Blue node. Exported configuration persist
	Configuration persist but it is disabled. Node will boot from NVRAM or factory default if it is wiped
	Configuration persists and node will boot from the configuration after being wiped
	Add new config set.
	Rename config set. The Default Config Set cannot be renamed.
	Select a Config Set and delete it. You cannot delete the Default Config Set. The Default configuration set can be cleaned using the sidebar / More options / **Delete default configuration set**
	Upload configuration set from your local PC
	Download configuration set to your Local PC
	Apply Config Set button: Sets all nodes to boot from the chosen config set.
	Config Reset button: Sets all nodes to boot from none. Node will check boot order. If the Wipe function is used, nodes will boot from factory default.
	Individual node export or import configuration. Configuration export/import file format is .txt.

	Ace Editor. Different vendor configuration edit option. Just Text visual format.

11.3.3 Export Default configuration set

NOTE: The default configuration set is hardcoded. It is mandatory to export a nodes config before you can start building custom configuration sets.

Example:




Step 1: MANDATORY: Configure your nodes and make sure you applied the vendor specific command to save the running configuration to NVRAM. If you do not save the configuration, it will not be exported and in the notification area, you will receive an error message stating the node cannot be exported.

In this example the nodes have been configured with hostnames only and the configurations have been saved to NVRAM.

Step 2: Chose any method to export configurations to the Default Config Set. You can use export a single node, a group of nodes, or all nodes. Only supported nodes configurations will be exported.

Step 3: In the example below a group of nodes were selected to export configurations.

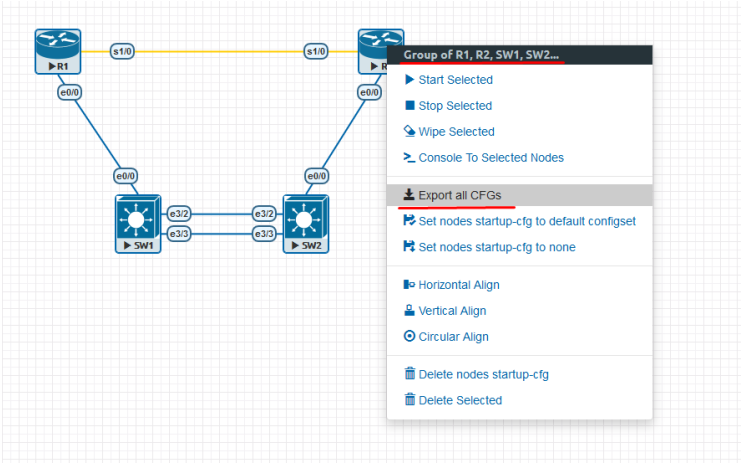



Default configuration set is completed. The notification area will display “Export All: done” when complete.


NOTE: you can configure your nodes with your preferred configuration and make it the default configuration set.

© EVE-NG LTD

11.3.4 Boot nodes from exported Default config set

Step 1: Stop all nodes

Step 2: Open sidebar and click Startup-configs. Make sure your config is set to default and the nodes config switch is green (switch on/off beside node). Press the green “Apply Config Set” button (Set all nodes to selected config set) and all your nodes will boot with the default config set after wiping them.

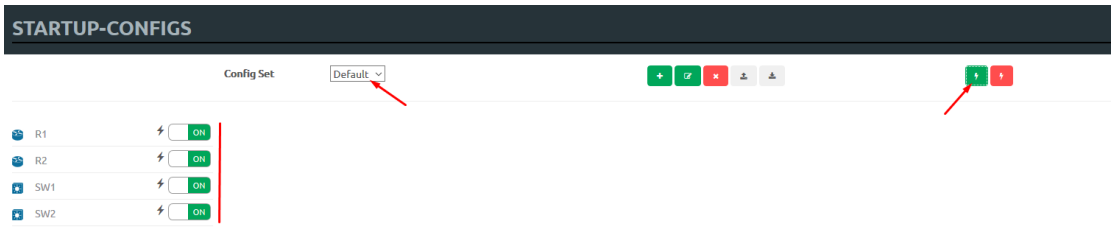

Step 3: Wipe nodes. For more information refer to section 9.1.3


Step 4: Start nodes

11.3.5 Export new custom config set


This section will describe how to create a new custom configuration set for the same example above.

⚠ Make sure your nodes are running and booted from the default set.

Step 1: Create new custom named (e.g. “IP Addressing”) configuration set, Press Add new config set.

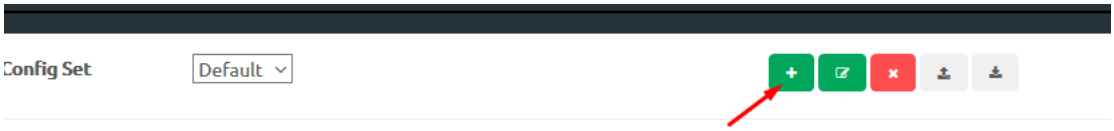

Name it and press Add.

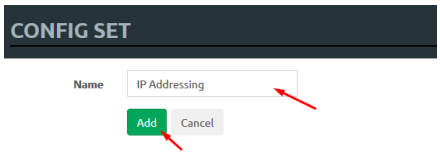


The new configuration set is created.


⚠ **NOTE:** It will duplicate the default configuration set under your IP Addressing config set.

Step 2: Select newly created Config set IP Addressing and hit the green confirm button (Set all nodes to selected config set) on the right.

© EVE-NG LTD



Step 3: Make sure your nodes have the Startup-config slider switched to “ON” and verify the config set menu has the “IP Addressing” set selected.

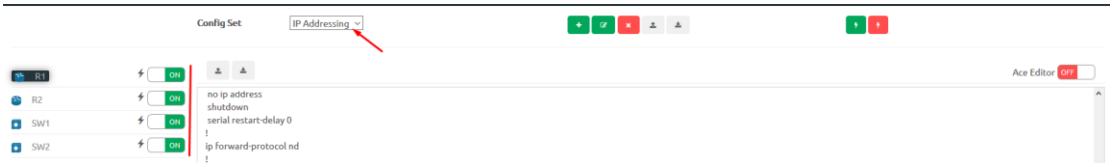


Step 4: Return back to your lab and continue configuring nodes until your preferred configuration is complete. In this Example, the IP addresses are configured on the nodes.

Step 5: IMPORTANT: YOU MUST save the configuration on all nodes, even if the configuration was not changed.

Step 6: Use any method (individual, group or all) to export the new configurations to the IP Addressing set.

Step 7: You can verify that the configs were exported by re-opening the “Startup-config” window.

Make sure the correct config set is selected, and check if the configuration is exported for the node or nodes.

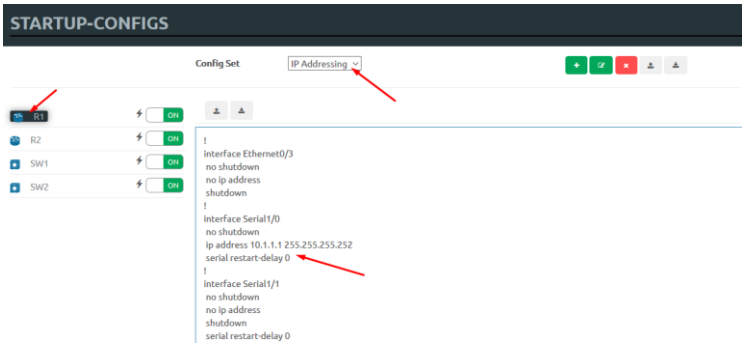


Repeat steps 1-7 of this section for the next configuration set.

11.3.6 Edit exported configurations


It is possible to edit your configurations for the nodes manually.

Step 1: Select a config set and apply it with the green confirm button (Set all nodes to selected config set) on the right.



Step 2: Select the node you want to edit the configuration of and make your changes. Click “Save” when you are finished.

© EVE-NG LTD

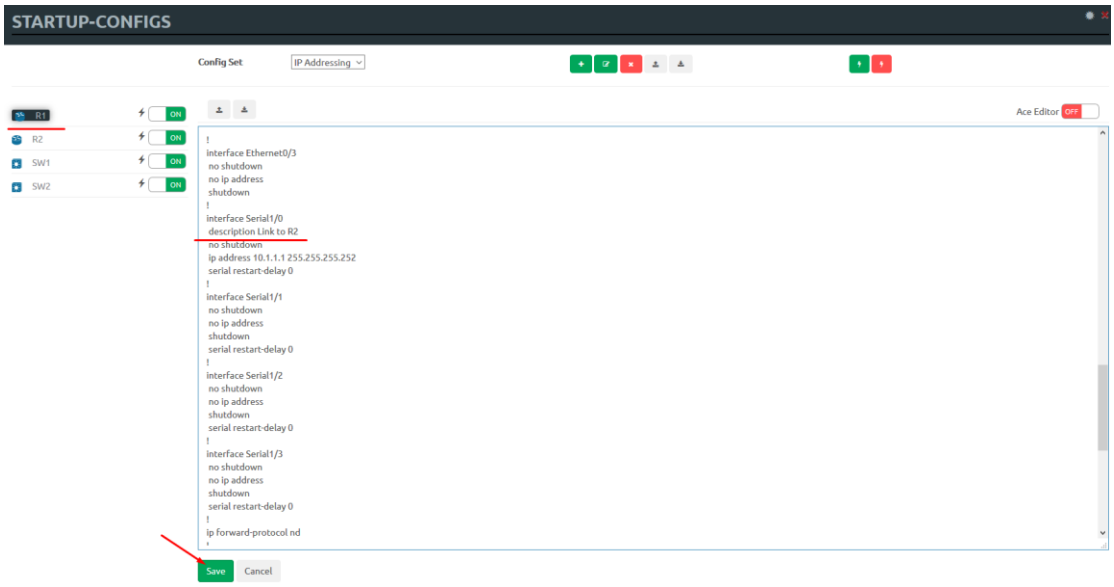

Step 3: Apply the config set to all nodes with the green “Apply Config Set” button on the right (Set all nodes to selected config set).



⚠ NOTE: you can manually copy/paste any configuration into the config set editor and apply it to your node. Make sure your configuration interfaces match the lab node’s interface names.

11.3.7 Set lab to boot from config set

To set your lab nodes to boot from the exported configuration, follow the steps below:

Step 1: Wipe nodes. Refer to section 11.3 for information about wiping nodes and the order of operations during boot.

Step 2: Open the “Startup-configs” window from the left sidebar.

Step 3: Select your preferred config set and apply it by pressing the green “Apply Config Set” button on the right (Set all nodes to selected config set).



Step 4: Start nodes.


11.3.8 Set lab to boot from none

To reset your lab nodes’ configuration to factory default follow the steps below:

Step 1: Wipe nodes. Refer to section 11.3 for information about wiping nodes and the order of operations during boot.

Step 2: Open the “Startup-config” window from the left sidebar

Step 3: Press the red “Config Reset” button on the right (Set all nodes to no startup-config).



Step 4: Start nodes

© EVE-NG LTD


11.3.9 Delete a config set

Select the config set you want to delete and click the “Delete” button. You cannot delete the default config set.



11.3.10 Rename a config set


Step 1: Select the config set you want to rename. Change the name and hit “Save.” You cannot rename the default config set.

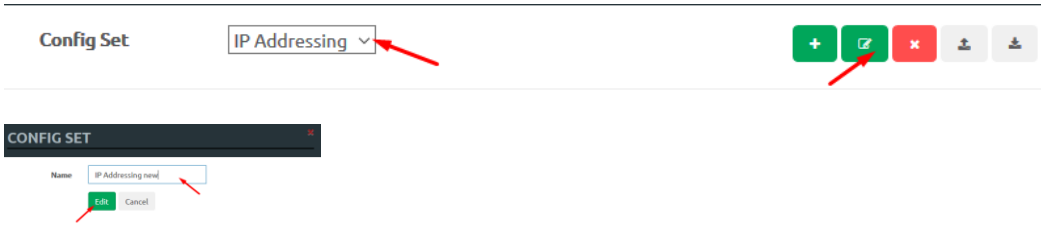

11.3.11 Export a config set to your local PC

It is possible to export configuration sets to your local PC.

Step 1: Select the config set you wish to export.

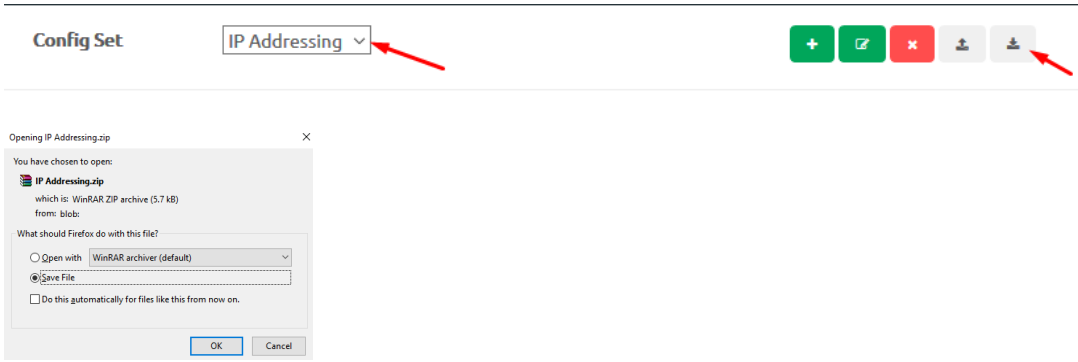

Step 2: Save it on your local PC.


NOTE: You can open this archive and edit your node configs manually. Archived configs are saved in txt format. After editing you can archive it back to .zip format and import it in EVE.

11.3.12 Import config set from local PC.

It is possible to import config sets to your lab.



© EVE-NG LTD

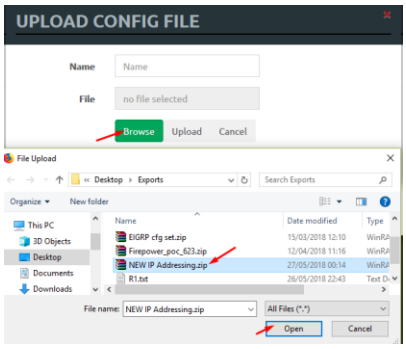


Browse to the file on your PC, select the archive or config set and upload it.

Uploaded config sets without a Name will appear in the config set menu with the name “Import”. To rename config sets, refer to section 11.3.10


11.3.13 Export a single nodes config to your local PC

Open the “Startup-configs” window from the Side bar. Select the node that you want to export the configuration of and click the “Export” button.

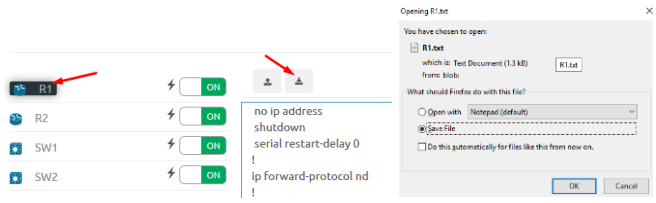

11.3.14 Import a single nodes config from your local PC

Open the “Startup-configs” window from the sidebar. Select the node that you want to import the configuration to and click the “Import” button. Browse to the file on your local PC and click “Upload.”

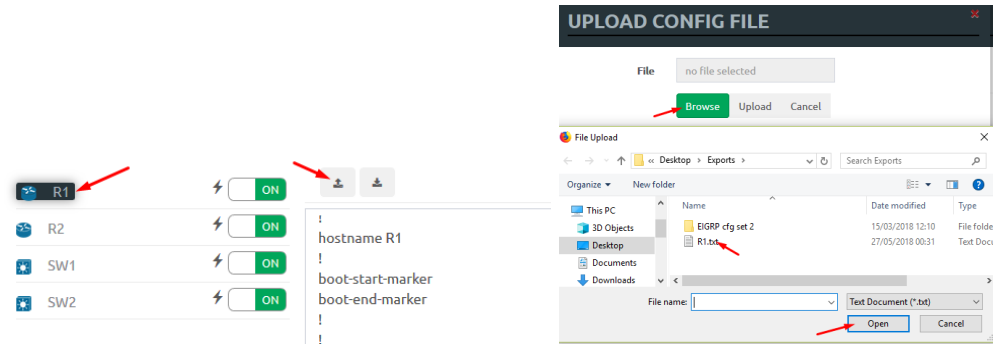


NOTE: The configuration must be in txt file format.

11.3.15 Set lab nodes to boot from different config sets


The “Multi Configuration set” feature allows you to set nodes to boot from different config sets in the same lab.

Option 1: Open the “Nodes” list from the left sidebar. Choose your node and select a config set from the dropdown. Stop the node, wipe it and start it again. Your node will boot from the selected config set.

© EVE-NG LTD

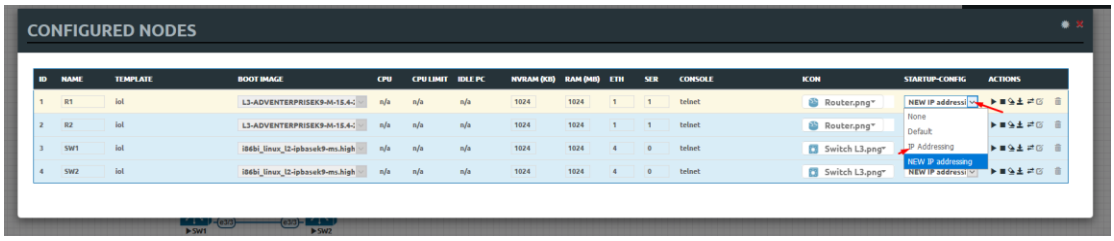

Option 2: Stop the node, right-click on the node and click “Edit.” Select your preferred config set for the node and click “Save.”

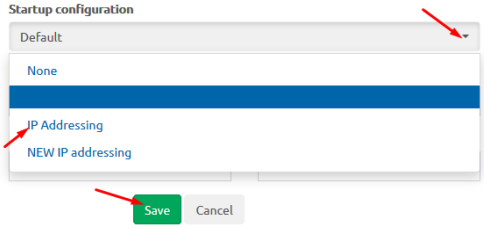

11.3.16 Lab config script timeout

Lab config script timeout is used when nodes are waiting to boot from a config set. The node will literally wait during boot until the configuration is applied from the config set.

Hit “More actions” and then “Edit lab” from the sidebar. Set the config script timeout in seconds. By default, this timer is set to 300 seconds for new labs.

⚠ NOTE: For heavy labs and nodes with long configurations, you can raise this timer to 600 seconds or higher.



11.4 Lab Timer

For self-controlled lab timing, EVE Pro has integrated a “Lab Timer” feature.

11.4.1 Set the Lab Countdown Timer


Step 1: Click “More Options” and then “Edit Lab” from the sidebar.

Step 2: Set the “Lab Countdown Timer” in seconds for the time you wish to display on the topology and confirm by clicking “Save”. 7200 seconds = 120 minutes.




Step 3: To start your lab, be sure all nodes are running.

Step 4: Hit “Lock Lab” from the sidebar. A red sign means that the lab is locked.




Step 5: When ready to start, click “Refresh Topology” from the sidebar. The countdown timer will be displayed on the “Topology Page” in the top left corner.



© EVE-NG LTD

11.4.2 Stop the Lab Countdown Timer

Step 1: Click “Unlock Lab” Grey means that the lab is unlocked. 

Step 2: Hit “Refresh Topology” from the sidebar


⚠ NOTE: The lab timer does not stop nodes or disconnect sessions from the lab.

11.5 Lab Tasks

Lab task or workbook creation feature.


11.5.1 Creating a new simple task

Step 1: On the side bar click on “Lab Task(s)” to open the Lab Task(s) management window.




Step 2: Click on the “+” sign to create a new task. Enter the name of the task name and click on “Add” to create the task.



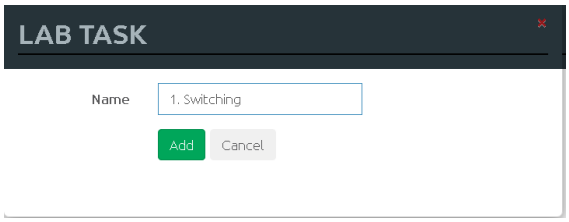


11.5.2 Edit a simple task

Step 1: Press the edit button next to the name of the newly created task.

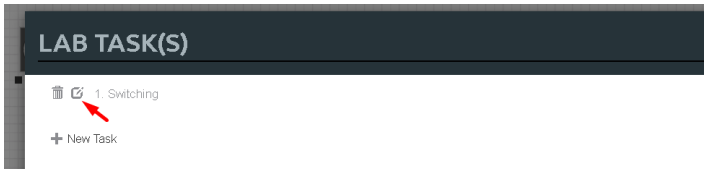

Step 2: Use the rich text editor Window to create your Task / Workbook. It is a recommended option to copy/paste task content from MS Word. Save your Task content by clicking on the “Save” button.


© EVE-NG LTD

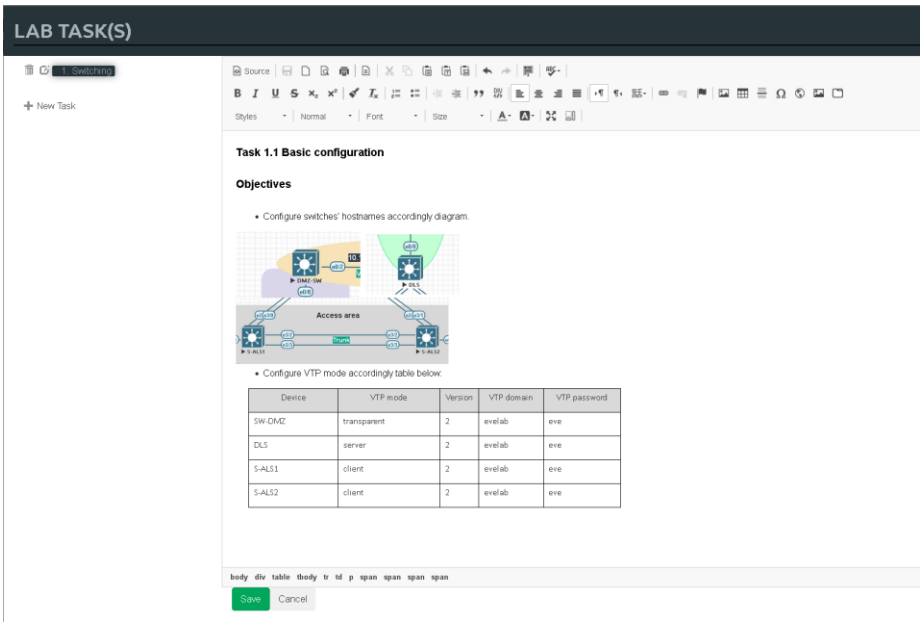

11.5.3 Create a multi tabs task (task on multiple tabs/pages)


Step 1: Click on the “+” sign to create a new task. Enter the name of the task name and click on “Add” to create the task.



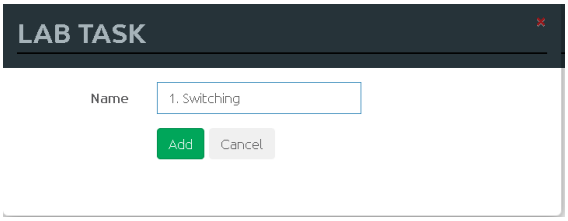


11.5.4 Edit a multi tabs task (task on multiple tabs/pages)


Step 1: Press the edit button next to the name of the newly created task.

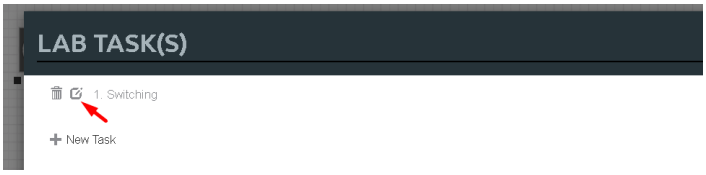


Step 2: Click on the “Insert tabs” button.

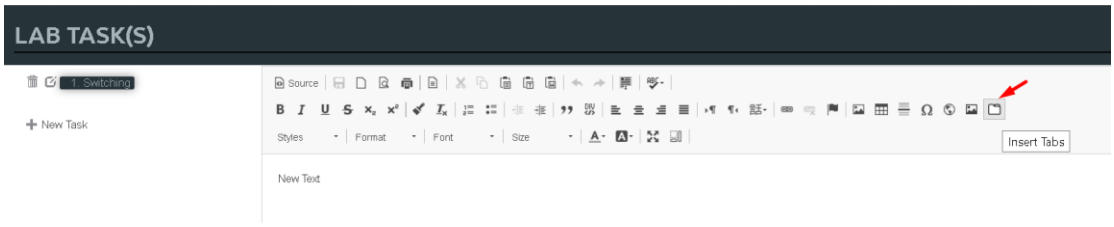

Step 3: Enter the name of your new task group and choose the number of tabs (must be between 2 and 9). Tab names can be changed later.

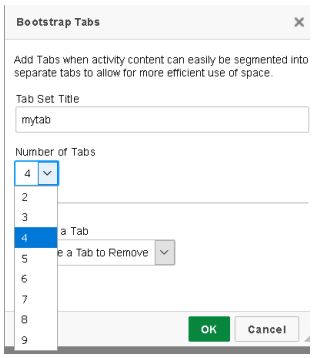

Step 4: To save your your tabbed task, press “Save”.

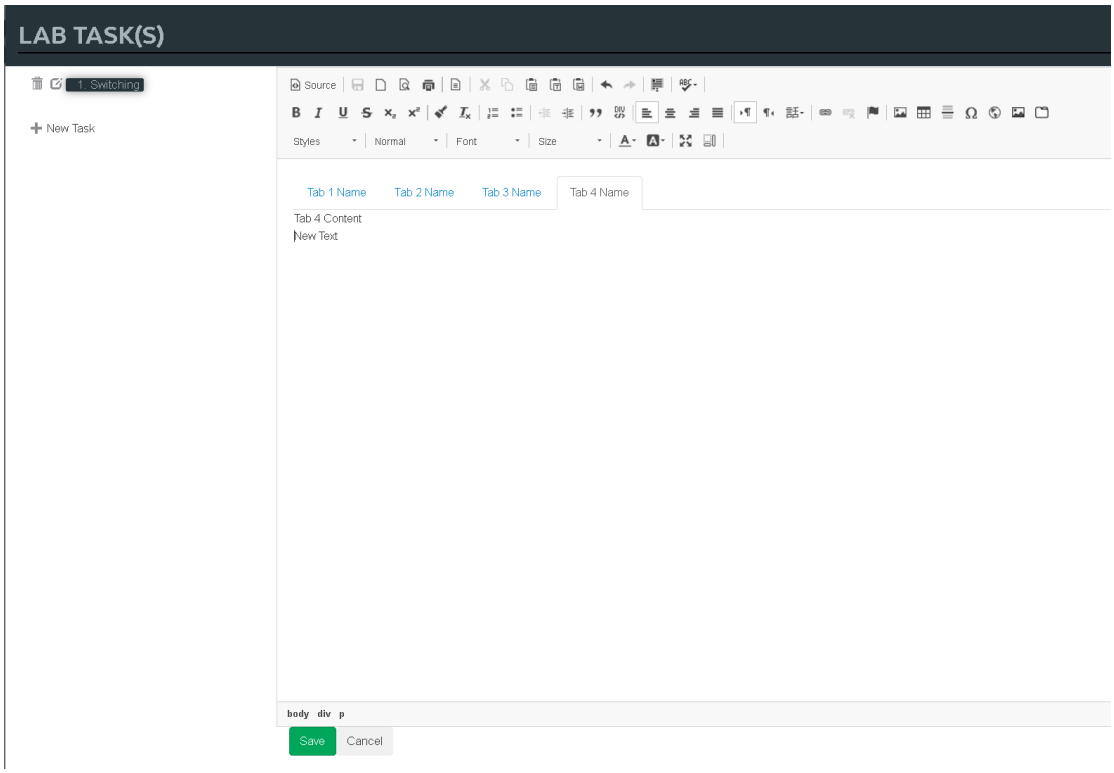


11.5.5 Edit tabs (Multi tabbed task).

Step 1: Activate the tab for which you want to edit its content and press the edit button.

© EVE-NG LTD




Step 2: Rename your tab,

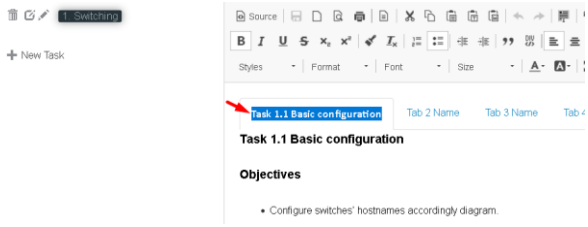

Step 3: Press the “Show Blocks” button, this will help find the right place to create the task tab content. Make sure that you are copying or creating the tabbed task content into the correct place (Tab 1 Content)

NOTE: It is strongly recommended to use “full screen” for the rich html text editor when you are working with tabbed tasks. Press the “full screen” button to work with tasks. Press it again to exit full screen mode.

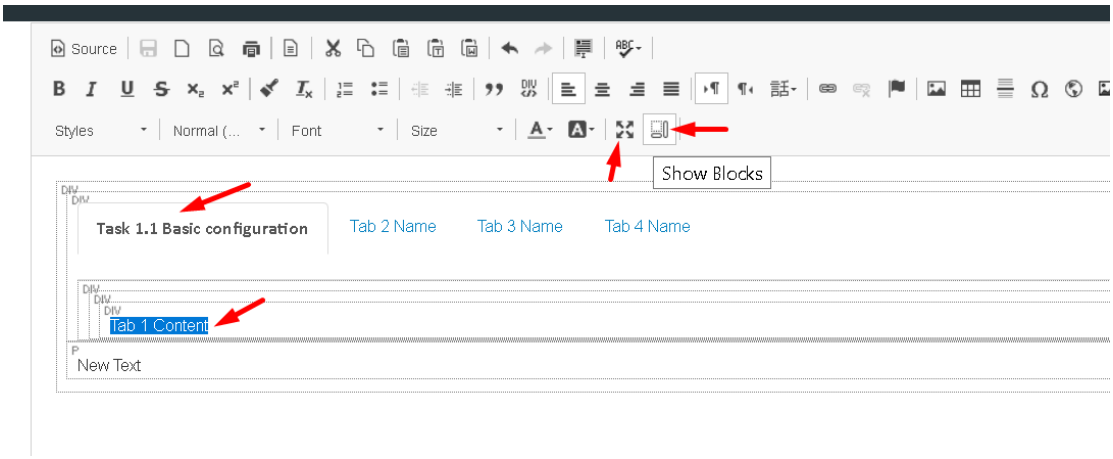


Step 4: Save your modified task by clicking on “Save”. To edit another tab, repeat steps 1-3.


11.5.6 Create a task with your PDF workbook

Step 1: create new Task and name it and press Add:


© EVE-NG LTD

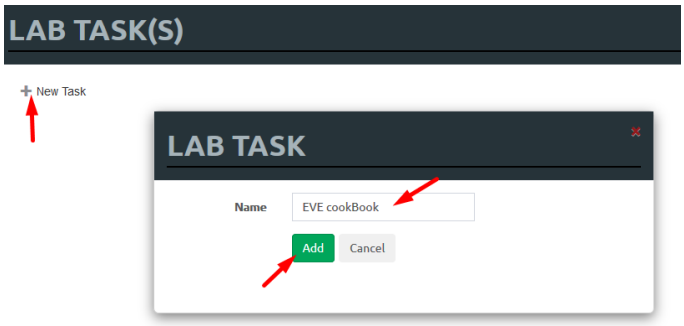

Step 2: Press edit Task and locate PDF button, Press it

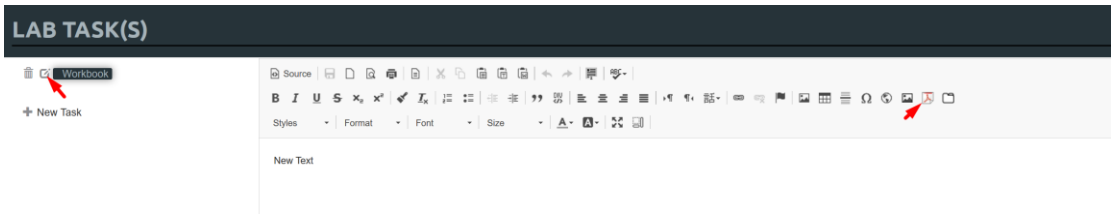

Step 3: Navigate to your pdf document, Press OK.



Step 4: To view your uploaded book, use, Side Bar/Tab Tasks/your taskname



© EVE-NG LTD


11.5.7 Create a task with Online document (PDF or HTML)

Online document or web site task (https ONLY, iFrame allowing use Secure http only)


Step 1: Have ready your link to online web site or document. Example:

https://www.eve-ng.net/images/EVE-COOK-BOOK-latest.pdf

Step 2: create new Task and name it and press Add:

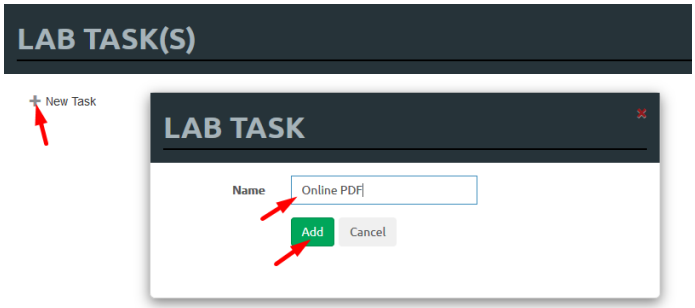


Step 3: Press edit Task and locate iFrame button, Press it

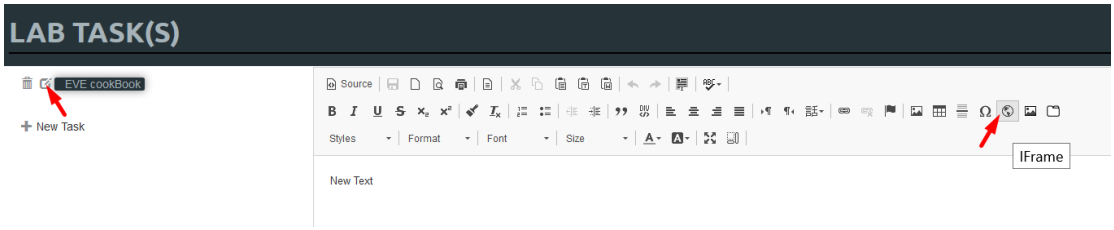


Step 4: Type the path to your online document, set Width to 100%, and Height resolution to 10000.

The path location is https://www.eve-ng.net/images/EVE-COOK-BOOK-latest.pdf, which prepared in Step 1. Press OK for iFrame properties and Save Task, Press Save

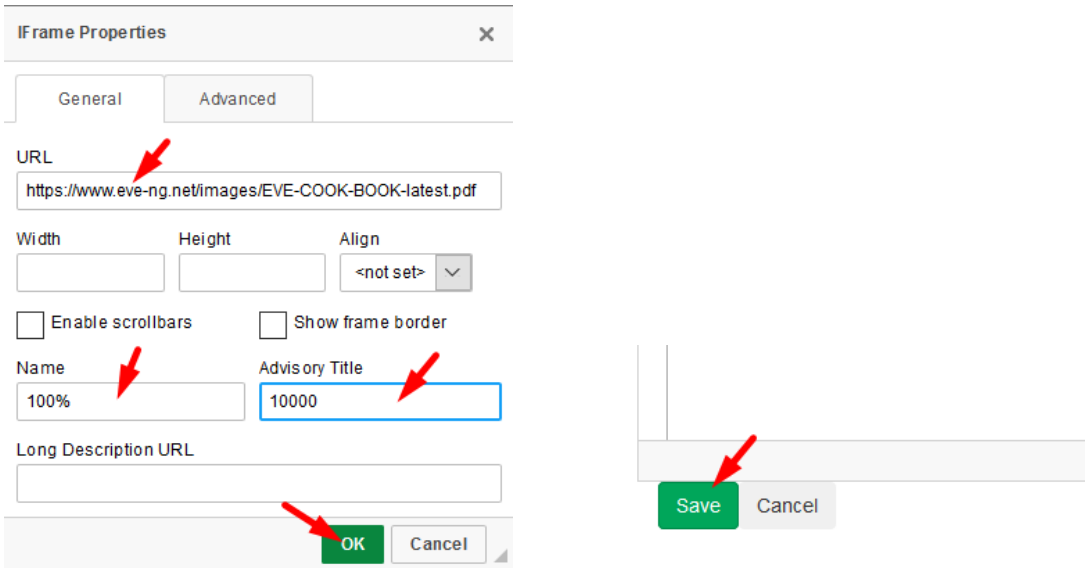


© EVE-NG LTD

Step 5: To view your uploaded book, use, Side Bar/Tab Tasks/your taskname

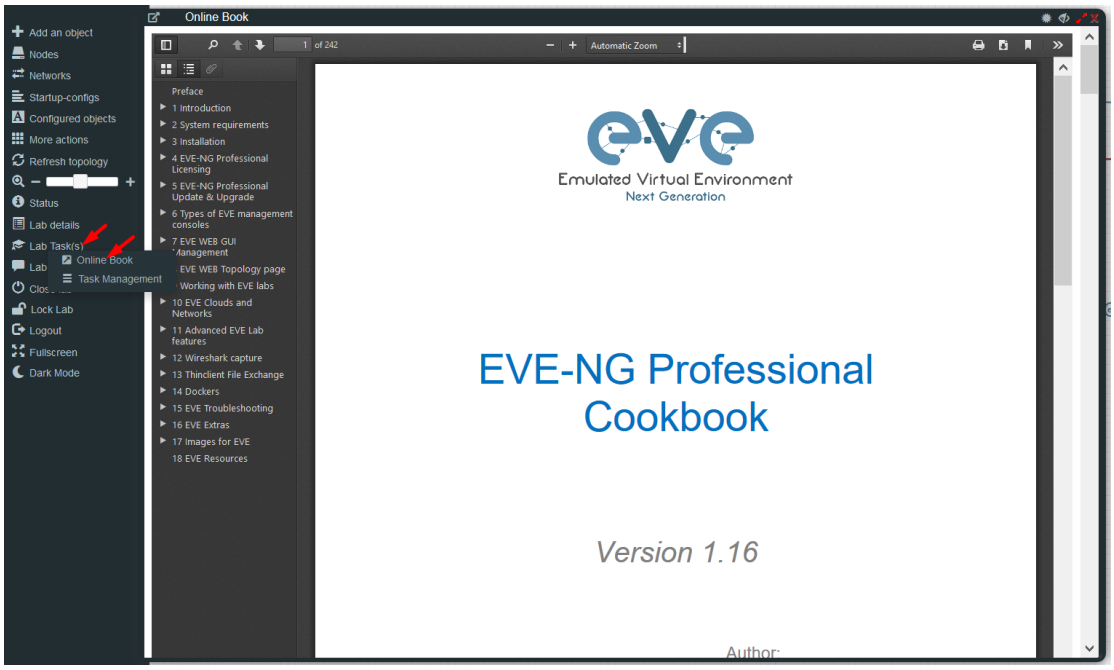


11.5.8 Delete a task

Step 1: From the Side bar click on “Task Management”:



Step 2. Click on the delete symbol next to the task name which you want to delete.

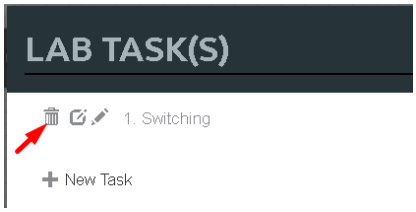

© EVE-NG LTD

12 Wireshark capture


All EVE-NG Professional and Learning Centre console types have the integrated Wireshark capture feature. This means that it is not necessary to have Wireshark installed on the client machine you are using to access EVE with.


EVE-NG Professional currently supports ethernet interface capturing only.

12.1 Native Console Wireshark capturing

Step 1: Right click on the node you wish to capture, choose “Capture” and then the relevant interface. The capture will open in an HTML session. EVE-PRO supports capture for ethernet and serial interfaces.
Select the interface frame type which will be captured:


- Ethernet for Ethernet, Fast Ethernet, Gigabit Ethernet.
- Serial interface frames: HDLC, PPP or Frame Relay.

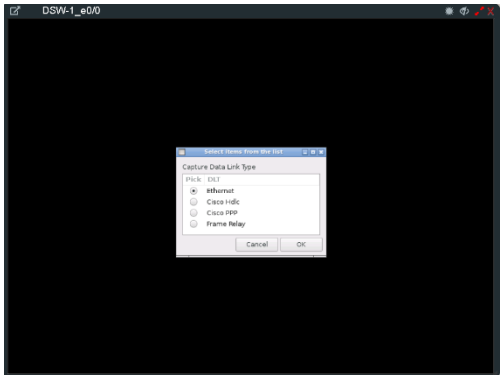


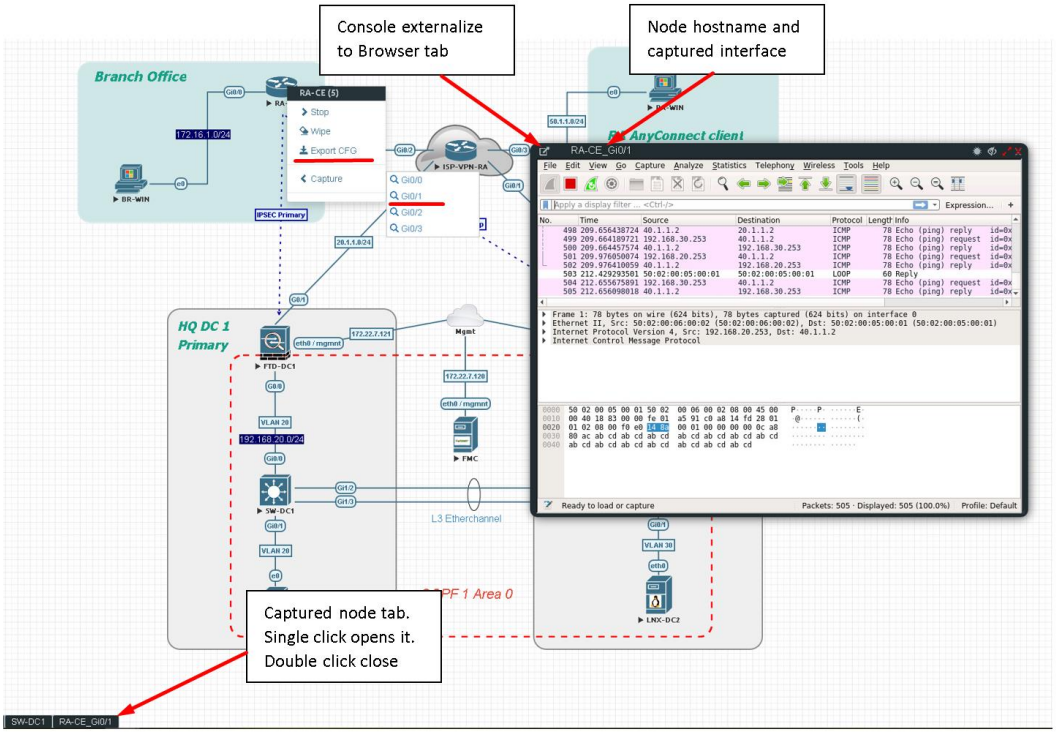

Step 2: To save the captured file to your client PC, stop the capture and choose File/Save As

© EVE-NG LTD

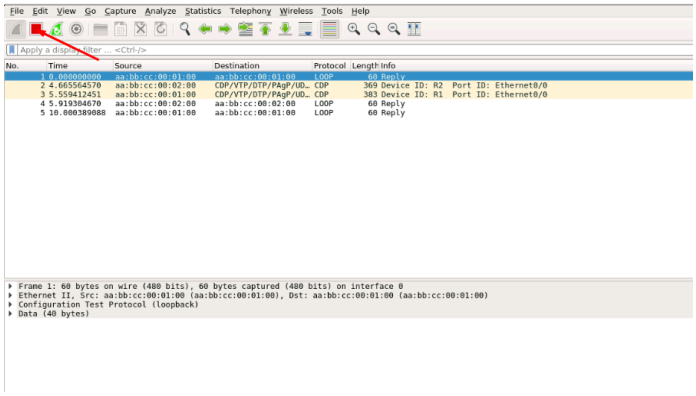

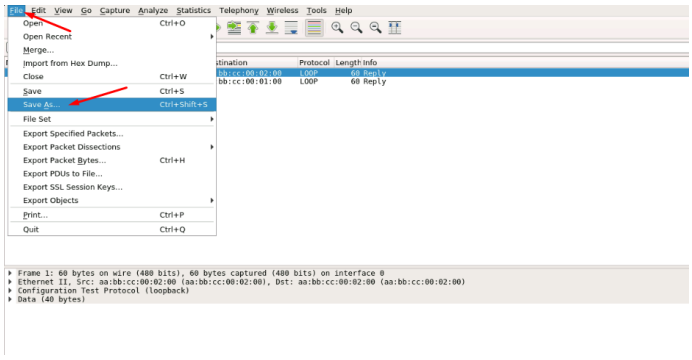

Step 3: Choose the location where you want to save the captured file

IMPORTANT:


/nobody/thinclient_drives/GUACFS/Download


Enter a name for your captured file and press Save. Your browser will offer to download your capture fil and save on your local PC. Refer Section 12.2

12.2 HTML5 Console Wireshark capturing


Step 1: Right click on the node you wish to capture, choose “Capture” and then the relevant interface. The capture will open in an HTML session. EVE-PRO supports capture for ethernet and serial interfaces.
Select the interface frame type which will be captured:


- Ethernet for Ethernet, Fast Ethernet, Gigabit Ethernet.
- Serial interface frames: HDLC, PPP or Frame Relay.

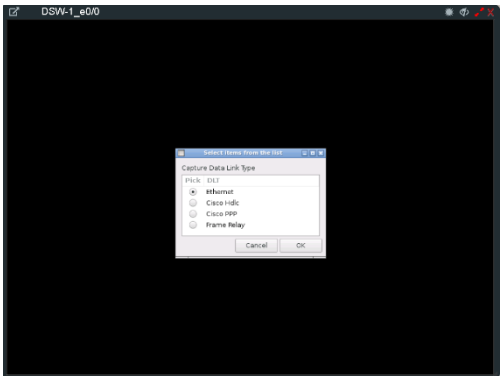

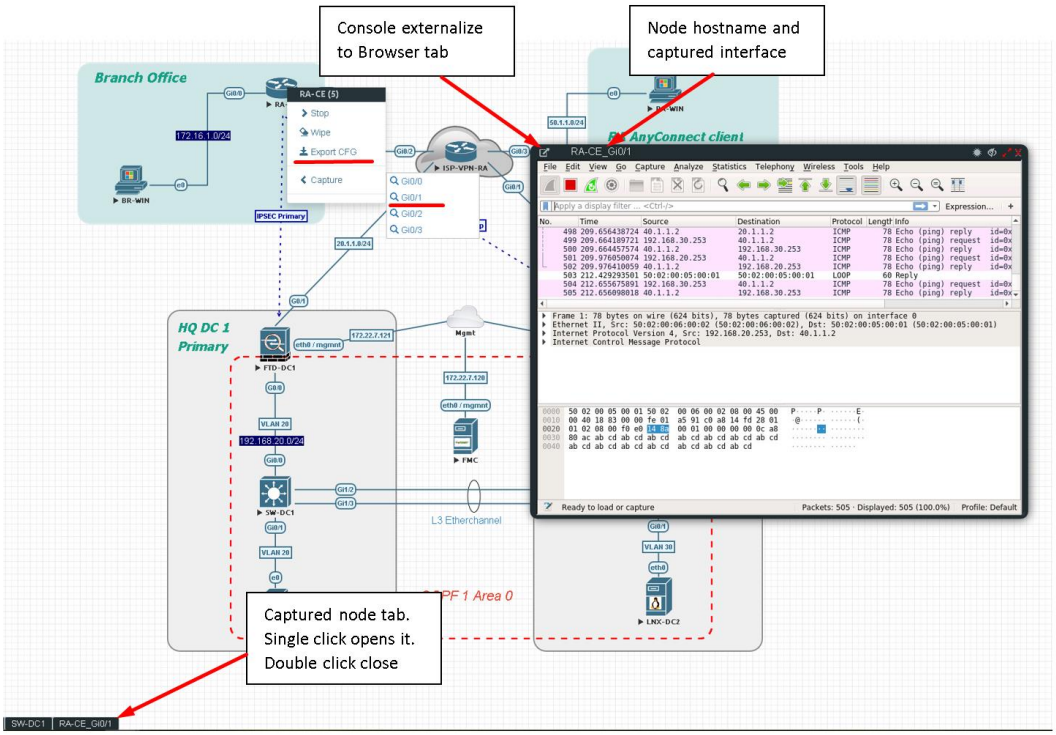

Step 2: To save the captured file to your PC, stop the capture and choose File/Save As

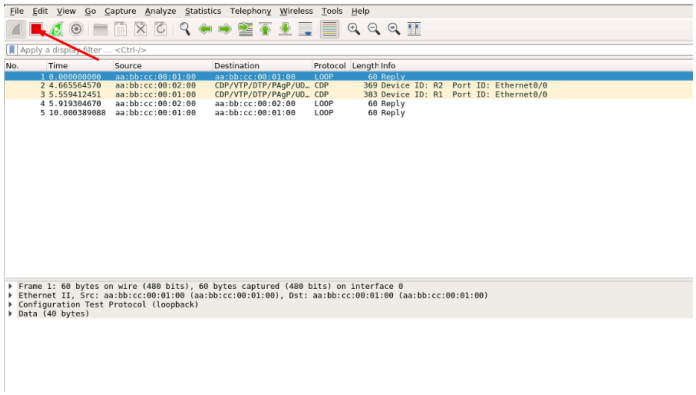

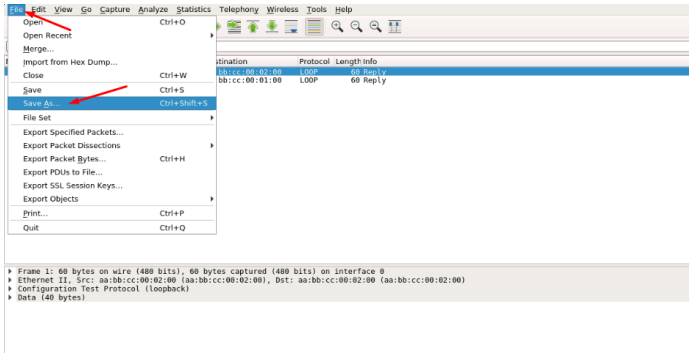


Step 3: Choose the location where you want to save the captured file


IMPORTANT:

/nobody/thinclient_drives/GUACFS/Download

Enter a name for you captured file and press Save.

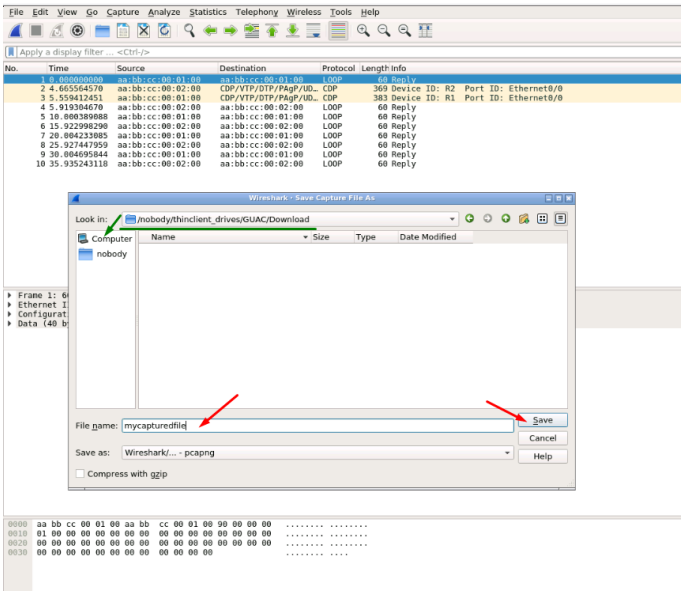

Step 4: A window will open that will allow you to save your captured file on your client PC. If the client PC's browser is set to download automatically, your captured file will be saved in the default browser download folder.

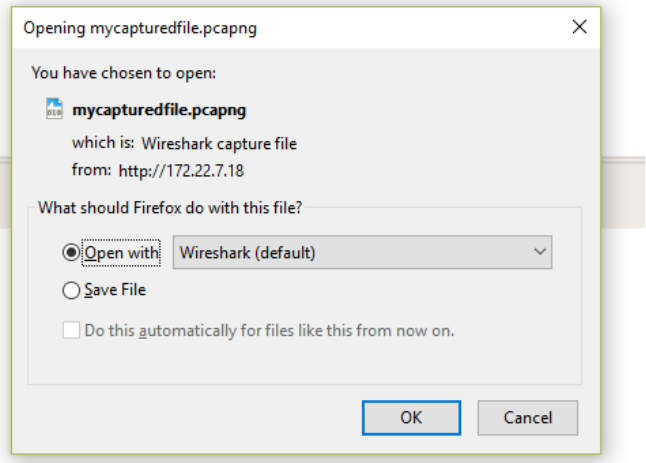



© EVE-NG LTD

12.3 HTML5 Desktop Console Wireshark capturing


Step 1: Right click on the node you wish to capture, choose “Capture” and then the relevant interface. The capture will open in an RDP session. EVE-PRO supports capture for ethernet and serial interfaces.
Select the interface frame type which will be captured:

- Ethernet for Ethernet, Fast Ethernet, Gigabit Ethernet.
- Serial interface frames: HDLC, PPP or Frame Relay.

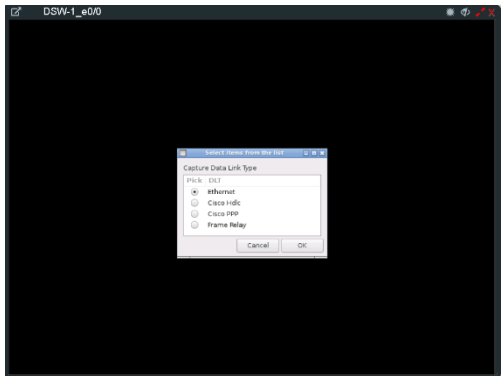


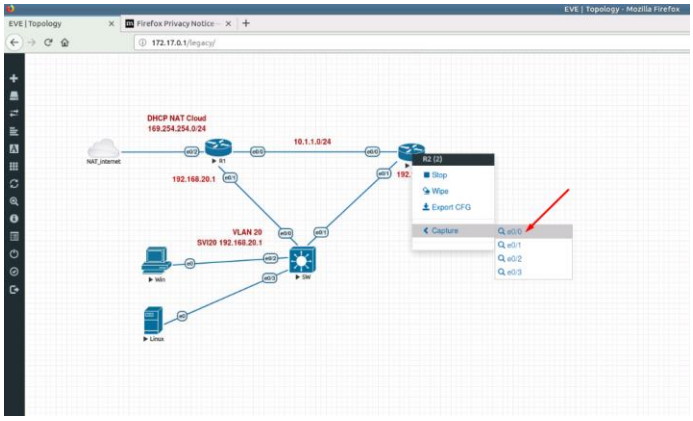

Step 2: Stop capturing with the STOP button.

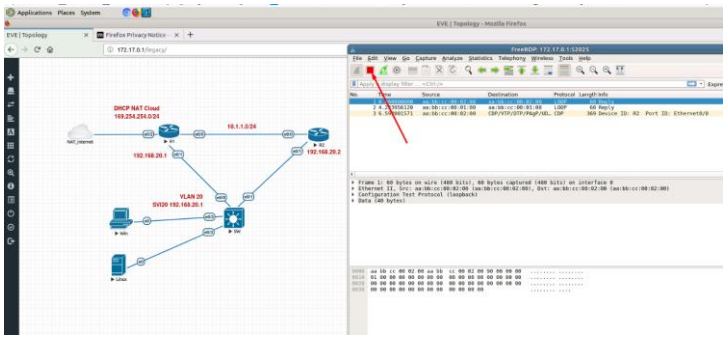

Step 3: Chose File/Save As

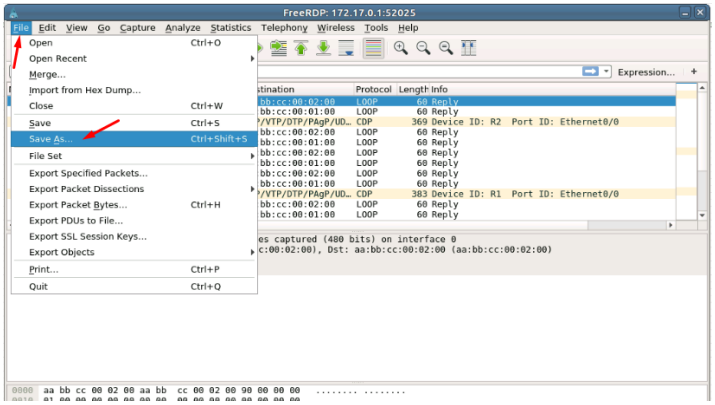


© EVE-NG LTD

Step 4: Chose the path to save the captured file,


IMPORTANT:

/nobody/thinclient_drives/media/nobody/thinclient_drives/GUACFS/Download/

Enter a name for captured file. Press Save.

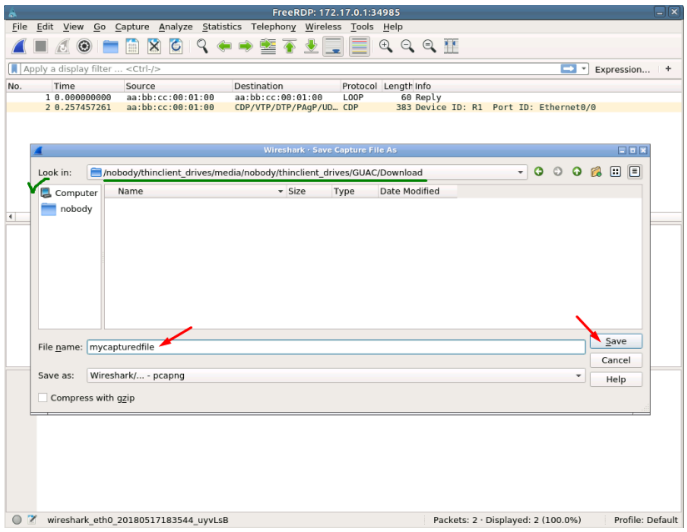

Step 4: A window will open that will allow you to save your captured file on your client PC. If the client PC's browser is set to download automatically, your captured file will be saved in the default browser download folder.

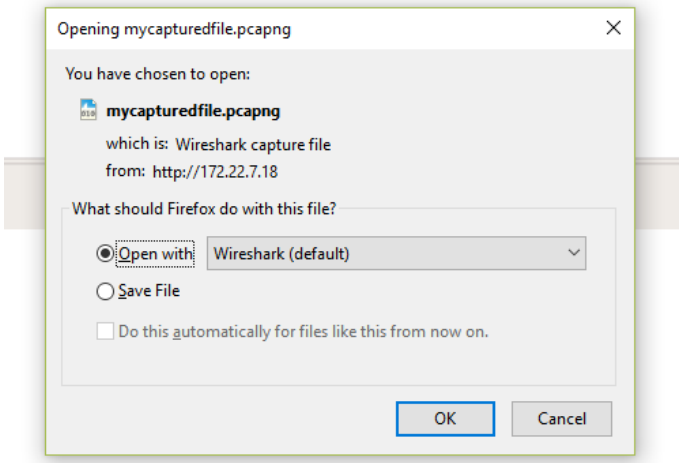

© EVE-NG LTD

13 Thinclient File Exchange

⚠ NOTE: Thinclient file exchange feature is available for HTML5 or desktop HTML5 consoles only. Make sure you are logged in EVE with one of it.


The Thinclient file exchange feature allows you to transfer files between your native client workstation and the integrated Docker Desktop. It is used when managing EVE via HTML5 consoles. This feature eliminates the need for file transfer software on your client workstation and makes it very easy to import/export labs or download Wireshark captures.

13.1 Thinclient files downloading

The Thinclient file exchange feature allows you to download files from your EVE Server over an HTTP/HTTPS session to your client PC. Examples below will show you how to download exported lab files. This feature is not restricted to just lab files or Wireshark captures. It can be used to download or upload any miscellaneous files you may need.

Example: HTML5 console to server-gui Docker node: We want to export our test.txt file and download it to our client PC over HTML5.


Step 1: Create and save test.txt file on your HTML5 server-gui station.

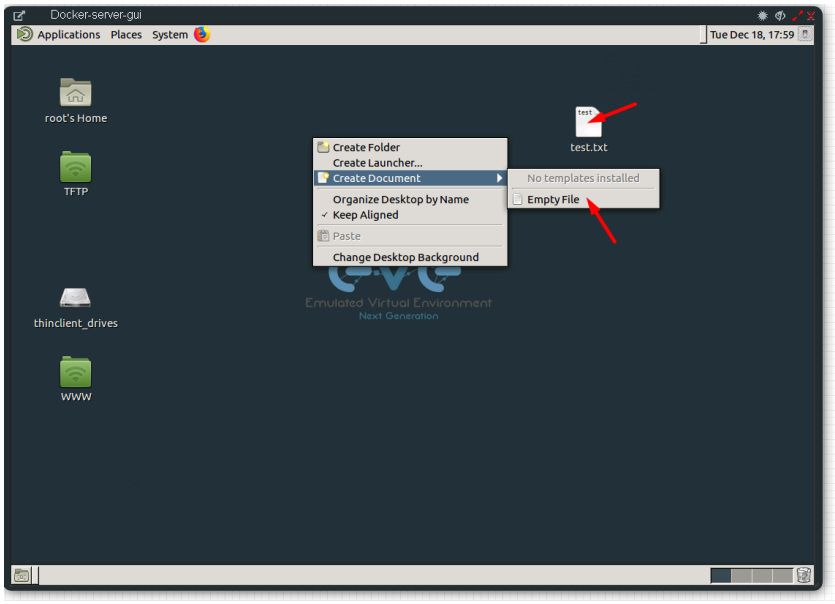


Step 2: Navigate to the desktop of the HTML5 server-gui station and double click **thinclient_drives** and navigate to: **thinclient_drives/GUACFS/Download/**

Step 3: Drag and drop the test.txt file from right to left.

© EVE-NG LTD

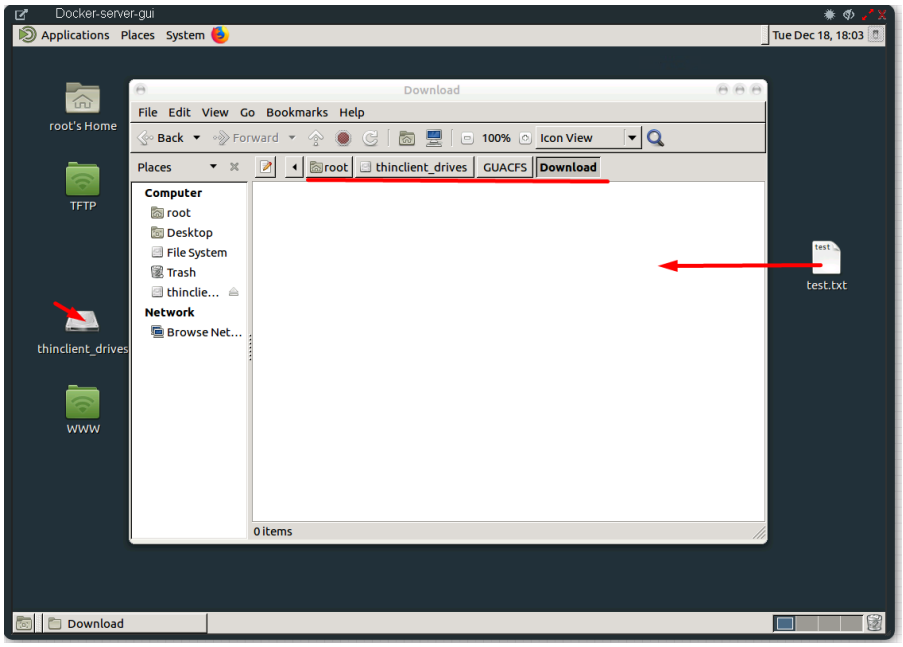

Step 4: A window will open that will allow you to save your captured file on your client PC. If the Native PC's browser is set to download automatically, your selected file will be saved in the browsers default download folder.

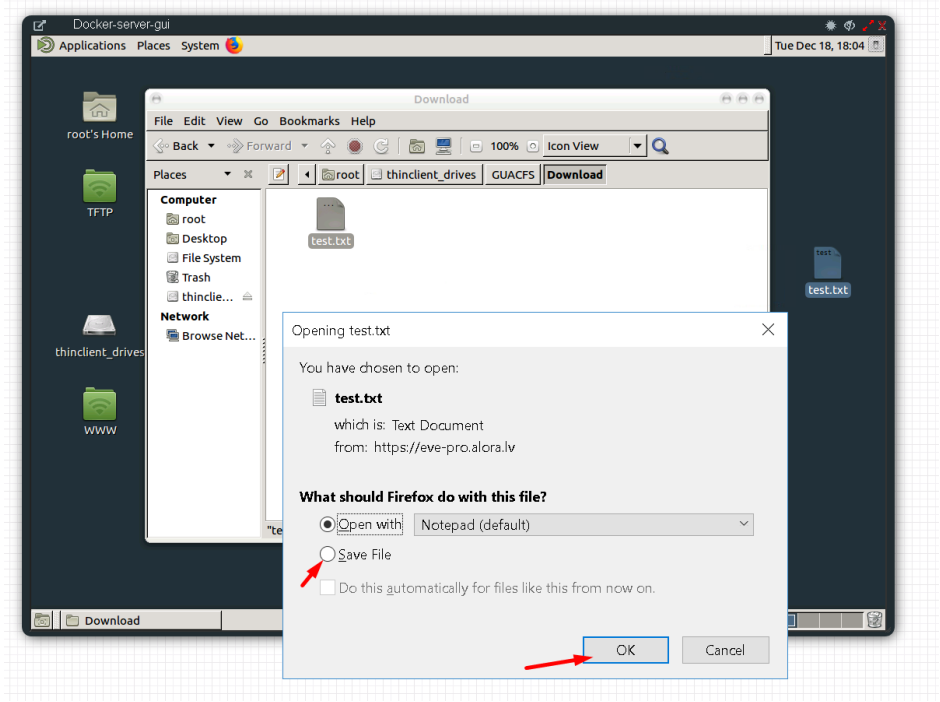

NOTE: Please refer to section 12 for downloading Wireshark capture files from EVE HTML5 consoles.


13.2 Thinclient File upload

Sometimes it is necessary to upload files to your EVE labs. The Thinclient file exchange feature allows you to upload files from your client PC to the EVE HTML5 server-gui station. The


© EVE-NG LTD

example below will show you how to upload a text file to the EVE HTML5 server-gui station. Any other files can be uploaded the same way.

Step 1: Adjust your browser so that you can see it and the file that you want to transfer.

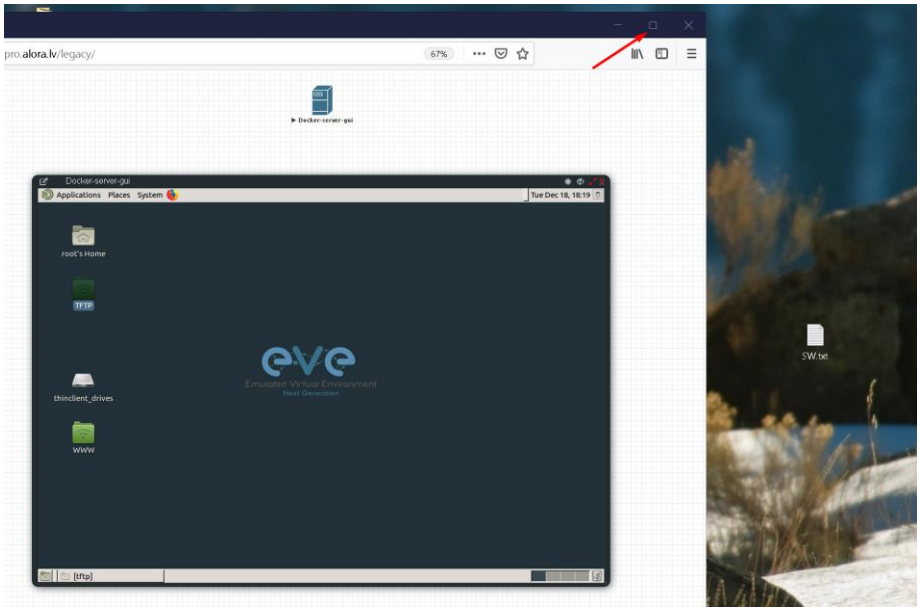


Step 2: On the EVE HTML5 Desktop navigate to: **thinclient_drives/GUACFS/** and drag and drop the file from your client PC to opened location on HTML5 Desktop.

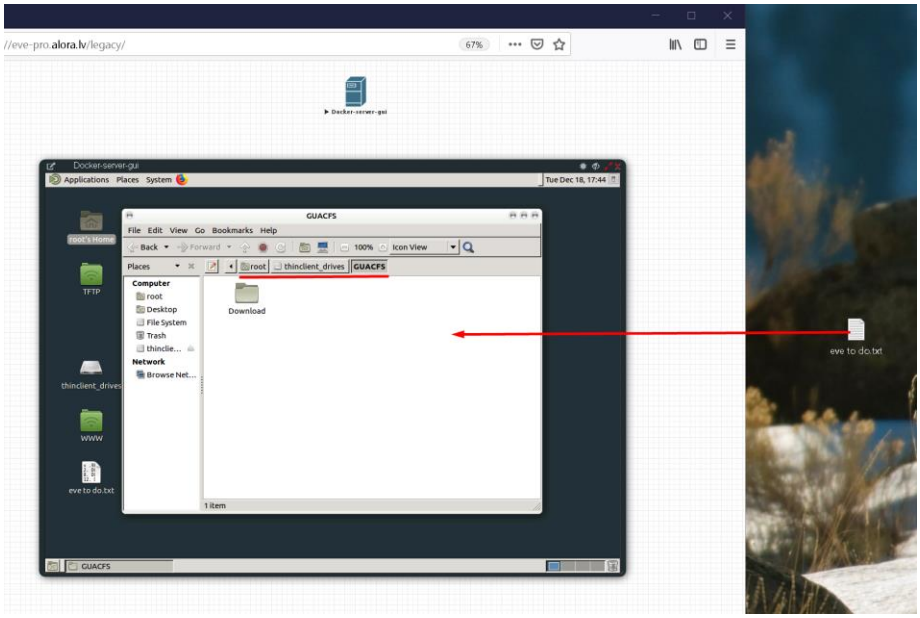


Step 3: Next you will see a notification in the bottom right corner.

© EVE-NG LTD

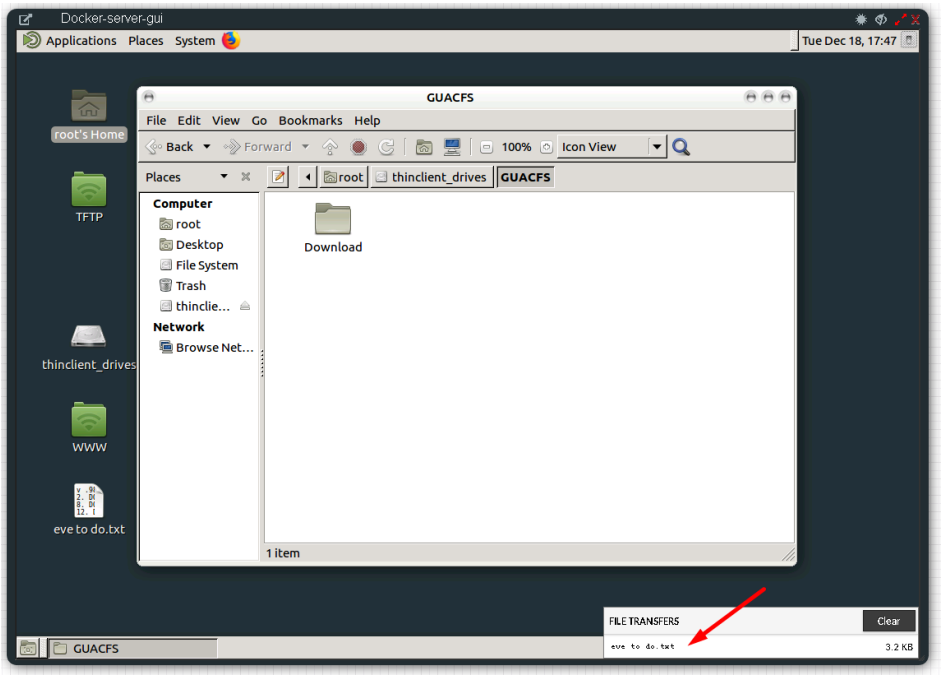

Step 4: To finish the operation and see the uploaded file in the HTML desktop station, press the refresh button. Our Text file SW.txt has been uploaded.

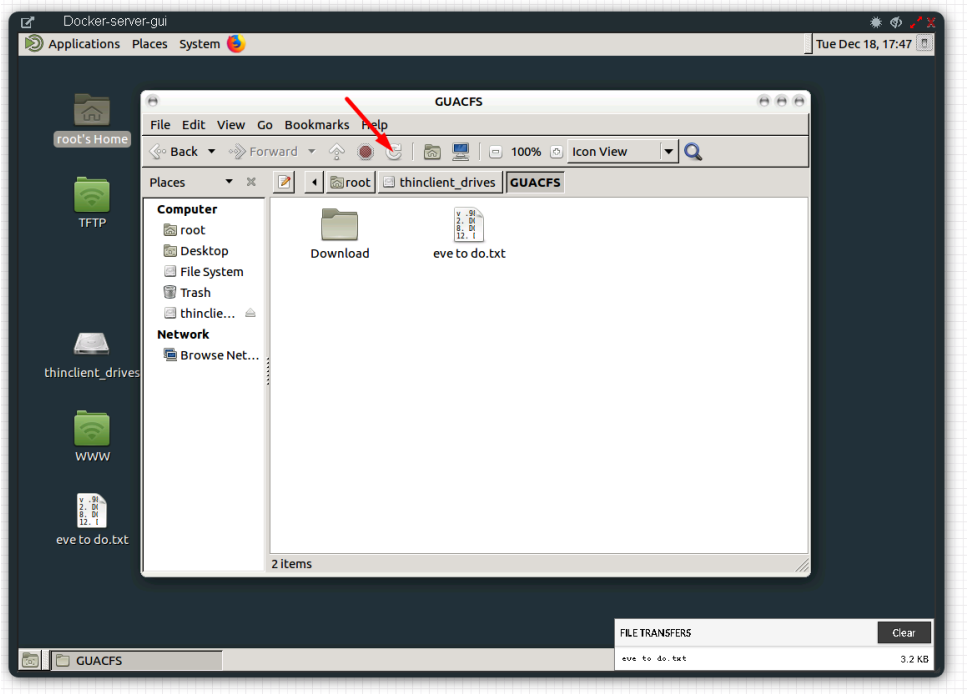


13.3 Other Thinclient file operations

Files that have been uploaded via the thinclient feature can also be transferred to nodes inside your EVE labs via TFTP. In the example below we have uploaded a config file (sw.txt) and would like to transfer it to node R1.


Step 1: Add the **eve-gui-server** docker node to your lab and edit its settings. Set the console type to RDP and configure the IP address settings (DHCP or static) accordingly so that the

© EVE-NG LTD

docker node can reach the destination node (R1 in this example). For Docker IP addressing please refer to section 14

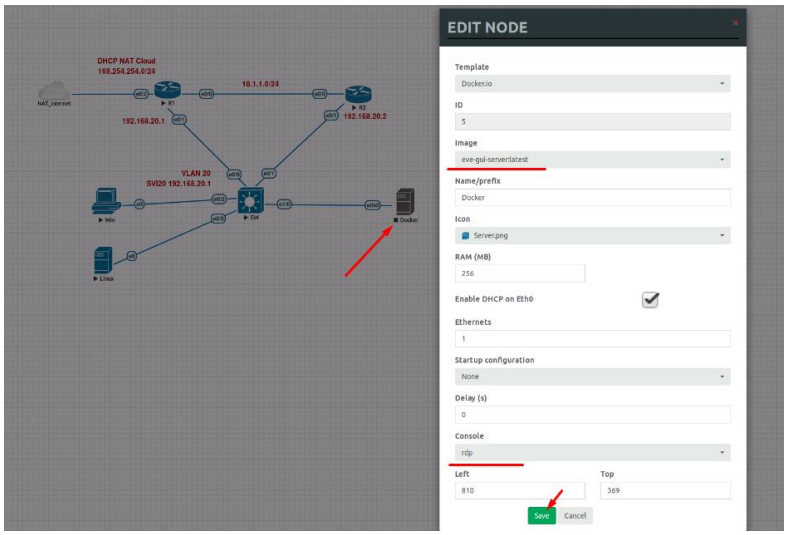

Step 2: Click on the **eve-gui-server** docker node to open an RDP session.

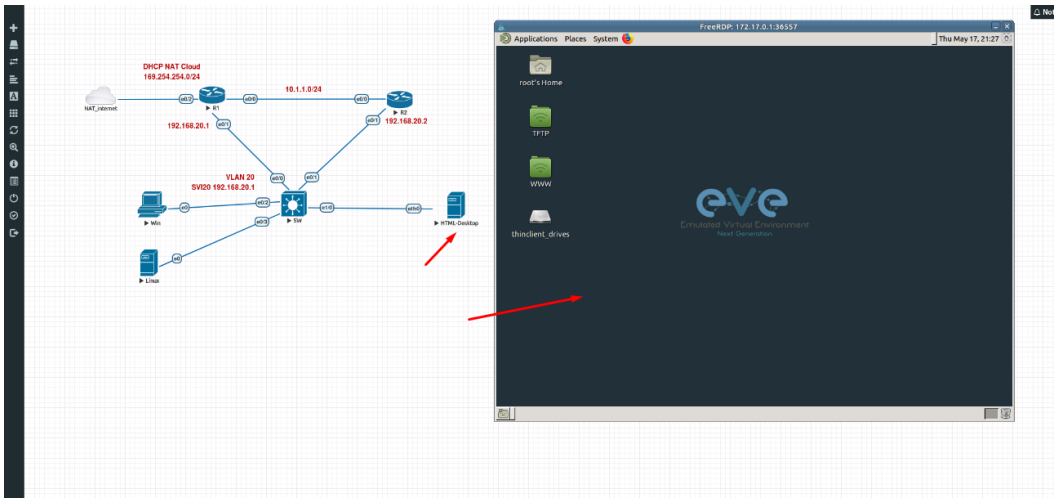



Step 3: Open the **thinclient_drives** location where you uploaded your file to:

/thinclient_drives/media/nobody/thinclient_drives/GUACFS/


Next, drag and drop your file to the desktop folder named TFTP.

© EVE-NG LTD

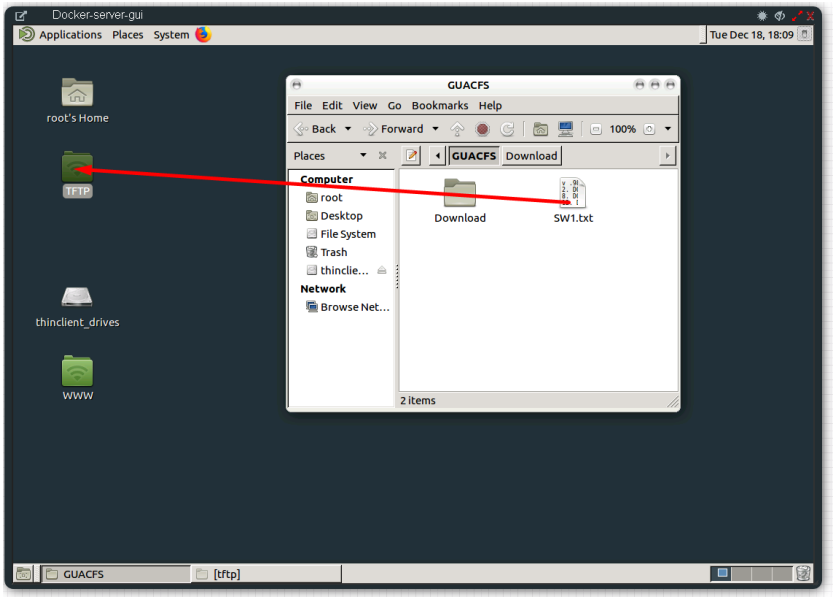

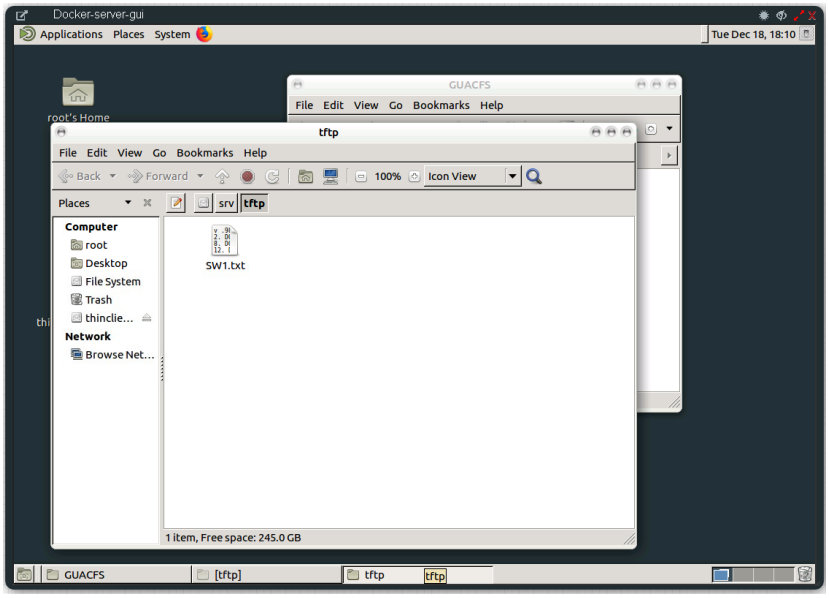

Step 4: Open the destination node's (R1) console and use the tftp command to copy your file:

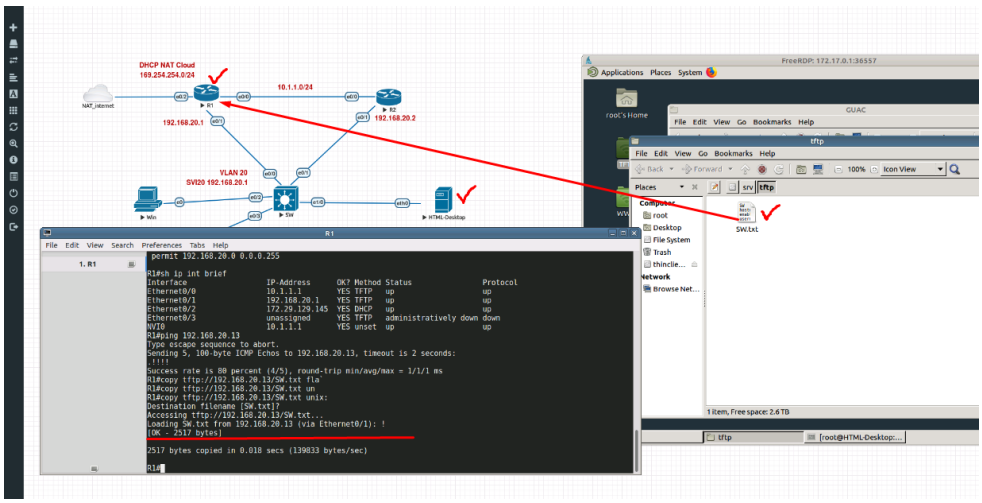

© EVE-NG LTD

14 Dockers

14.1 EVE integrated docker stations

EVE-NG Professional and Learning Centre edition have integrated Docker stations that allows your server to use its resources more efficiently. Dockers offer the advantage of not having to duplicate processes already running on the host system. With a Docker, you run only the processes you need for the hosted application. In comparison, virtual machines have to run a complete guest operating system, including many of the same processes that are already running on the server host.

⚠ IMPORTANT NOTE: EVE Docker stations for html console access are using network 172.17.0.0/16. Please avoid use this network on the EVE management or other clouds or interfaces.

14.1.1 Docker Machines

eve-gui-server (default)

- Fully featured Linux workstation with integrated Thinclient. For more information on the Thinclient operation please refer to section 13.
- napalm
- ansible
- python
- RDP console
- DHCP or Static IP address
- WWW Server (web page home directory www is located on desktop)
- TFTP Server (for access to TFTP server, root/eve or nobody/eve, home directory TFTP is located on desktop)
- FTP server (for access to FTP server, root/eve, home directory for ftp is root)
- Java Integration for ASDM access to Cisco ASA/IPS. For access to ASDM where Java is required, please follow this reference link:

  https://192.168.100.5/admin/public/asdm.jnlp


  Where 192.168.100.5 is the ASA IP for ASDM connection

  NOTE: Older ASA require to configure extra SSL encryption to communicate with Java on the docker station. ASA 9.1.5 CLI:

  ```
  ssl encryption aes256-sha1
  ```

Example: Access to ASAv ASDM from Docker server-gui station

© EVE-NG LTD

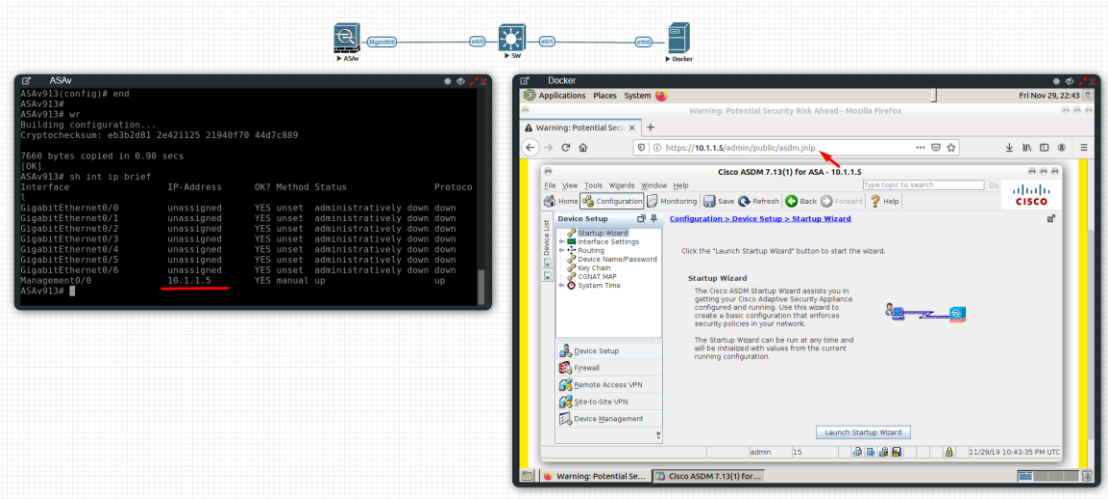

eve-firefox (default)

- A Docker for hosting a Mozilla Firefox browser. Useful for accessing another nodes management interface using http or https. The browser already has Java integrated so that you can utilize GUIs that require it, like ASDM for Cisco's ASA.
- RDP console
- DHCP or Static IP address

eve-wireshark (default)

- Fully featured Wireshark workstation with integrated Thinclient. For more information on the thinclient operation please refer to section 13.
- RDP console


eve-chrome (extra install, section 14.5)

- A Docker for hosting a Google Chrome browser. Useful for accessing another nodes management interface using http or https. The browser already has Java integrated so that you can utilize GUIs that require it, like ASDM for Cisco's ASA.
- DHCP or Static IP address

eve-kali-large (extra install, section 14.5)


- A Docker for hosting a Kali Linux. Fully featured Security vulnerability and penetration test machine
- DHCP or Static IP address
- Java Integration for ASDM access to Cisco ASA/IPS. For access to ASDM where Java is required, please follow this reference link:
- https://192.168.100.5/admin/public/asdm.jnlp
- Where 192.168.100.5 is the ASA IP for ASDM connection

© EVE-NG LTD

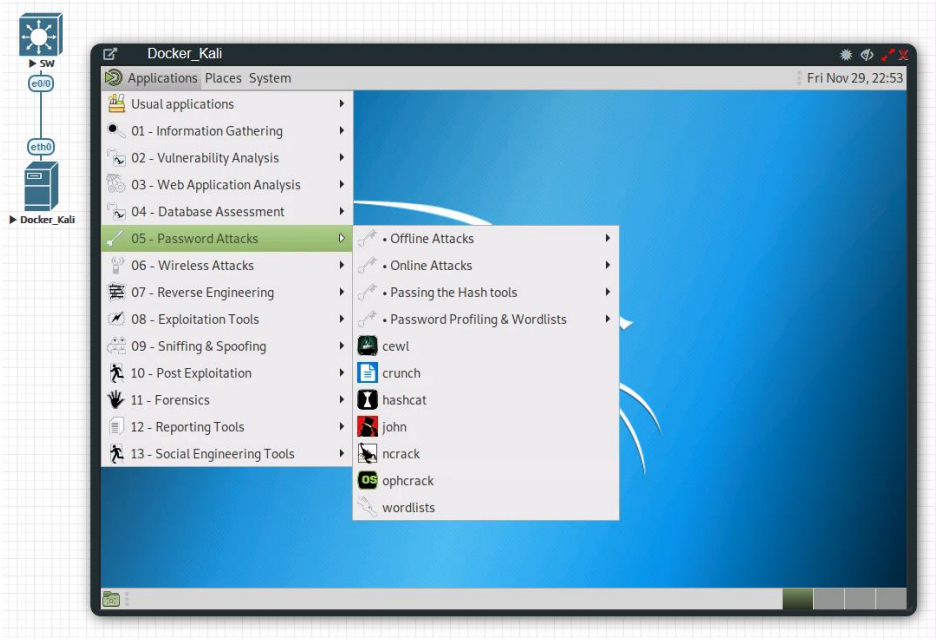

eve-ostinato (extra install, section 14.5)

- A Docker for hosting a Ostinato 0.9 GUI. Fully featured Ostinato 0.9 packet generator and network traffic generator machine
- DHCP or Static IP address
- Fully featured Ostinato GUI

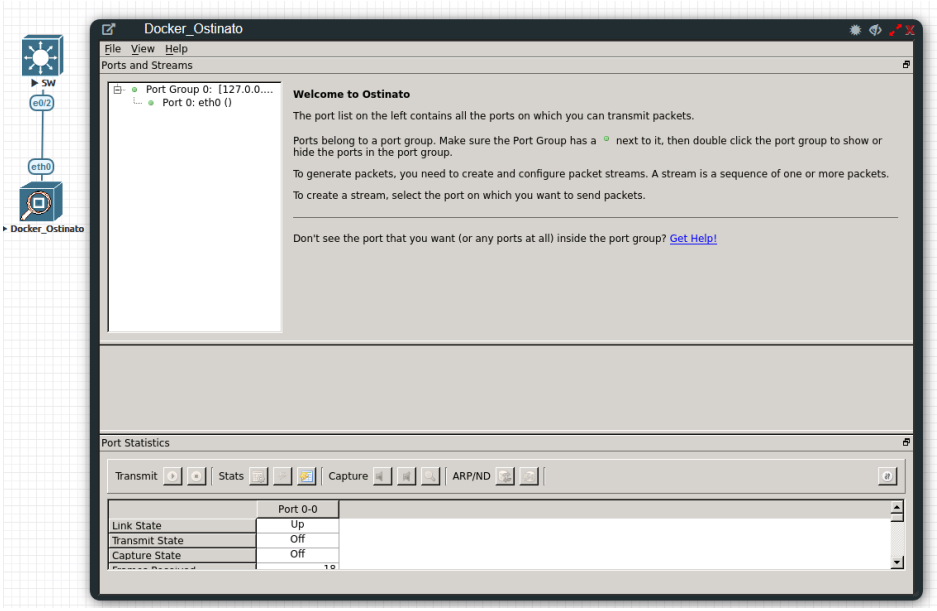

14.1.2 Docker DHCP IP address setup


EVE integrated Docker stations have two options for setting an IP address.

© EVE-NG LTD

DHCP IP address option.

Step 1: Add the node to the topology and make sure the DHCP option is **enabled** under the edit node window. Refer to section 14.2 for the correct console type.

Step 2: Ensure the docker's DHCP request can reach a DHCP server either in your lab or externally through a Cloud Network like Cloud0.

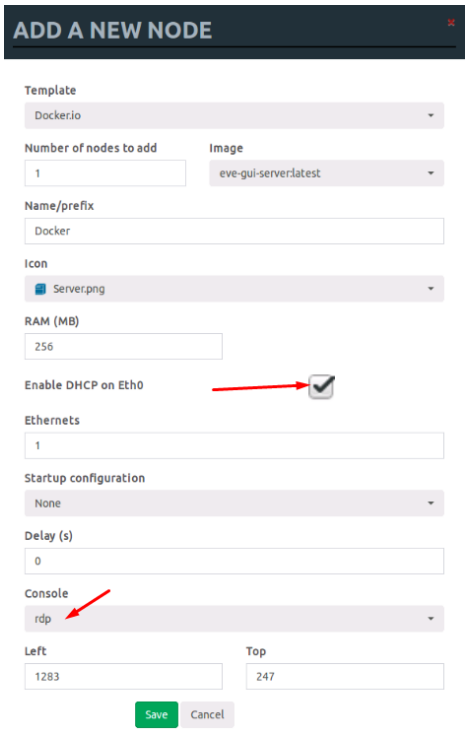

14.1.3 Docker Static IP and MAC address setup

Step 1: Add the node to the topology and make sure the DHCP option is **disabled** under the edit node window Reference section 14.2 for the correct console type.

Step 2: On the left sidebar menu open Startup-config and use the example syntax below to set the ip for your Docker node. Make sure you are using the exact syntax for your static IP setup:

```
# Set ip address and Default route
ip addr add 10.100.100.103/24 dev eth0 || true
ip route add default via 10.100.100.1 || true


# Set DNS server
cat > /etc/resolv.conf << EOF
nameserver 8.8.8.8
EOF
```

Step 2.1 (Optional): On the left sidebar menu open Startup-config and use the example syntax below to set the custom MAC for your Docker node. Make sure you are using the exact syntax for your static MAC setup:

```
# Set ip address and Default route
ip link set dev eth0 address XX:XX:XX:XX:XX:XX || true
ip addr add 10.100.100.103/24 dev eth0 || true
ip route add default via 10.100.100.1 || true

# Set DNS server
cat > /etc/resolv.conf << EOF
nameserver 8.8.8.8
EOF
```

© EVE-NG LTD

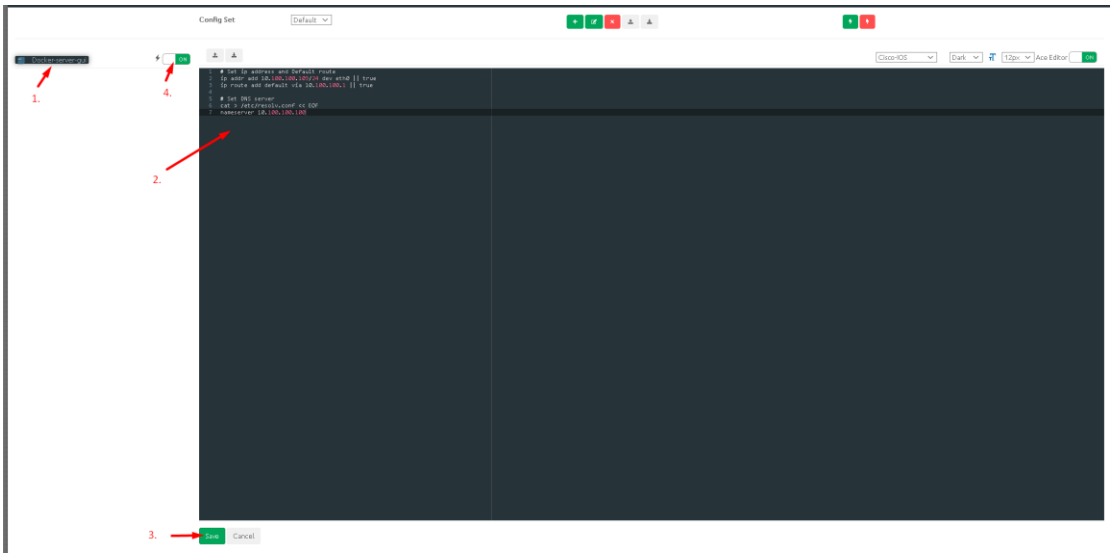

Step 3: Press the Save button below and switch the node to boot from the startup-config.

14.1.4 Docker multi interfaces setup

Step 1: Add the node to the topology and make sure the DHCP option is **disabled** under the edit node window Reference section 14.2 for the correct console type.

Step 2: On the left sidebar menu open Startup-config and use the example syntax below to set the ip for your Docker node. Make sure you are using the exact syntax for your static IP setup. It is recommended to add static routes under interfaces to reach specific networks if required.

```
# Set ip address eth0
ip addr add 192.168.1.200/24 dev eth0 || true
ip route add default via 192.168.1.1 || true


# Set ip address eth1
ip addr add 172.16.1.201/24 dev eth1 || true
# Set static route for eth1
ip route add 10.100.100.0/24 via 172.16.1.1 dev eth1 || true


# Set ip address eth2
ip addr add 10.1.1.10/24 dev eth2 || true
# Set static route for eth2
ip route add 10.10.10.0/24 via 10.1.1.1 dev eth2 || true


# Set DNS server
cat > /etc/resolv.conf << EOF
nameserver 8.8.8.8
EOF
```

© EVE-NG LTD

14.1.5 Docker server-gui custom WEB page

Step 1: Add the node to the topology and make sure the DHCP option is **disabled** under the edit node window Reference section 14.2 for the correct console type.

Step 2: On the left sidebar menu open Startup-config and use the example syntax below to set the ip and html page for your Docker node. Make sure you are using the exact syntax for your static IP setup and custom HTML values:

```
# Set ip address and Default route
ip addr add 10.100.12.100/24 dev eth0 || true
ip route add default via 10.100.12.10 || true

# Set DNS server
cat > /etc/resolv.conf << EOF
nameserver 8.8.8.8
EOF


# Create a Default web page
# Use 'EOF' do avoid variable from expanding

# Delete default index page
rm /var/www/html/index.html || true


# Create a Default web page
# Use 'EOF' do avoid variable from expanding
cat > /var/www/html/index.php << 'EOF'
<center>
<?php
echo gethostname();
?>
<hr>
<img     width="596"   height="239"     src="---
imagecode ommittedg==">
<hr>

<?php
//whether ip is from share internet
if (!empty($_SERVER['HTTP_CLIENT_IP']))
  {
    $ip_address = $_SERVER['HTTP_CLIENT_IP'];
  }
//whether ip is from proxy
elseif (!empty($_SERVER['HTTP_X_FORWARDED_FOR']))
  {
    $ip_address = $_SERVER['HTTP_X_FORWARDED_FOR'];
  }
//whether ip is from remote address
else
  {
    $ip_address = $_SERVER['REMOTE_ADDR'];
  }
echo 'Client Address:'.$ip_address;
?>
</center>
EOF
```

© EVE-NG LTD

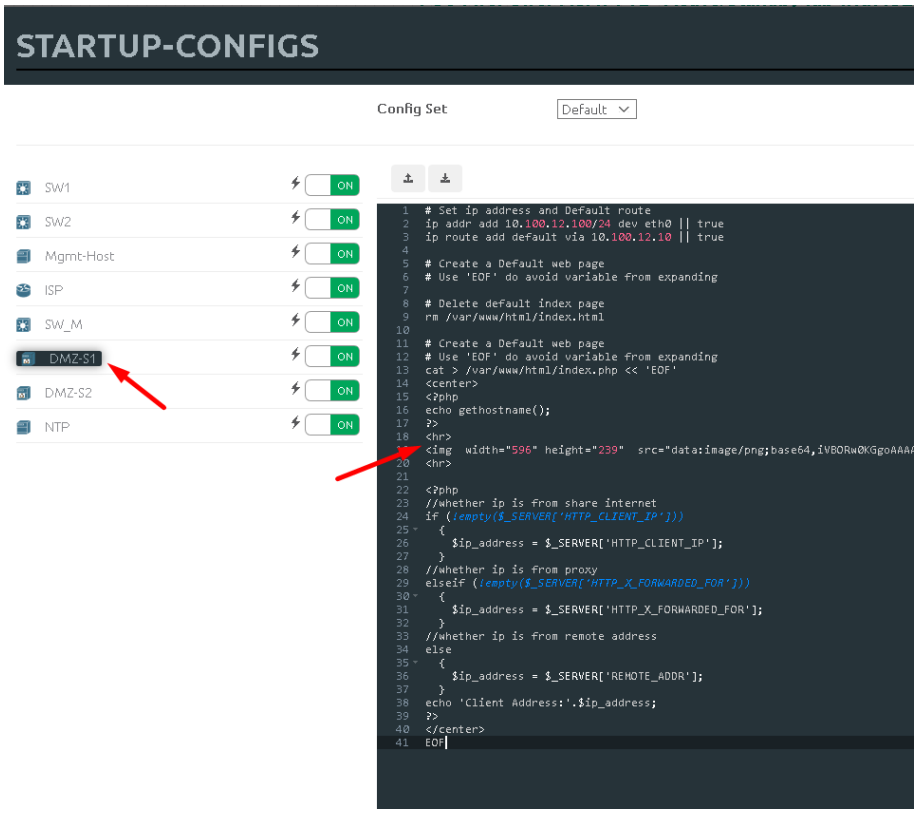

Step 3: Press the Save button below and switch the node to boot from the startup-config.

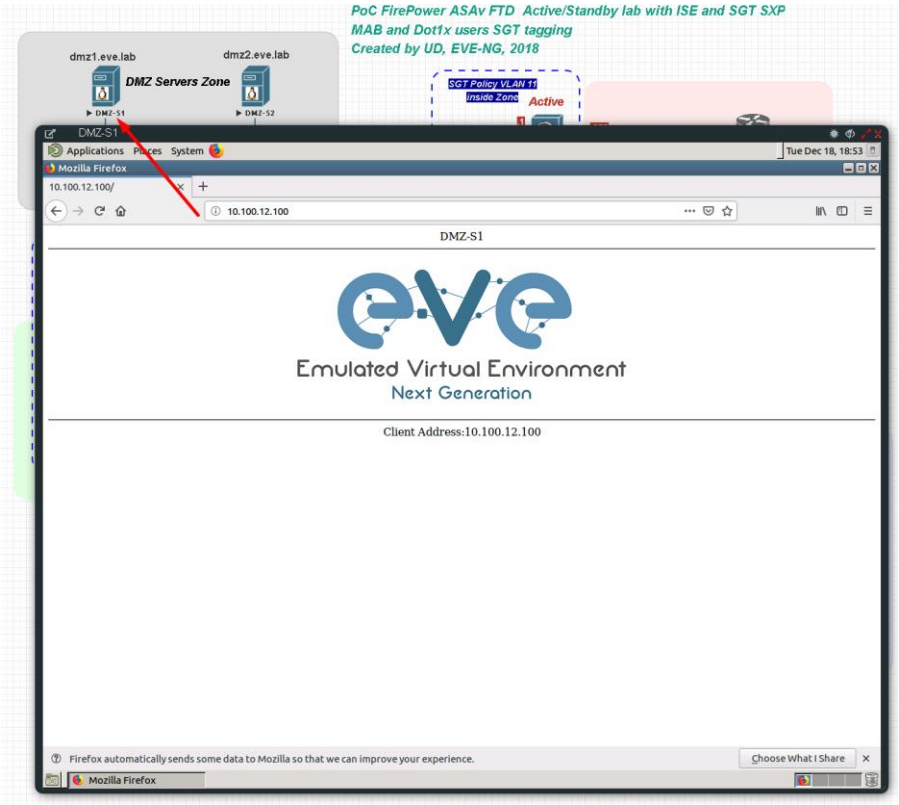


© EVE-NG LTD

14.1.6 Docker server-gui SSL WEB page

Following previous chapter, you can enable on the server-gui node SSL/HTTPS certificate.

Step 1: Open Applications/System Tools/MATE Terminal

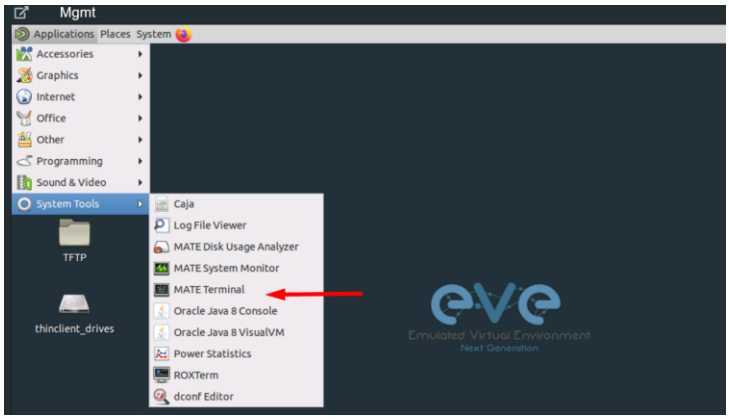

Step 2: Create SSL certificate, single line command, and fill up requested details.

```
openssl req -x509 -nodes -days 365 -newkey rsa:2048 -keyout
/etc/ssl/private/apache-selfsigned.key -out /etc/ssl/certs/apache-
selfsigned.crt
```

Step 3: Enable SSL certificate for web page.

```
/usr/sbin/a2enmod ssl

/usr/sbin/a2ensite default-ssl
```

Step 4: Restart apache2 service


```
sv stop apache2


sv start apache2
```

© EVE-NG LTD

14.2 Docker Consoles

To set consoles for EVE Docker stations, right click on node and click Edit. Set the required console type

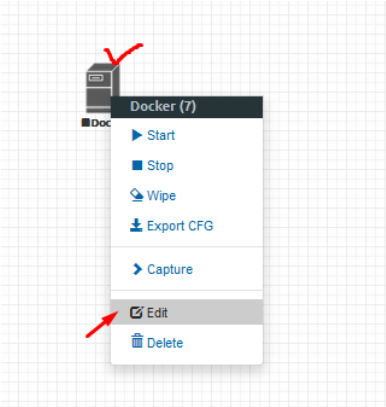

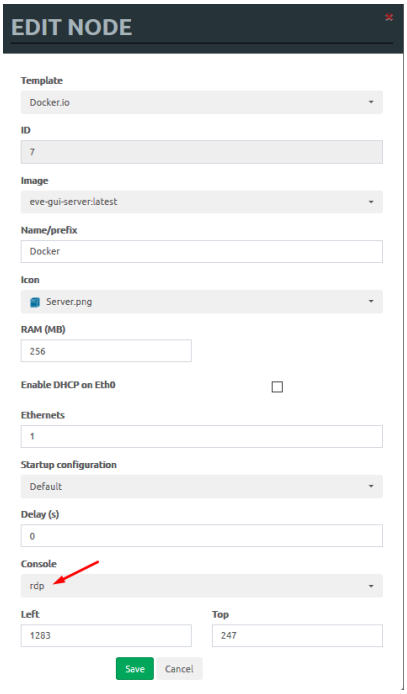

Docker Station	***Console type***
eve-gui-server (napalm, ansible)	RDP
eve-chrome (optional)	RDP
eve-wireshark	RDP
eve-firefox	RDP
eve-kali (optional)	RDP
eve-kali-large (optional)	RDP
eve-ostinato (optional)	RDP

14.3 Docker cli root access

All EVE docker stations have the following configured CLI root account.

Username: root

© EVE-NG LTD

Password: eve

⚠ NOTE: The root login for SSH can be commented in sshd file. Use vi to edit and remove comment "#" for PermitRootLogin

```
vi /etc/ssh/sshd_config
PermitRootLogin yes
```

Regular user (root user) SSH access to EVE Docker:

Username: nobody

Password: eve

14.4 Dockers re-install/update

To install or fix docker stations in the EVE Pro issue the following commands from the CLI of EVE.
When dockers are properly installed, your EVE CLI command `dc images` output must show:

```
root@eve-ng:~# dc images
REPOSITORY          TAG                 IMAGE ID            CREATED             SIZE
eve-desktop         latest              ca1333621bd7        12 hours ago        3.65GB
eve-gui-server      latest              9db19c879a17        2 days ago          3.84GB
eve-firefox         latest              0266d108a1bb        7 weeks ago         2.12GB
eve-wireshark       latest              82a009773e89        7 weeks ago         1.56GB
root@eve-ng:~#
```

If you still see some docker line with <none>

```
root@eve-ng:~# dc images
REPOSITORY                  TAG                 IMAGE ID            CREATED             SIZE
<none>                      <none>              cc286e6ac274        16 seconds ago      1.87GB
eve-gui-server              latest              f3aa6e0e9a56        3 minutes ago       3.04GB
eve-wireshark               latest              638ed7cf5b80        12 minutes ago      887MB
eve-firefox                 latest              259293d73b07        13 minutes ago      1.49GB
eve-desktop                 latest              78e9c2e618a5        15 minutes ago      2.79GB
```

please use reinstall dockers command:

```
apt install --reinstall eve-ng-dockers
```

Reference for Dockers reinstall and upgrade: http://www.eve-ng.net/documentation/eve-ng-upgrade

14.5 Extra docker packages

NOTE: Not included in the default EVE Pro installation. This can take some time depending on your Internet connection and disk speed.

Kali Linux Full, to install issue command:

```
apt update
apt install eve-ng-kali-large
```

Chromium Linux http, to install issue CLI command:

```
apt update
```

© EVE-NG LTD

```
apt install eve-ng-chrome
```

Ostinato docker, to install issue CLI command:

```
apt update
apt install eve-ng-ostinato
```

Docker-in-docker (DinD) docker. This docker is dedicated for complex docker stacks. Refer section: **14.6.2**. To install issue CLI command:

```
apt update
apt install eve-ng-dind
```

To verify Installed dockers, issue CLI command

```
dc images
root@eve-ng:~# dc images
REPOSITORY          TAG                 IMAGE ID            CREATED             SIZE
eve-dind            latest              6e067b53b145        3 days ago          747MB
eve-gui-server      latest              0c764bb836f9        2 months ago        3.69GB
eve-kali-large      latest              6982b7fa25e1        2 months ago        11.8GB
eve-wireshark       latest              413aae02d43d        4 months ago        1.62GB
eve-firefox         latest              8882ac260c1f        4 months ago        2.15GB
eve-ostinato        latest              63497fd2da4d        4 months ago        1.79GB
eve-desktop         latest              b041a187ded9        4 months ago        3GB
dockergui-rdp       latest              be03f3b46439        4 months ago        1.29GB
root@eve-ng:~#
```

14.6 Third parties dockers

Starting EVE-NG Pro version 2.0.6-52, the third party dockers can be installed on the EVE. However, some limitation still exists. You are free to evaluate by yourself if a specific one is working.
Two main categories of dockers require each a specific method for EVE integration:

- Simple Docker
- Docker's Stack

14.6.1 Simple docker installation

Simple docker is the classic docker running in a standalone mode. You could find large choice of docker images on https://hub.docker.com or create the Docker by yourself.

Complete guide about dockers can be found on https://docs.docker.com/

Note: Internet access is a must. For simple docker, you only have to use:

```
dc pull <dockername>
```

Note: "dc" is EVE-NG alias for docker -H tcp://127.0.0.1:4243 which simplify docker operations in the EVE.

Once your new docker is pulled, you are able to use it in EVE-NG topologies. EVE-NG will start it using correct parameters automatically.


Example: SSH to your EVE. Install adosztal AAA docker:


```
root@eve-ng:~# dc pull adosztal/aaa
```

© EVE-NG LTD

```
root@eve-ng:~# dc images
REPOSITORY          TAG                 IMAGE ID            CREATED             SIZE
eve-dind            latest              6e067b53b145        3 days ago          747MB
adosztal/aaa        latest              862d42a1c8f5        8 weeks ago         311MB
eve-gui-server      latest              0c764bb836f9        2 months ago        3.69GB
eve-kali-large      latest              6982b7fa25e1        2 months ago        11.8GB
eve-wireshark       latest              413aae02d43d        4 months ago        1.62GB
eve-firefox         latest              8882ac260c1f        4 months ago        2.15GB
eve-ostinato        latest              63497fd2da4d        4 months ago        1.79GB
eve-desktop         latest              b041a187ded9        4 months ago        3GB
dockergui-rdp       latest              be03f3b46439        4 months ago        1.29GB
root@eve-ng:~#
```

New docker use: Open a new lab, add docker and select adosztal/aaa with console in tenet mode.

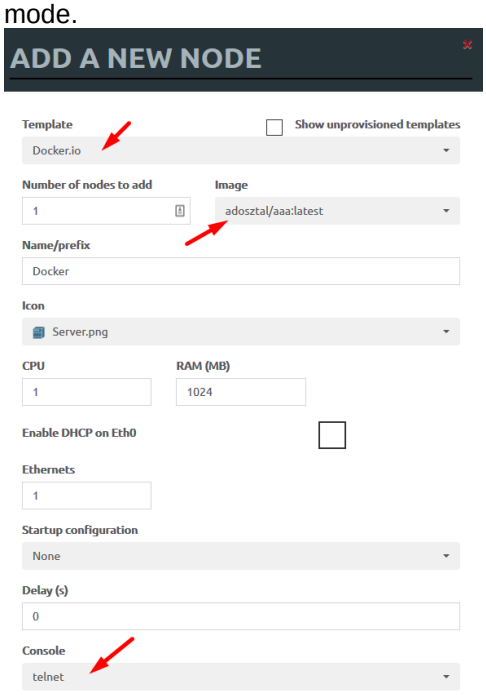

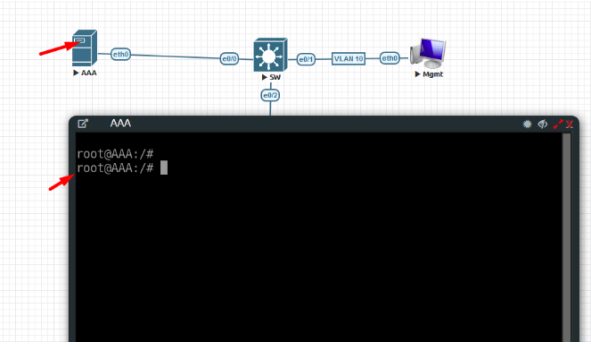

14.6.2 Docker stack installation

Docker's Stack is a complex structure of multi intercommunicating dockers. For example, a Web service docker is using another Database Docker service.

To avoid involve EVE host internal process and network, the new add-on docker is provided: "eve-dind". This add-on is a dedicated docker container allowing to build complex stack. The classic method is based on docker-compose.

The example below illustrates how to build complex docker LibreNMS, Network Management System.

Note: Internet access is a must. SSH to your EVE as root.

Sample:
Step 1: On eve cli, type:

```
apt update
apt install eve-ng-dind
```

Note: install eve-ng-dind add-on docker and is required only once.

© EVE-NG LTD

Step 2: Create a new lab

Step 3: Add on the lab:
a. NAT network
b. Docker eve-dind (set console to 'telnet' and enable dhcp)

Step 4: Connect docker to NAT network

Step 5: Start Docker

Step 6: Open Docker Console

Step 7: Type in console:

```
git clone https://github.com/librenms/docker.git librenms-src

cp -r  librenms-src/examples/compose librenms

rm -fr librenms-src

cd librenms


docker-compose up -d
```

Commit your created docker with new name.

Step 8: Open a cli access to your EVE server

Step 9: Type within the EVE cli:
Find your current running container ID using eve-dind image

```
dc ps -a
```

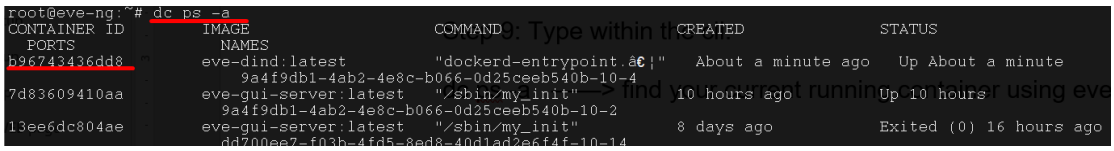


Step 10: *IMPORTANT:* On the Lab UI stop docker. Do not wipe, but stop.
Step 11: Commit your created docker with custom name.

```
dc commit <containerid> eve-librenms
```

Step 12: On LAB UI: Stop all nodes, Close Lab, Delete Lab

Note, when you add newly created docker in lab, use vendor advised settings, x4 CPU and 8GB Ram for librenms docker. Console: Telnet. Graphic Interface https.


© EVE-NG LTD

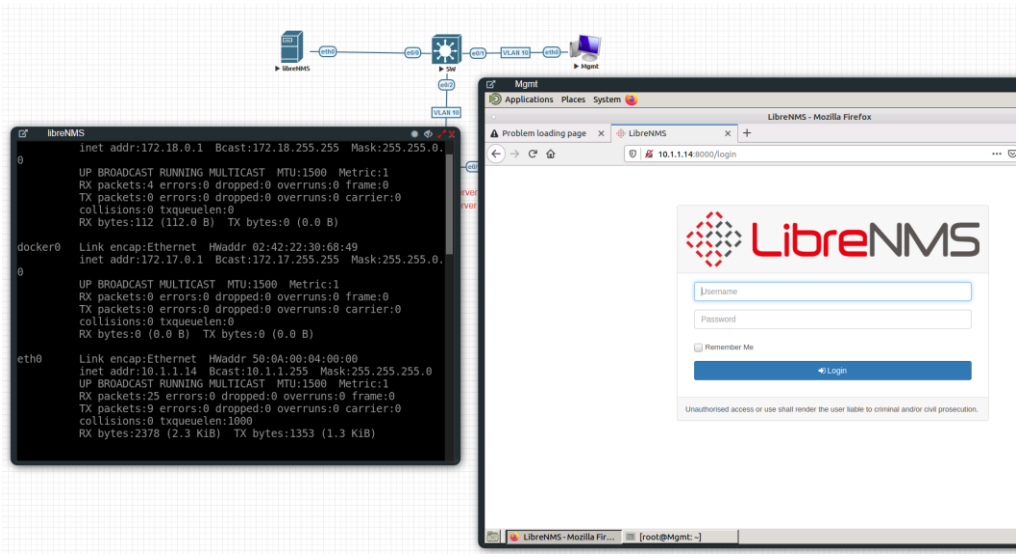

14.7 Customize docker image with your own changes.

Step 1. Connect your existing docker node to the internet

Sometimes you may have your own packages to be installed on the docker and kept for future labs. For this connect your docker to the Internet. It can be achieved connecting docker to Management Cloud0 or NAT cloud. **Example below**, Sever-gui docker is connected to Cloud NAT.

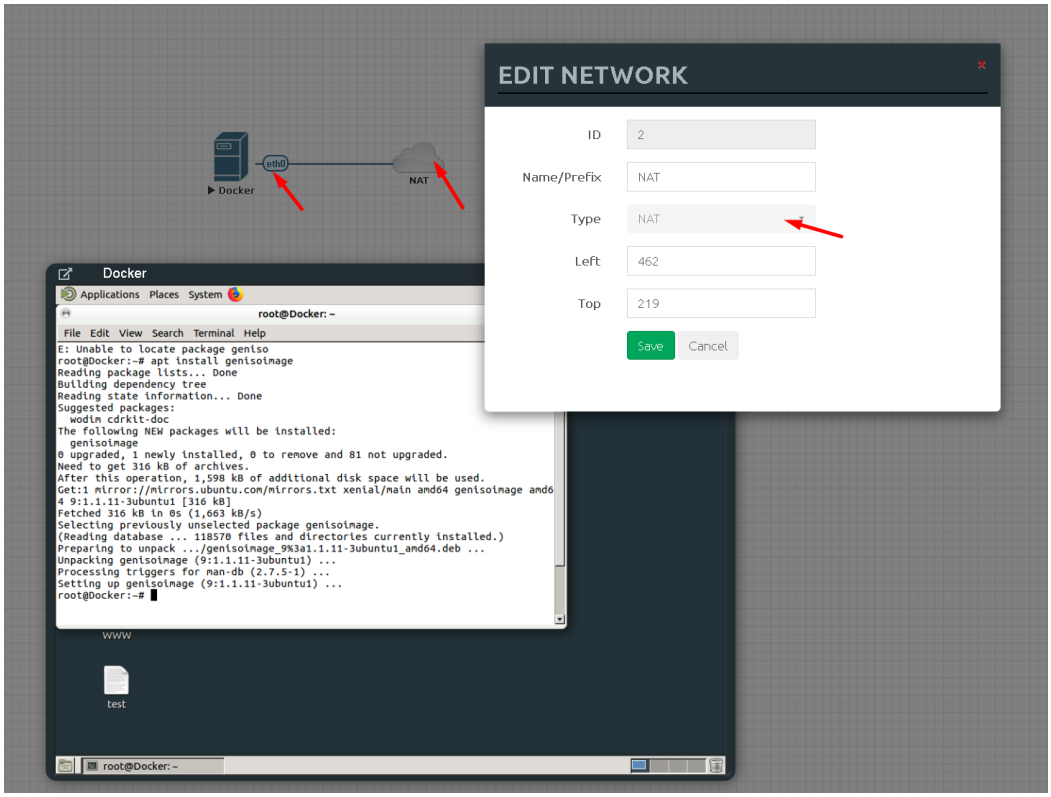

Step 2. Make your installs, packages. Example:

In the screen above I did install `genisoimage` package

```
apt install genisoimage
```

Step 3. Obtain your RUNNING docker container ID:

From EVE CLI issue command:

```
dc ps
```

```
root@eve-ng:~# dc ps
CONTAINER ID        IMAGE                    COMMAND             CREATED             STATUS              PORTS
 NAMES
0d4b3f8c314c        eve-gui-server:latest    "/sbin/my_init"     33 hours ago        Up 2 minutes
 b37bf9cb-0c6f-4bcb-b838-10d877ecce78-10-5
root@eve-ng:~# ^C
root@eve-ng:~#
```

Step 4. Commit your prepared docker image with new name. example below I called it eve-geniso

dc container commit <containerid> <newimagename>

```
dc container commit 0d4b3f8c314c eve-geniso
```

Step 5 check if new Docker image is created

```
dc images
```

```
root@eve-ng:~# dc images
REPOSITORY          TAG                 IMAGE ID            CREATED             SIZE
eve-geniso          latest              e6dd56c3b26c        4 seconds ago       3.19GB
eve-kali            latest              d1fda568e8a0        3 weeks ago         4.77GB
eve-nso             latest              f2a7a3d6a423        8 weeks ago         3.95GB
eve-ostinato        latest              e89cad6b1813        2 months ago        1.34GB
eve-gui-server      latest              a13cb401c8dd        3 months ago        3.11GB
eve-firefox         latest              8900664e9f3b        4 months ago        1.49GB
eve-chrome          latest              51fd92216b99        4 months ago        1.61GB
eve-wireshark       latest              0c49fe2dc6bb        7 months ago        888MB
eve-desktop         latest              c285d1ec833c        7 months ago        2.39GB
dockergui-rdp       latest              a65b62fa69b6        9 months ago        553MB
phusion/baseimage   0.9.22              877509368a8d        2 years ago         225MB
root@eve-ng:~#
```

Step 6. Optional, If you want to keep this image and later load in other EVE installs, then you must create exportable .tar image.

```
dc image save -o /root/mysuperimage.tar <image name>
```

Step 7 Optional, upload your .tar file in new EVE root, and install it in Dockers location.

```
dc image load -i /root/mysuperimage.tar
```

14.8 Delete docker image from EVE

Step 1. From EVE CLI issue command to check docker ID to be removed.

```
dc images
```

```
root@eve-ng:~# dc images
REPOSITORY          TAG                 IMAGE ID            CREATED             SIZE
eve-geniso          latest              e6dd56c3b26c        4 seconds ago       3.19GB
eve-kali            latest              d1fda568e8a0        3 weeks ago         4.77GB
eve-nso             latest              f2a7a3d6a423        8 weeks ago         3.95GB
eve-ostinato        latest              e89cad6b1813        2 months ago        1.34GB
eve-gui-server      latest              a13cb401c8dd        3 months ago        3.11GB
eve-firefox         latest              8900664e9f3b        4 months ago        1.49GB
```

© EVE-NG LTD

Step 2. Use command: dc rmi -f <id of docker image>.

```
dc rmi -f e6dd56c3b26c
```

Step 3. Check with **dc images** if docker is removed.

Step 4. Finish removal with **apt remove --purge eve-ng-kali**, where eve-ng-kali is your docker repository name.

© EVE-NG LTD

15 EVE Cluster System

The EVE-NG cluster refers to a group of EVE-NG nodes working together as a single entity to provide users with better scalability and availability.

The EVE-NG cluster model is designed to work as a one + many systems, the EVE-NG management server is acting as "Master" node, EVE-NG installations as "Satellite" can be members of this cluster.

One "Master" EVE-NG can have several satellites joined into its cluster but each satellite can only be joined to one Cluster/Master.


Any existing EVE-NG Pro installation is already a EVE-NG "Master", cluster members will need to be installed as "satellite" and can then easily be joined.

15.1 EVE Cluster design models

15.1.1 Bare metal servers cluster

Design 1 EVE-NG Cluster Bare HW servers, recommended


EVE Cluster 208 vCPU, 896GB RAM, 16TB SSD. Cluster members can be different HW configuration. The 1GB LAN connection or better is required

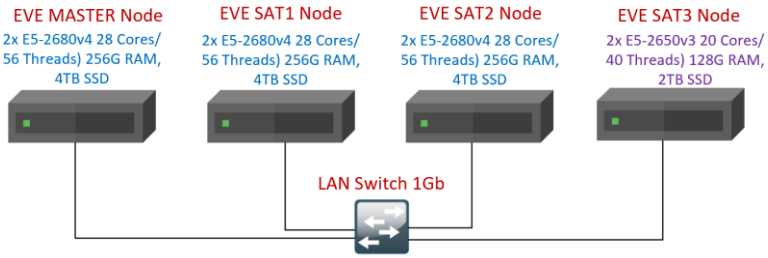

15.1.2 ESXi Virtual Machines cluster

Design 2 EVE-NG Cluster VM Ware ESXi Virtual Machines

EVE Virtual ESXi Cluster 112 vCPU, 384GB RAM, 8TB SSD. Cluster members can be different VM configuration and located on same or different ESXi servers

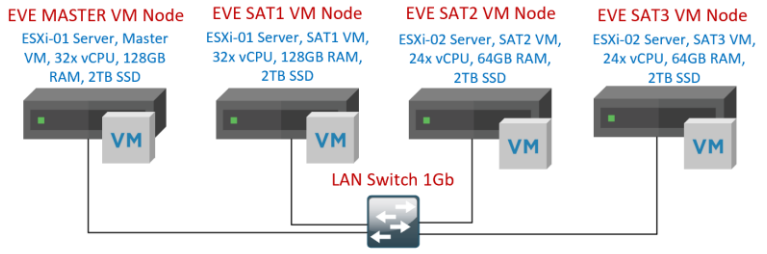


© EVE-NG LTD

15.1.3 Hybrid cluster

Design 3 Hybrid EVE-NG Cluster Bare metal and VM Ware ESXi Virtual Machines


EVE Hybrid Bare HW and ESXi Cluster 120 vCPU, 384GB RAM, 6TB SSD. Cluster members can be different VM configuration and located on same or different ESXi servers

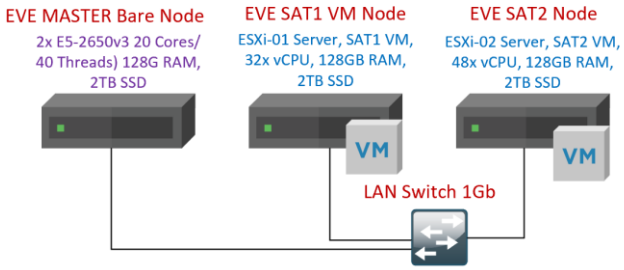

15.1.4 VM Ware workstation light cluster

Design 4 Light EVE-NG Cluster Desktop PCs and Wifi Laptop with VM Ware workstation and Virtual Machines


Light EVE Cluster with Desktop PCs and Laptop Wifi.

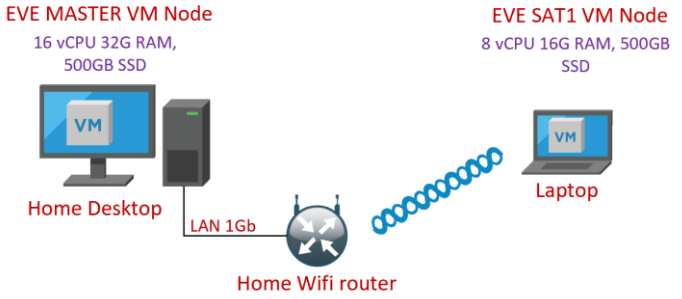

15.1.5 Google Cloud cluster

Design 5 EVE-NG Cluster Desktop PCs VM Ware workstation VM and Google Cloud VMs

High speed internet is required

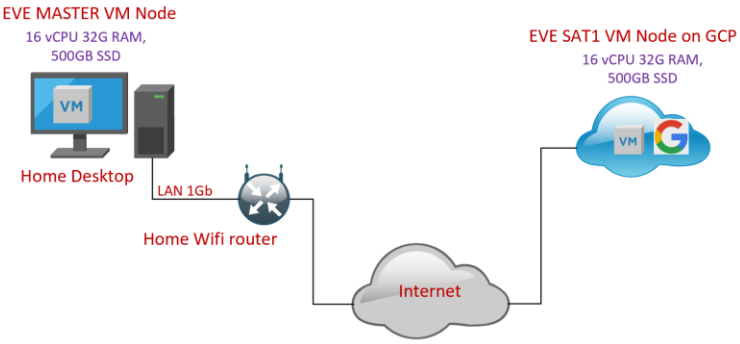

© EVE-NG LTD

15.2 EVE Cluster pre-requisites

15.2.1 Firewall rules between Master and Satellite nodes

Node	Protocol	Port	Direction	Source	Destination
MASTER	TCP	22	ingress and egress	MASTER node IP	SATELLITE nodes IPs
MASTER	UDP	all	ingress and egress	MASTER node IP	SATELLITE nodes IPs
SATELLITE	TCP	22	ingress and egress	SATELLITE node IP	MASTER Node IP
SATELLITE	UDP	all	ingress and egress	SATELLITE node IP	MASTER Node IP

15.2.2 EVE Cluster internal management network

An EVE Cluster for internal management is using network 172.29.130.0/24. Please avoid use it in your network

15.2.3 EVE Cluster Member's hardware requirements

Any suitable Hardware or virtual device. Please refer Chapter 2

15.3 EVE Cluster MASTER Node Installation

⚠ Mandatory Prerequisites: Internet must be reachable and DNS must resolve from your EVE Server. EVE ISO installation requires internet access and DNS to get updates and install the latest EVE-PRO version from the EVE-NG repository, to check it, do a named ping, for example ping www.google.com






Any existing EVE-NG Pro installation is already a EVE-NG "Master", cluster members will need to be installed as "Satellite" and can then easily be joined. Please refer Chapter 3

15.4 ESXi EVE Satellite VM installation


Download EVE-NG Professional ISO distribution image:
https://www.eve-ng.net/index.php/download/

© EVE-NG LTD


15.4.1 EVE-NG Satellite ESXi VM Setup and Settings

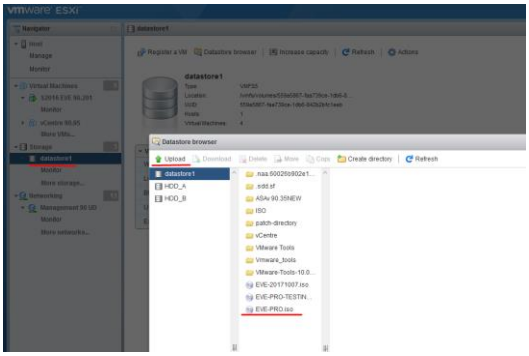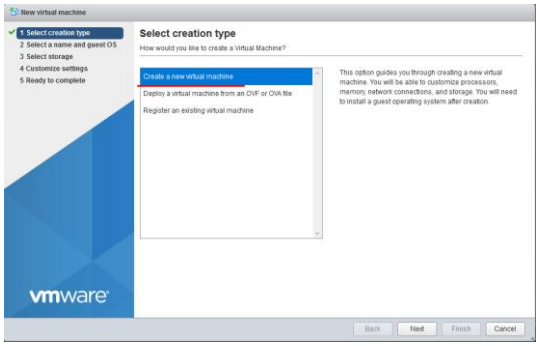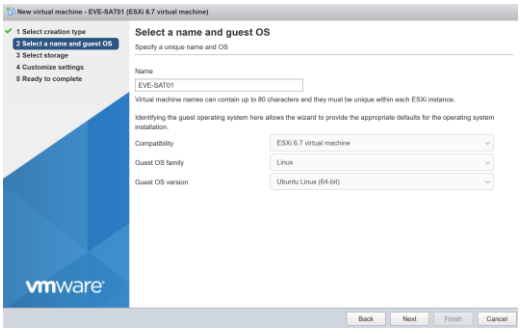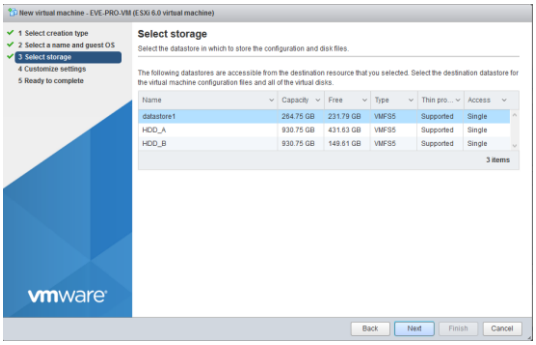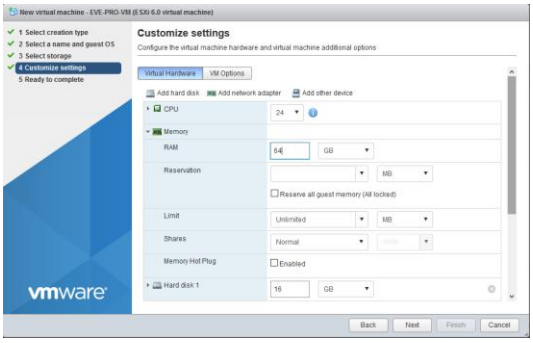Step 1: Upload EVE ISO image to the ESXi store. 	Step 2: Create NEW VM 
Step 3: Enter the name for your EVE-SAT01 VM and select Guest Operating system Linux and version: Ubuntu 64-bit 	Step 4: Select Location where your EVE VM will be stored in HDD. 
Step 5: IMPORTANT Customize your EVE VM CPU Settings. Set CPU Number of Cores and number of cores per processor. Set Intel VT-x/EPT Virtualization to ON (checked).	Step 6: Assig desirable RAM for your EVE Satellite 


© EVE-NG LTD

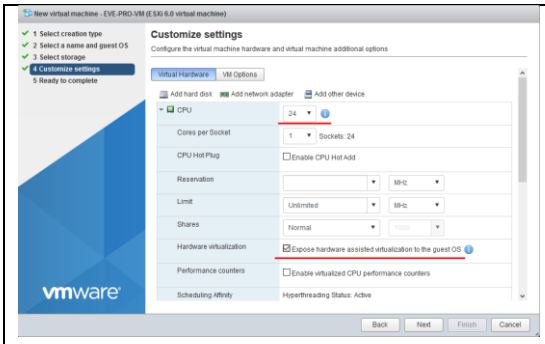


Step 7: Set the size of HDD for your new EVE Satellite VM. It is recommended to set “Thick Provisioned eagerly provisioned”. Server EVE HDD is recommended to set at least 500Gb

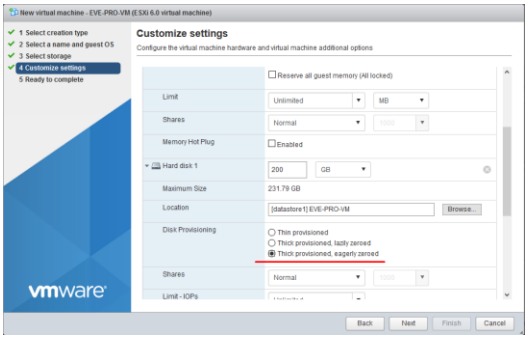


Step 8: Set your Management network. Adapter type VMXNET3

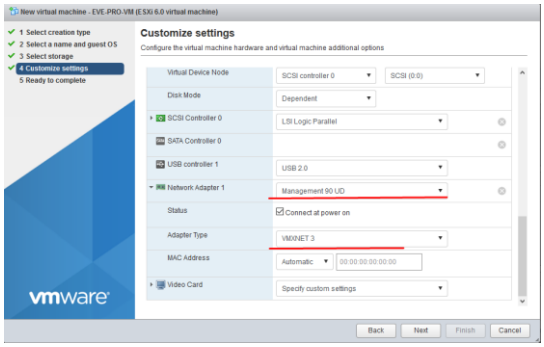

Step 9: Add new device to your EVE VM, CD/DVD

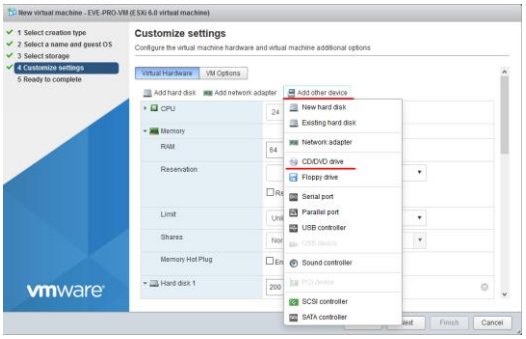

Step 10: Set DVD drive to “Datastore ISO File” and browse your uploaded EVE-PRO.iso. Make sure that Status is checked ON, “Connect at power on”

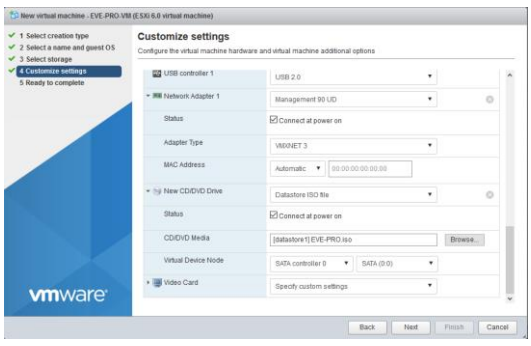




15.4.2 EVE-NG Satellite ESXi VM Installation steps

⚠ Mandatory Prerequisites: Internet must be reachable from your PC and VMware. EVE ISO installation requires internet access to get updates and install the latest EVE-PRO version from the EVE-NG repository. DNS must work as well, to check it, do a named ping, for example ping www.google.com

Satellite EVE ESXi VM Installation from ISO has 3 Phases

Phase 1 (Ubuntu installation)

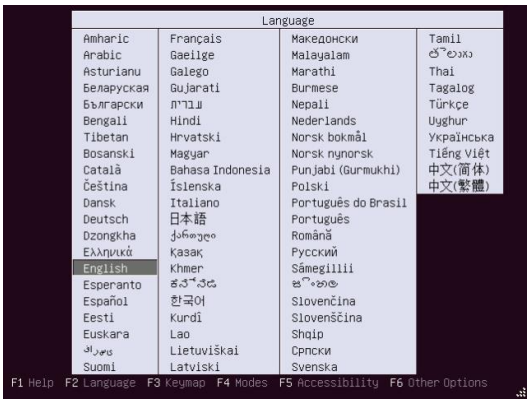
Step 1: Power ON EVE VM. Chose English and confirm with Enter. 	Step 2: Be sure if “Install Eve Agent” is highlighted. Confirm with Enter. 

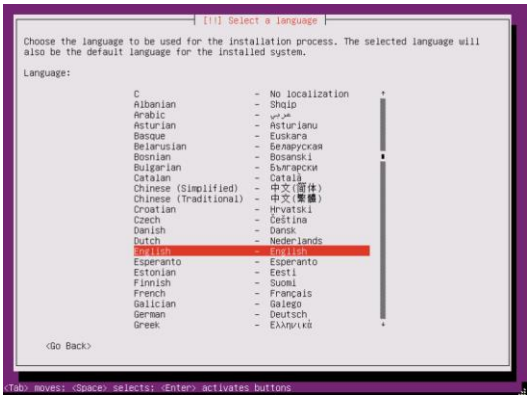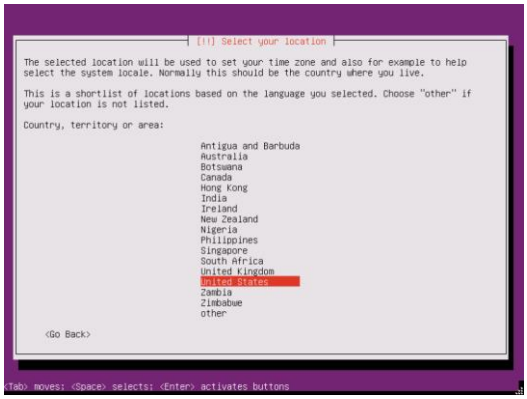Step 3: Make sure if English is selected and confirm with Enter. 	Step 4: You can select your own Location, or later, after management IP assignment, location will be set automatically. You can leave United States. Confirm with Enter 


Step 5: Configure keyboard, select NO confirm with Enter.




Step 6: Leave United States. Confirm with Enter

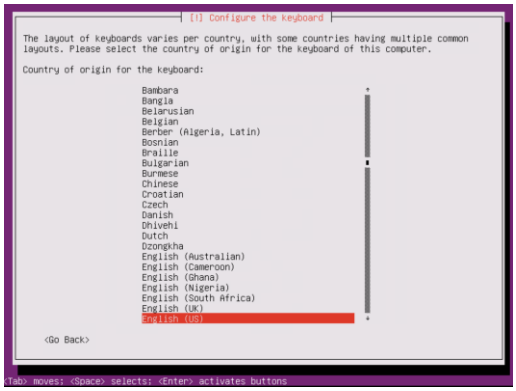

Step 7: Select English US confirm with Enter.

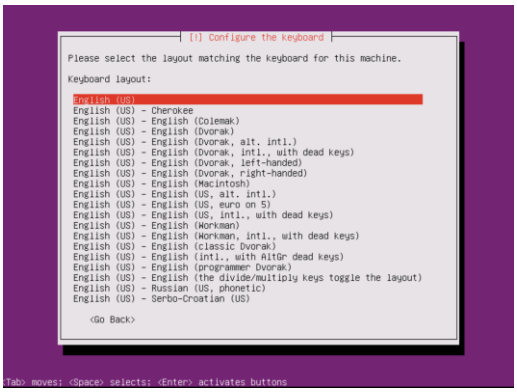



Step 8: **DHCP ENABLED**, EVEs hostname by default is **eve-ng**. You can change it if you wish. Using the Tab key select continue and confirm with Enter. Continue to **Step 15**

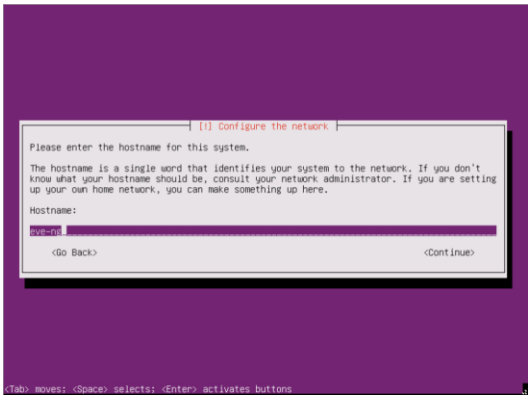

Step 9: **DHCP DISABLED**/Static IP setup. If you have not enabled DHCP in the network, you must assign an IP address manually. Confirm Continue with Enter.

Step 10: Confirm selection “Configure network manually” with Enter

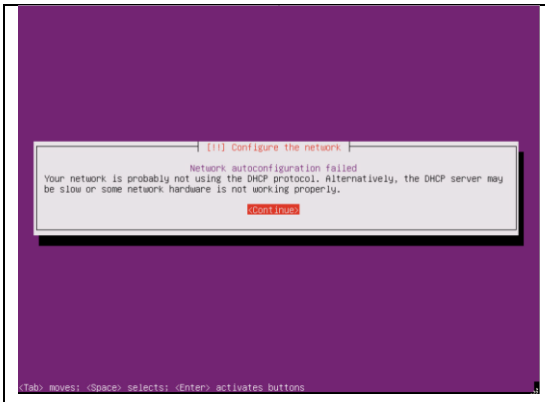

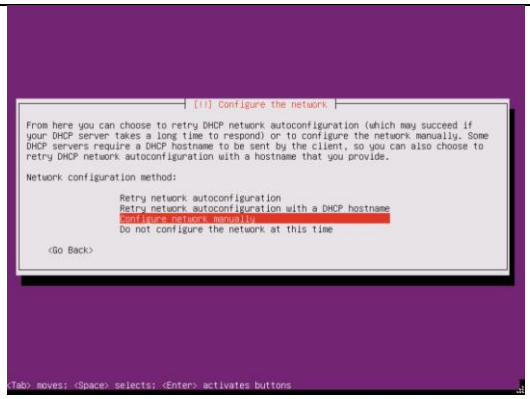

Step 11: Enter your desirable EVE management IP, using the Tab key select “Continue” and confirm with Enter




Step 12: Correct your subnet mask, using the Tab key select “Continue” and confirm with Enter





Step 13: Correct your Gateway IP, using the Tab key select “Continue” and confirm with Enter




Step 14: IMPORTANT. Name server must respond to the Internet and will be used during the next install steps. Enter your name server IP. Using the Tab key select “Continue” and confirm with Enter

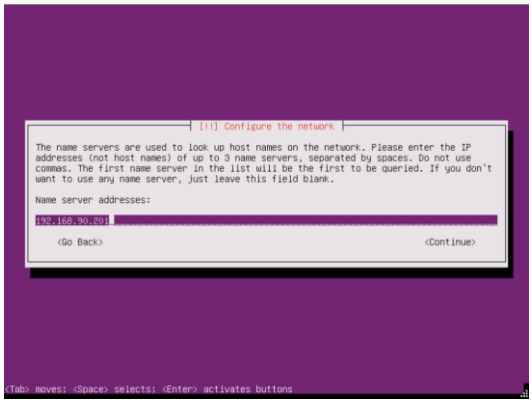


© EVE-NG LTD

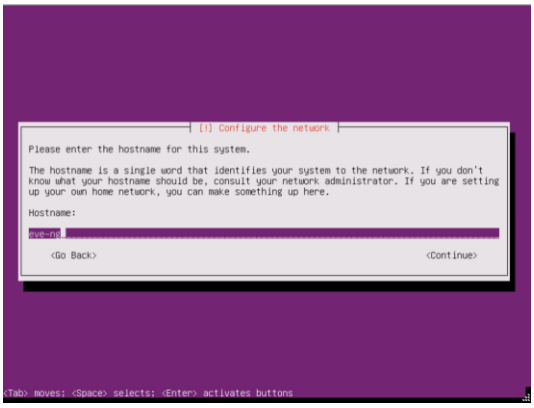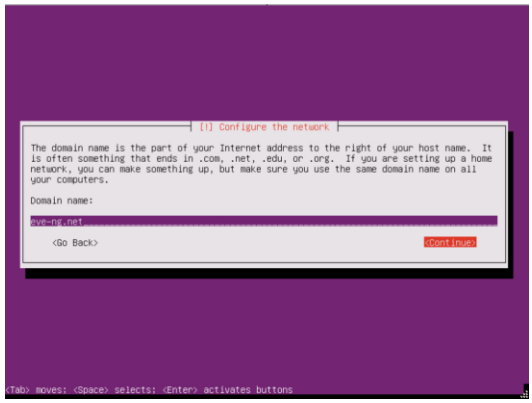Step 15: EVE hostname by default is **eve-ng**. It can be changed if you wish. Using the Tab key select continue and confirm with Enter 	Step 16: Enter your network domain name. You are free to use any, for example: **eve-ng.net** Using the Tab key select continue and confirm with Enter 	

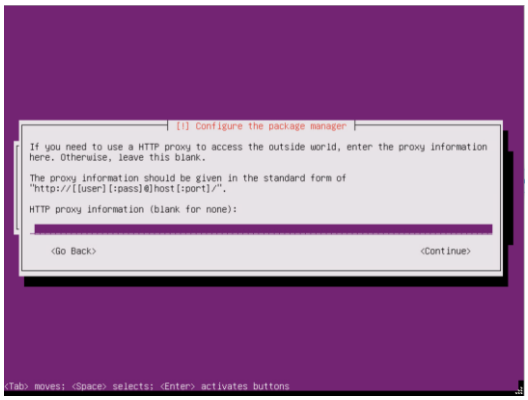Step 17: If your DNS IP settings are correct, Ubuntu will detect your location from Internet. Confirm with Enter. 	Step 18: Select Continue and confirm with Enter. 	

Step 19: Select **no automatic** updates and confirm with Enter. Security updates can be run later manually from EVE cli.		

© EVE-NG LTD

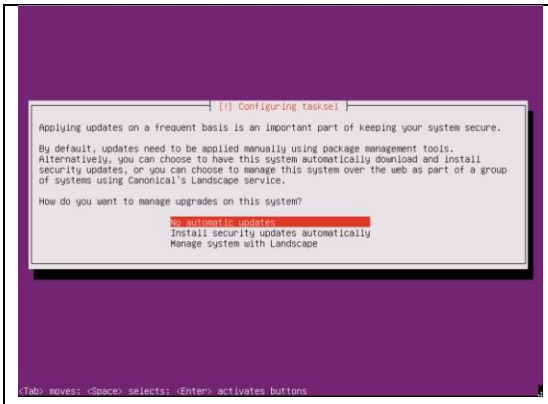EVE Satellite VM Installation Phase 2 (EVE Satellite installation)

Step 20: Continue with Enter, the EVE VM will reboot and finish the installation phase 2 	Step 21: Once EVE login screen appeared, login in CLI with root/eve and follow installation Phase 3 

EVE Satellite VM Installation Phase 3 (Management IP setup and updates)

Step 19: Setup EVE Management IP address. A Static IP address setup is preferred
 	
Follow steps in section **3.5.1** for static IP
	Step 20: After your EVE is rebooted,
	
	Login to EVE Satellite CLI and type:
	
	`apt update`
	`apt upgrade`

NOTE: To verify your EVE Satellite server installation type “dpkg -l eve-agent” it should display latest EVE Agent/Satellite version:

```
root@eve-sat01:~# dpkg -l eve-agent
Desired=Unknown/Install/Remove/Purge/Hold
|       Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-
aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                  Version         Architecture     Description
```

© EVE-NG LTD

```
+++-=======================-===============-================
==================================================
ii  eve-agent                 3.0.1-78          amd64              Agent
for EVE-NG Sat Cluster member
root@eve-sat01:~#
```

NOTE: If your newly installed satellite shows nothing like above, you must check your internet reachability and verify DNS configuration on your Satellite server.

```
root@eve-sat01:~# ping www.google.com
PING www.google.com (172.217.22.164) 56(84) bytes of data.
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=1
ttl=120 time=8.84 ms
64 bytes from arn09s11-in-f164.1e100.net (172.217.22.164): icmp_seq=2
ttl=120 time=8.84 ms
^C
--- www.google.com ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1001ms
rtt min/avg/max/mdev = 8.848/8.848/8.849/0.094 ms
root@eve-sat1:~#
```

Launch Satellite installation manually

```
root@eve-sat01:~# cd /etc
root@eve-sat01:~# ./eve-setup
```


15.5 Bare metal server EVE Satellite installation

Download Ubuntu 18 Server ISO distribution image:
https://releases.ubuntu.com/18.04/ubuntu-18.04.6-live-server-amd64.iso


⚠ Mandatory Prerequisites: Internet must be reachable from your Server. This ISO installation requires internet access to get updates and install the latest EVE-PRO version from the EVE-NG repository. DNS must resolve names!

15.5.1 Ubuntu Server Installation Phase 1

Step 1: Create a bootable DVD disk or USB flash drive with an Ubuntu server image.
Boot your server from ISO. Make sure that English is selected, Confirm with Enter

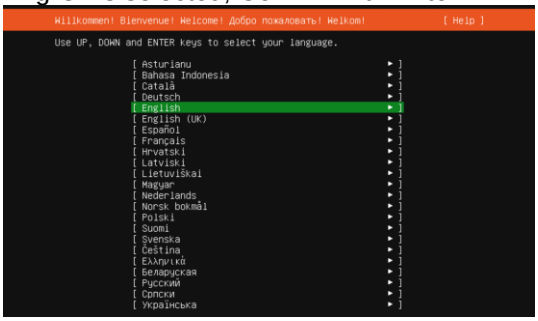


Step 2: Select “Update to the new installer” Confirm with Enter

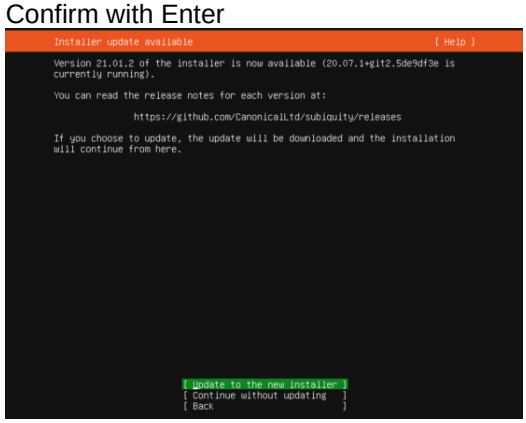


© EVE-NG LTD


Step 3: Make sure that English is selected and confirm Done with Enter

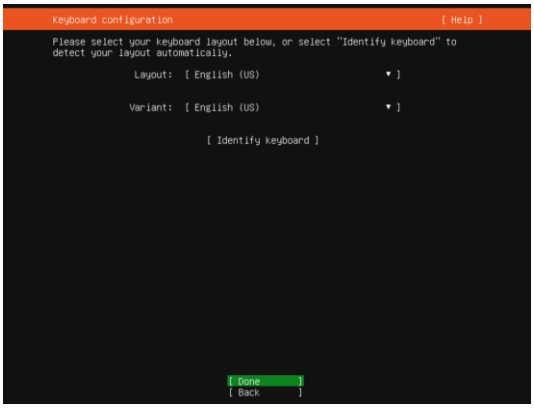


Step 4: It is strongly recommended to use Static IP address for bare metal server. Use Tab key and select ensXXX ethernet interface to edit, confirm with Enter

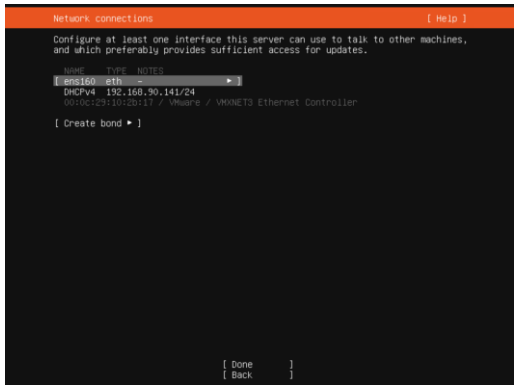


Step 5: Select “Edit IPv4”, confirm with enter.

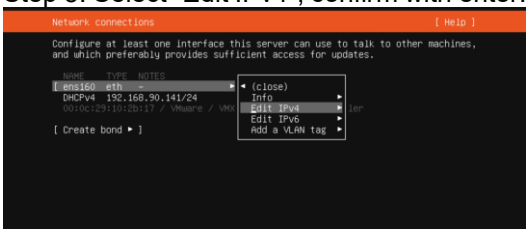


Step 6: Hit Enter, to select IPv4 method. Use down arrow key to select Manual. Confirm with Enter

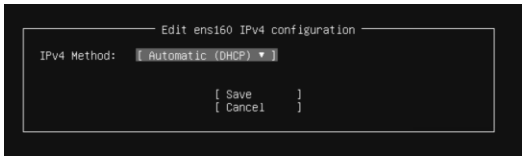


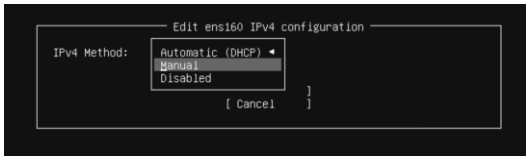

Step 7: Using Tab key fill your network settings. Select Save and confirm with Enter. The name server must be able to resolve public DNS entries!

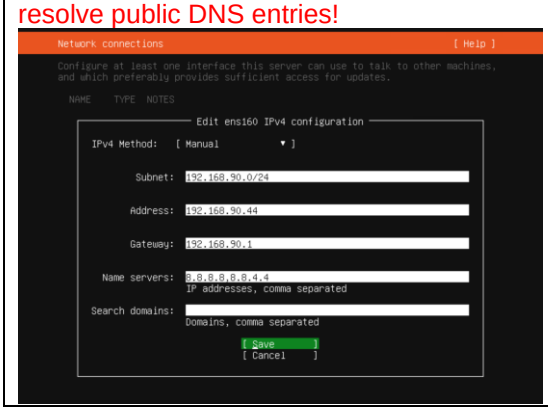


Step 8: Using Tab key select “Done” and confirm with Enter

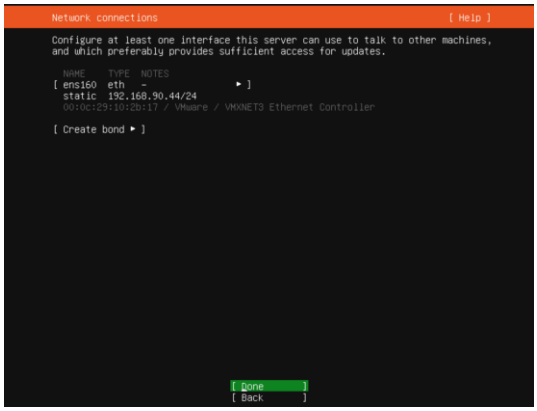


© EVE-NG LTD


Step 9: Select Done and confirm with Enter.

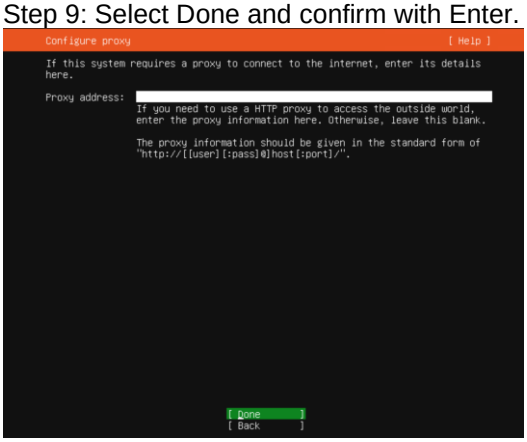


Step 10: If your network and DNS is configured properly, Ubuntu install will offer ubuntu mirror address from closest source. Continue with Enter.

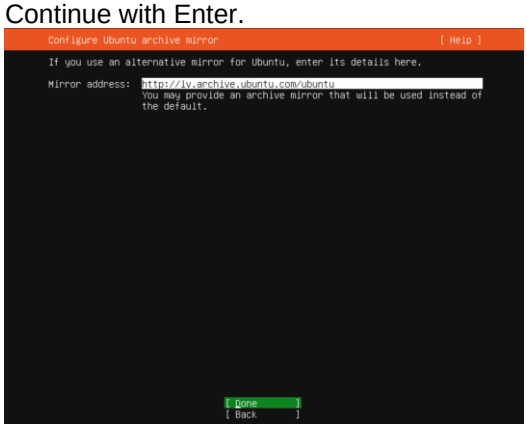


Step 11: Leave all default settings. Make sure is selected “Use entire disk” and “Set up this disk as LVM group”. Unselected “Encrypt the LVM group with LUKS”. Select Done and confirm with Enter.

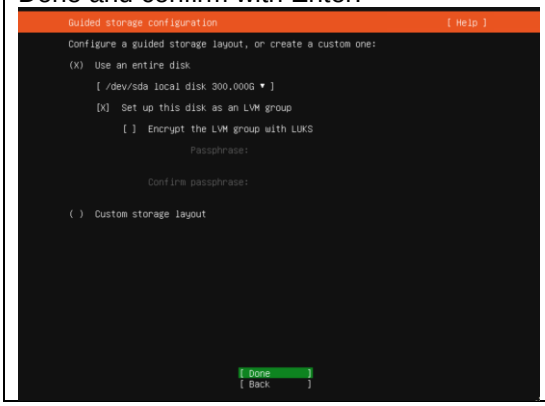


Step 12: Verify your HDD setting, select Done and confirm with Enter

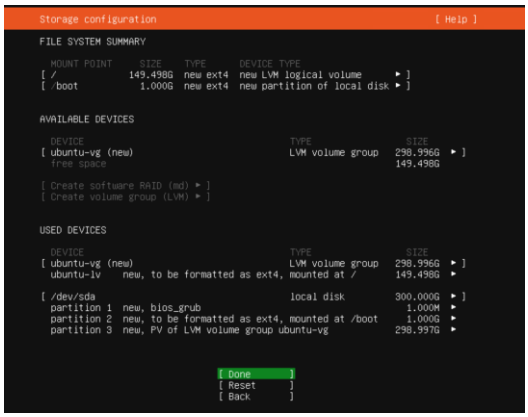

Step 13: Using Arrow down key select “Continue” and confirm with Enter

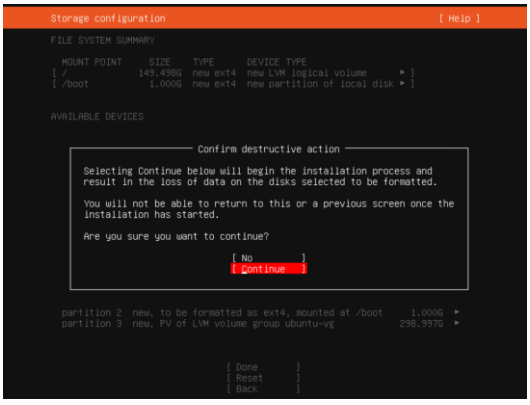


Step 14: Using the Tab key fill your user details, select Done and confirm with Enter

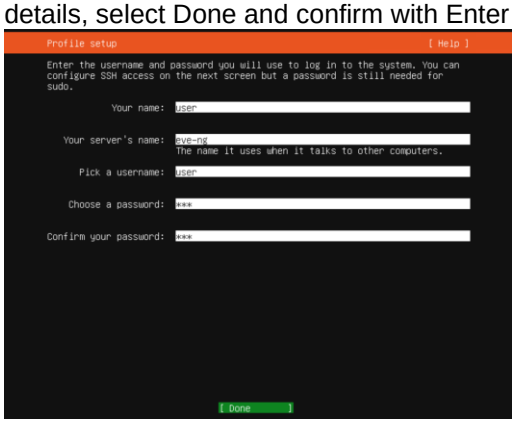


© EVE-NG LTD


Step 15: IMPORTANT: Using Spacebar key select “Install SSH OpenSSH server. Using the Tab key select “Done” and confirm with Enter

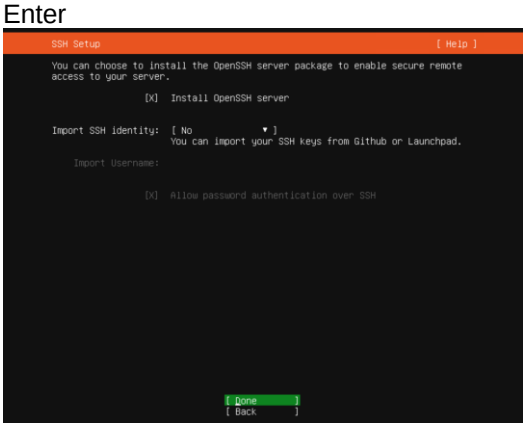


Step 16: Using Tab key select Done and confirm with Enter

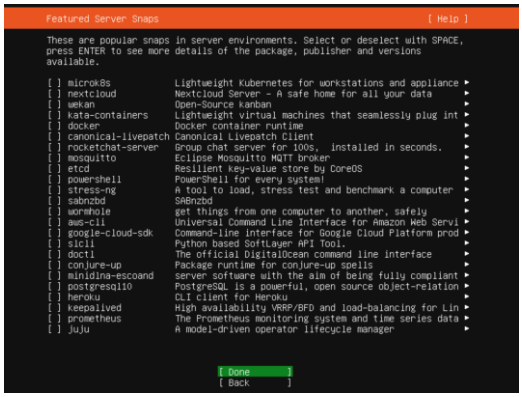


Step 17: Wait till your server finish Ubuntu install. Using Tab key select Reboot Now and confirm with Enter

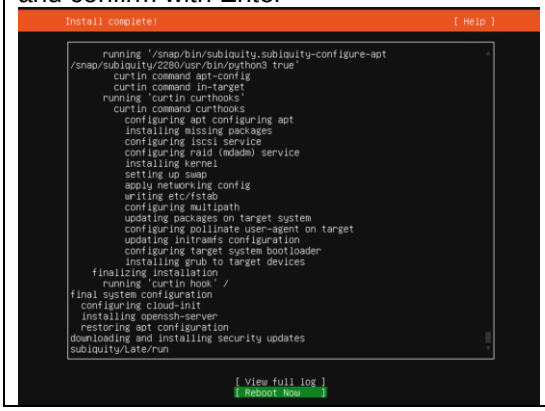

Step 18: Remove your installation media from server and confirm with Enter

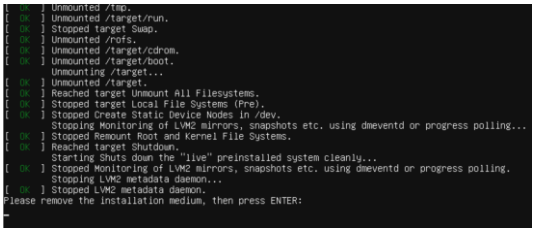


Step 19: Use your previously created username and password to login in server. Example in this how steps was user/eve

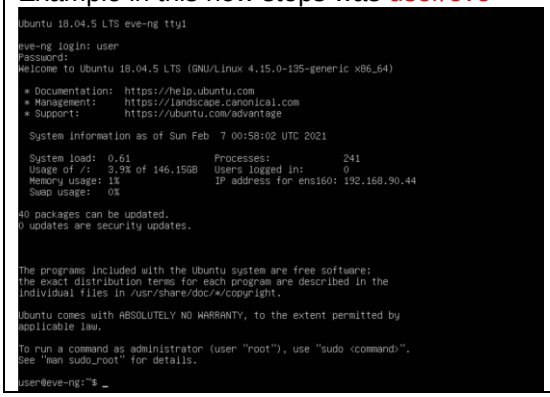

Step 20: Login in the server as root:

```
sudo su
[sudo] password for user: eve
```



© EVE-NG LTD

Step 21: Create root user password.

```
passwd root
Enter new UNIX password: eve
Retype new UNIX password: eve
```

```
root@eve-ng:~# passwd root
Enter new UNIX password:
Retype new UNIX password:
passwd: password updated successfully
root@eve-ng:~# _
```

Step 22: Allow SSH access for root user.

```
nano /etc/ssh/sshd_config
```

Navigate with arrow down key to uncomment
`PermitRootLogin prohibit-password`
Change to
`PermitRootLogin yes`

To save edited sshd_config use keys combo:
[Ctrl]+[o] Letter o (oscar)
Enter
[Ctrl]+[x] Letter x (x-ray) for exit

```
# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
PermitRootLogin yes
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10

#PubkeyAuthentication yes

# Expect .ssh/authorized_keys2 to be disregarded by default in future.
#AuthorizedKeysFile     .ssh/authorized_keys .ssh/authorized_keys2

#AuthorizedPrincipalsFile none

#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody

# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no
```

Step 23: Restart SSH service on the server.

```
service sshd restart
```

Step 24. IMPORTANT: expand your server LVM partition to use all size of the HDD volume. Use Putty or other native terminal access as root to the server:

```
apt clean
```

```
lvextend -l +100%FREE /dev/ubuntu-vg/ubuntu-lv
```

```
resize2fs /dev/ubuntu-vg/ubuntu-lv
```

```
root@eve-ng:~#
root@eve-ng:~# lvextend -l +100%FREE /dev/ubuntu-vg/ubuntu-lv
  Size of logical volume ubuntu-vg/ubuntu-lv changed from 149.50 GiB (38272 extents) to <299.00 GiB (76543 extents).
  Logical volume ubuntu-vg/ubuntu-lv successfully resized.
root@eve-ng:~# resize2fs /dev/ubuntu-vg/ubuntu-lv
resize2fs 1.44.1 (24-Mar-2018)
Filesystem at /dev/ubuntu-vg/ubuntu-lv is mounted on /; on-line resizing required
old_desc_blocks = 19, new_desc_blocks = 38
The filesystem on /dev/ubuntu-vg/ubuntu-lv is now 78380032 (4k) blocks long.

root@eve-ng:~#
```

```
root@eve-ng:~# df -h
Filesystem                  Size  Used Avail Use% Mounted on
udev                        7.9G     0  7.9G   0% /dev
tmpfs                       1.6G   11M  1.6G   1% /run
/dev/mapper/ubuntu--vg-ubuntu--lv  294G  9.7G  271G   4% /
tmpfs                       7.9G     0  7.9G   0% /dev/shm
tmpfs                       5.0M     0  5.0M   0% /run/lock
tmpfs                       7.9G     0  7.9G   0% /sys/fs/cgroup
/dev/sda2                   976M  159M  750M  18% /boot
tmpfs                       1.6G     0  1.6G   0% /run/user/0
root@eve-ng:~#
```

© EVE-NG LTD

Step 25: Reboot your server	Step 26: use Putty or other SSH terminal, login in your Server as root. Run update and upgrade commands

`reboot`	`apt update`
	`apt upgrade`
	`Confirm "y"`

15.5.2 EVE Satellite Installation Phase 2

Step 27: Launch EVE-Satellite (agent) Internet installation

```
wget -O - https://www.eve-ng.net/repo-bionic/install-eve-agent.sh | bash -i
```

Verification: Verify your EVE-Satellite server installation, type "dpkg -l eve-agent" command, it must display latest EVE Satellite version

```
root@eve-sat01:~# dpkg -l eve-agent
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                  Version          Architecture     Description
+++-=====================-================-================-
==================================================
ii  eve-agent               4.0.1-50          amd64            Agent for EVE-NG Sat
Cluster member
root@eve-sat01:~#
```

Step 28: Reboot EVE-Satellite (agent)

```
reboot
```

Step 29: After reboot login into your Agent server and follow Management IP setup instructions described in section 3.5.1 for Static IP

Step 30: After your Satellite is rebooted, login to the Satellite CLI and type:

```
apt update
apt upgrade
```


15.6 Google Cloud EVE Satellite installation


15.6.1 Preparing Ubuntu boot disk template

Step 1: Navigate: Navigation Menu/Compute Engine/VM Instances

Step 2: Open the google cloud shell and press: "START CLOUD SHELL"

© EVE-NG LTD



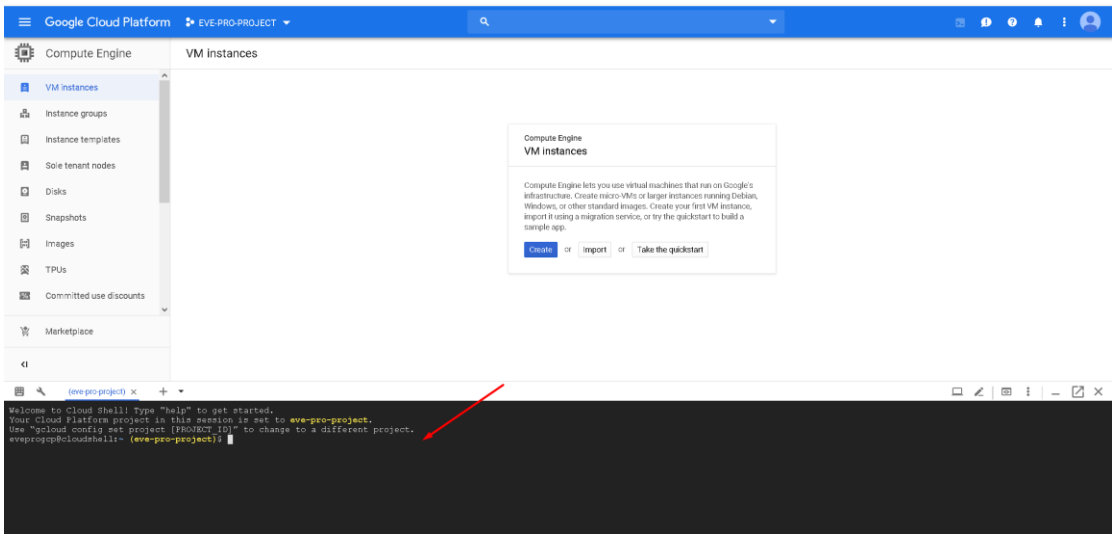


Step 3: create a nested Ubuntu 18.04 image model. Copy and paste the below command into the shell. Use copy/paste. crtl +c/ctrl +v. **It is single line command (copy all command below in cli)**. Confirm with “enter”:

```
gcloud compute images create nested-ubuntu-bionic --source-image-family=ubuntu-1804-lts --source-image-project=ubuntu-os-cloud --licenses https://www.googleapis.com/compute/v1/projects/vm-options/global/licenses/enable-vmx
```




You will get the following output when your image is ready:

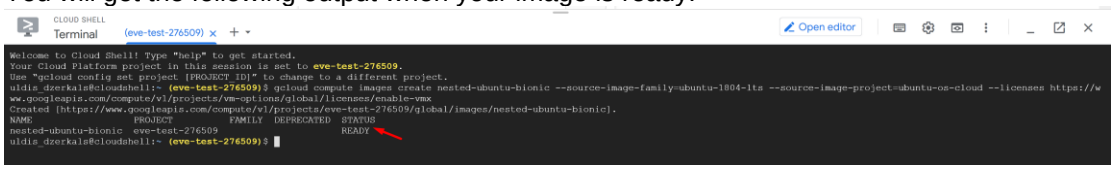

15.6.2 Creating VM

Step 1: Navigate: Navigation Menu/Compute Engine/VM Instances and press “Create”

© EVE-NG LTD

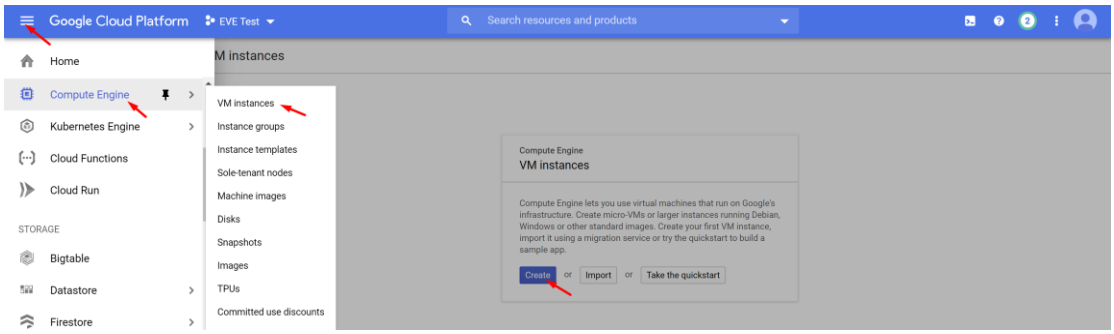


Step 2: Assign the name for your VM

Step 3: Set your own region and zone

Step 4: Edit your Machine Configuration. General-Purpose. Choose the series of CPU platform, Preferred are ***Intel CPUs Skylake or Cascade***.

Step 5: Choose your desirable CPU and RAM settings.
IMPORTANT: “Deploy a container image” must be UNCHECKED.

© EVE-NG LTD

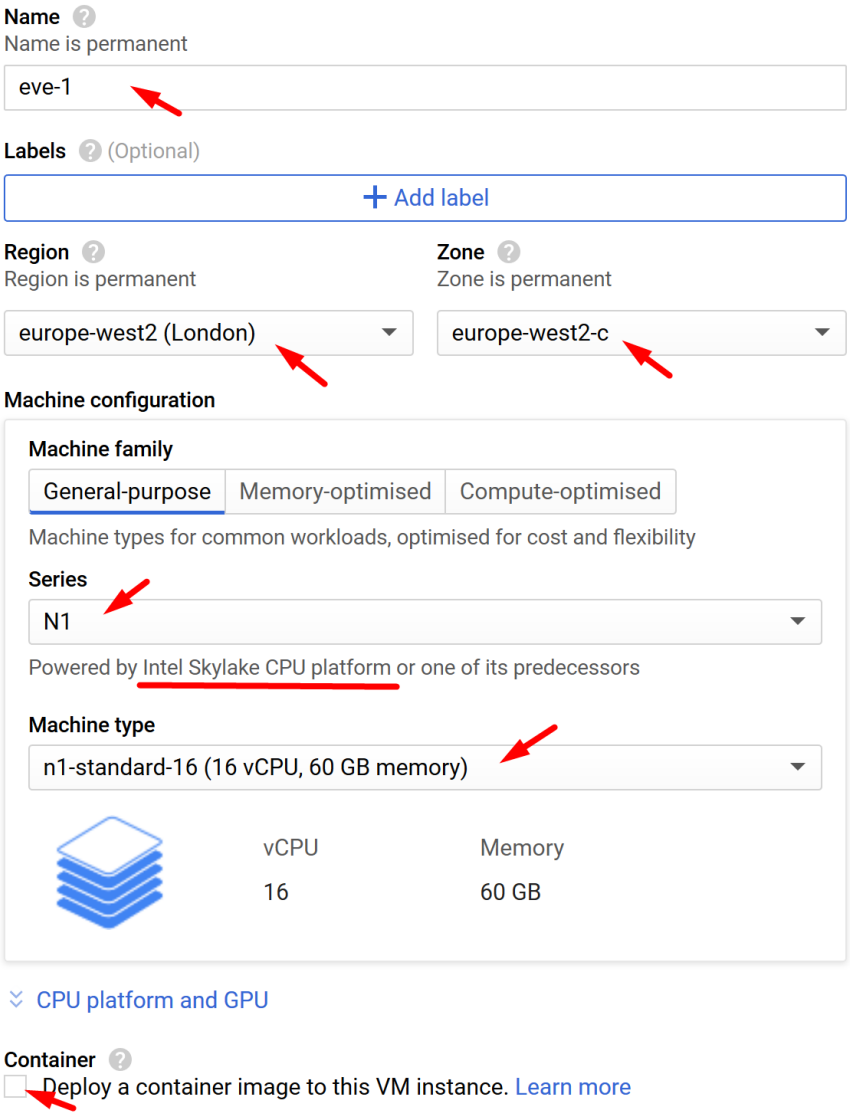


Step 6: Select Boot disk. Press Change




Step 7. Select Custom images and the ***custom boot image you created previously***. Choose HDD disk type and size. HDD size can vary depends of your needs.

© EVE-NG LTD

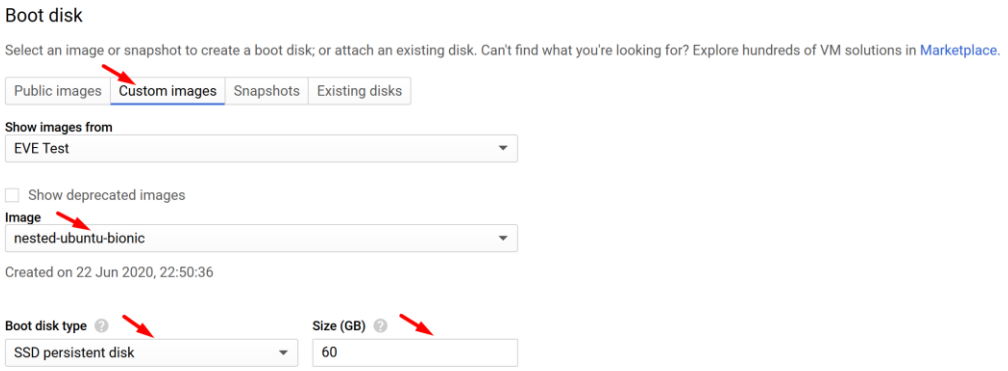


Step 7: Allow https traffic and create VM

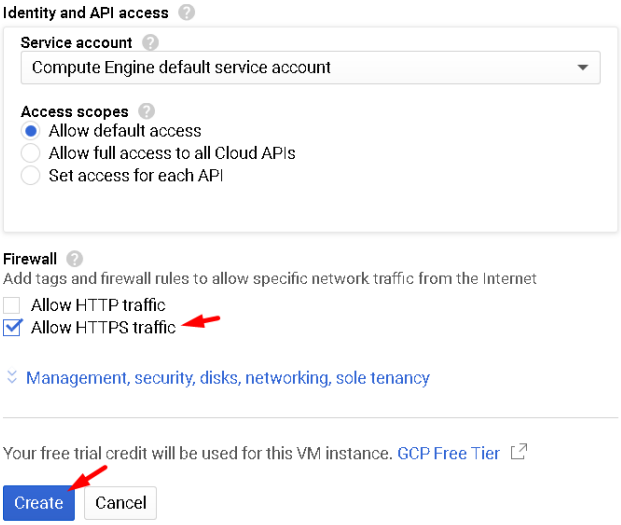

15.6.3 EVE GCP Satellite installation

Step 1: Connect to the VM with the first option “Open in browser window”



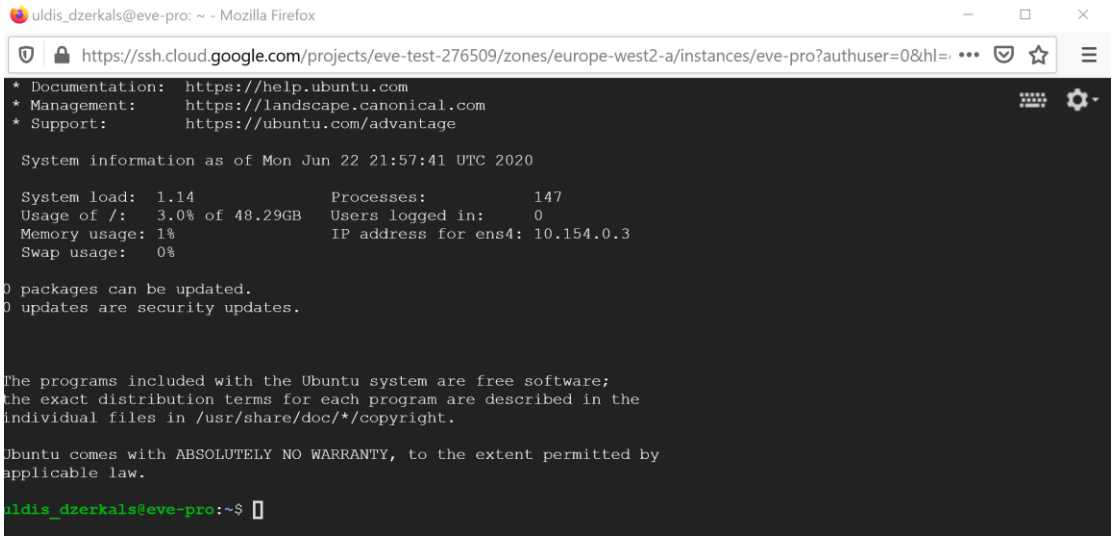

Step 2: Launch installation with:

Type the below command to become root:

```
sudo -i
```

Start EVE-Satellite installation

```
wget -O - https://www.eve-ng.net/repo-bionic/install-eve-agent.sh | bash -i
```


Step 3: Update and upgrade your new EVE-Satellite

```
apt update
```

```
apt upgrade
```


Confirm with Y

Step 4. Reboot EVE. Allow some time for reboot and then press “Reconnect”

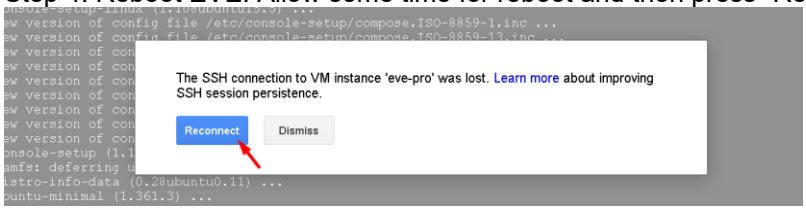

Step 5: VERY IMPORTANT: Setup IP
Once the IP wizard screen appears, press ctrl +c and type the below command to become root:

```
sudo -i
```

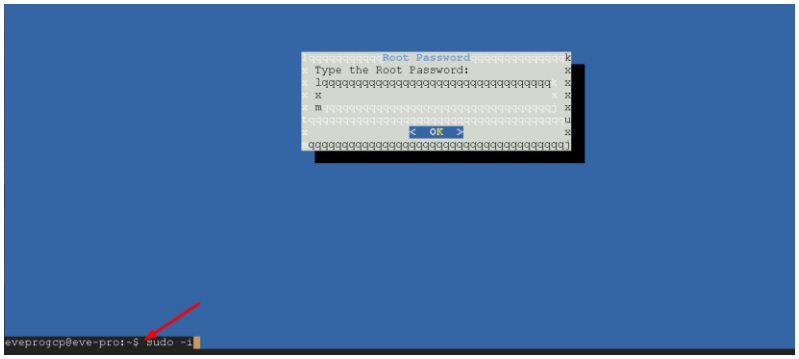

Now follow the IP setup wizard, section: 3.5.2.

© EVE-NG LTD


IMPORTANT: set IP as DHCP!

Your EVE-Satellite public IP will be used for join satellite to the MASTER node.




15.6.4 GCP Firewall rules for Cluster

Step 1: Navigate: Navigation menu/VPC Network/Firewall rules

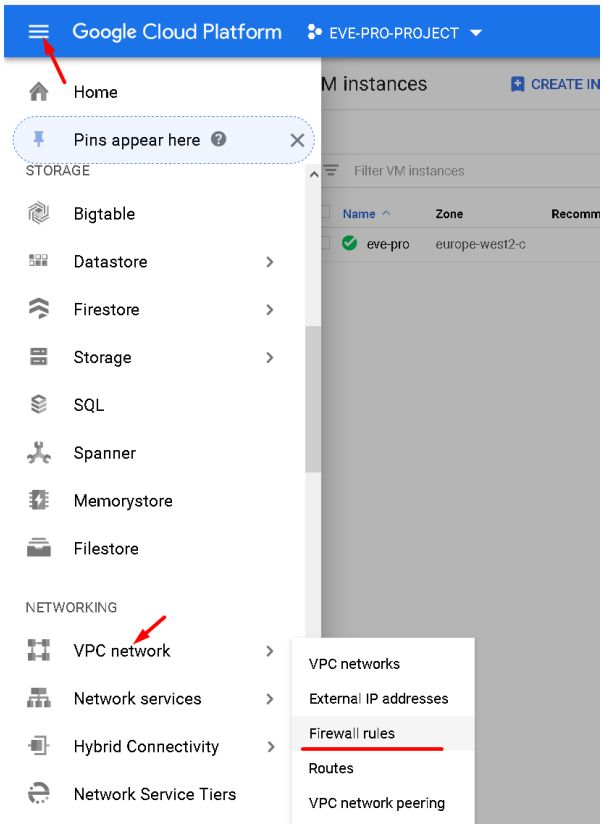

Step 2: Create new firewall rule

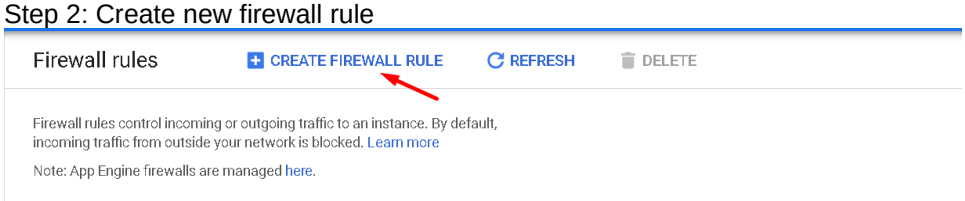

Step 3: Create an ingress and egress FW rules; allow UDP ports all and TCP 22

© EVE-NG LTD


	Name	Type	Targets	Filters	Protocols/ports	Action	Priority	Network	Logs
☐	egress-eve	Egress	Apply to all	IP ranges: 0.0.0.0/0	tcp:0-65535	Allow	1000	default	Off
☑	sat-1-rule-egress	Egress	Apply to all	IP ranges: 0.0.0.0/0	udp	Allow	1000	default	Off
☐	default-allow-http	Ingress	http-server	IP ranges: 0.0.0.0/0	tcp:80	Allow	1000	default	Off
☐	default-allow-https	Ingress	https-server	IP ranges: 0.0.0.0/0	tcp:443	Allow	1000	default	Off
☐	ingress-eve	Ingress	Apply to all	IP ranges: 0.0.0.0/0	tcp:0-65535	Allow	1000	default	Off
☑	sat-rule-ingress	Ingress	Apply to all	IP ranges: 0.0.0.0/0	udp	Allow	1000	default	Off
☐	default-allow-icmp	Ingress	Apply to all	IP ranges: 0.0.0.0/0	icmp	Allow	65534	default	Off
☐	default-allow-internal	Ingress	Apply to all	IP ranges: 10.128.0.0/9	tcp:0-65535 udp:0-65535 icmp	Allow	65534	default	Off
☐	default-allow-rdp	Ingress	Apply to all	IP ranges: 0.0.0.0/0	tcp:3389	Allow	65534	default	Off
☑	default-allow-ssh	Ingress	Apply to all	IP ranges: 0.0.0.0/0	tcp:22	Allow	65534	default	Off

15.7 Cluster Management


15.7.1 Join Satellite nodes to the Master

Step 1: Make sure that you have reachability between Master and Satellite nodes and firewall rules are configured in your network if FW is set between them. Firewall rules Section 15.2.1

Step 2: Navigate: System/Cluster Management

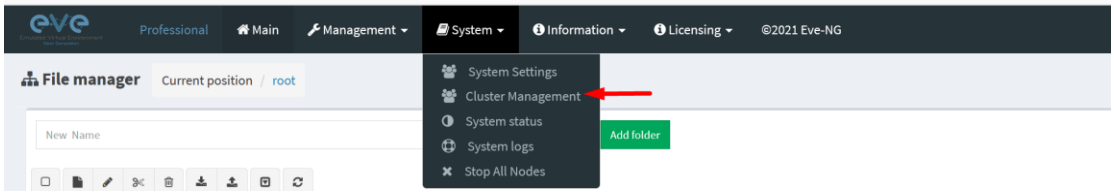


Step 2: Press Add Member

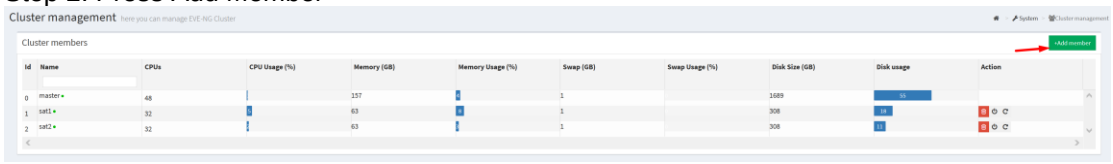

Step 3: Press Add Member and fill your Satellite details:

- Member's Name: use any suitable name for your satellite node
- IP address: Your satellite IP. In GCP version it will be public IP
- Member's Root Password: Your Satellite node password
- Press Add Member

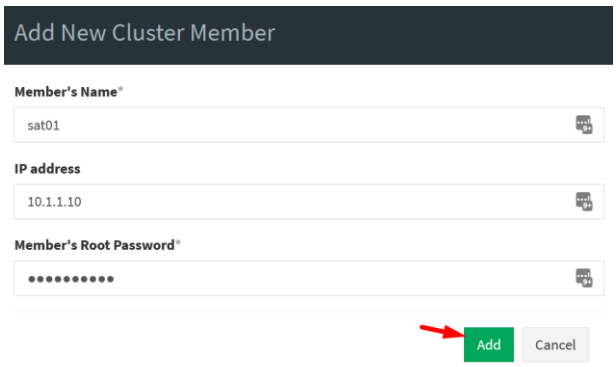

© EVE-NG LTD

Step 4: After certain of time Satellite will join to the Master



15.7.2 Remove Satellite nodes from the Master

Step 1: Navigate: System/Cluster Management

Step 2: Press Remove Member



15.7.3 Re-join Satellite nodes from the Master

Step 1: Navigate: System/Cluster Management

Step 2: Press Remove Member



Step 3: Go to Satellite node CLI and rest IP address. It is necessary to refresh SSH key for re-join Satellite to the Master.
CLI:
Login as root to the Satellite node and type:

```
rm -f /etc/wireguard/*
ip link set wg0 down
ip link del wg0

rm -f /opt/ovf/.configured
su -
```

EVE Satellite will initiate IP setup wizard. Follow Section 3.5.1

Step 4: Join Satellite accordingly Section 15.7.1

15.8 Cluster assignment hierarchy

The Cluster Hierarchy depends which of the option is assigned:

Option 1 - User assignment to cluster
Option 2 - Lab assignment
Option 3 - Individual node assignment


© EVE-NG LTD

	Cluster assignment Options	***Description***	***Conditions***
Option 1	EVE WEB GUI Management/User Management/Edit User/Satellite	Admin, Editor or User is forced to use only Cluster Satellite assigned by Admin. User cannot edit Lab or set individual nodes for other cluster Satellites. This Option can be assigned or edited only by Admin	If User account is set to use specific Satellite server, Users can NOT apply Options 2 and 3. This option applies to Admin user as well until Admin user will set his account to use "any"
Option 2	Lab is set to use Specific Cluster Satellite. Select Lab you want Edit/Select Satellite	If Option 1 is set to "any", then Admin or Editor is allowed to set Lab settings globally to use Lab on specific Cluster Satellite	Admin or Editor user accounts Satellite assignment (option 1) must be set to "any"
Option 3	Set lab nodes individually run on specific Cluster server	Admin or Editor can assign single Lab nodes run on specific Cluster Satellite servers	Options 1 and 2 must be set to "any"

Lab User is not allowed to use any of options above

15.8.1 User assignment to the dedicated Satellite (Option 1)

Step 1: Navigate to Management/User Management

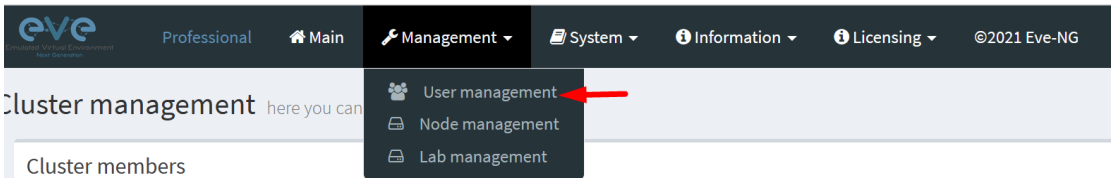

Step 2: Create or Edit existing user



Step 3: Choose the Satellite to be assigned for this user.

Step 4. User will be locked and will use only selected Satellite node. Editor and User roles cannot change or choose other satellite members.


© EVE-NG LTD




15.8.2 Lab assignment to dedicated cluster Satellite (Option 2)

Step 1: Navigate to Lab tree, Select Lab you want assign for dedicated Satellite

Step 2: Click “Edit”

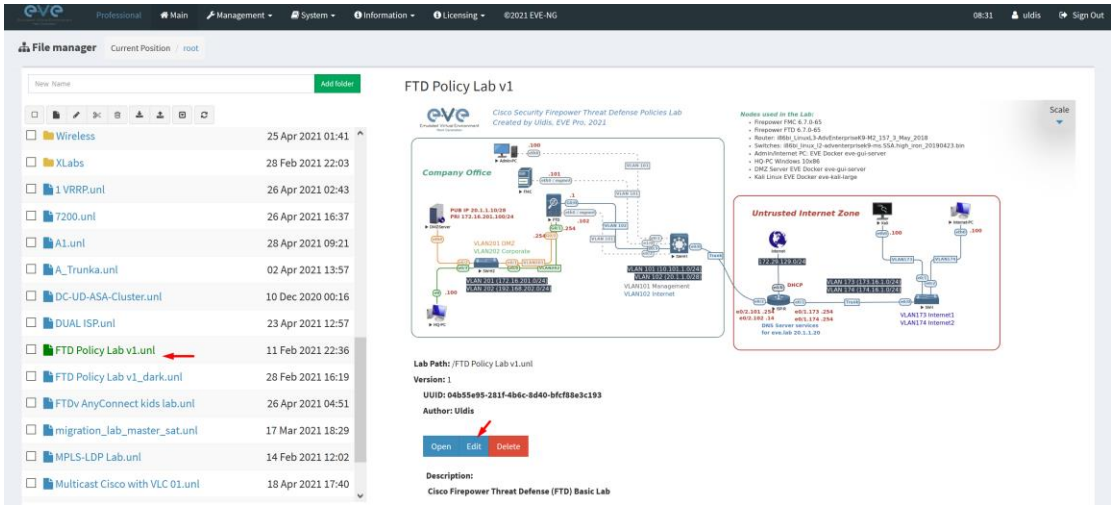

Step 3: Select Satellite for Lab

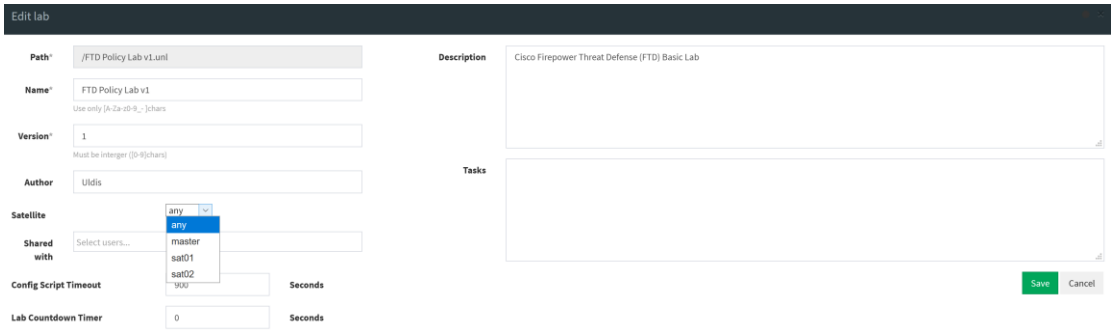

Note: Accordingly, Cluster hierarchy matrix above, this Option will be in force if Option 1 is left to default “any”


© EVE-NG LTD


15.8.3 Creating EVE labs in Cluster (Option 3)

Step 1: Create new or edit your existing lab

Step 2: On lab Node right click/edit


Step 3: Select preferred Satellite node and click save



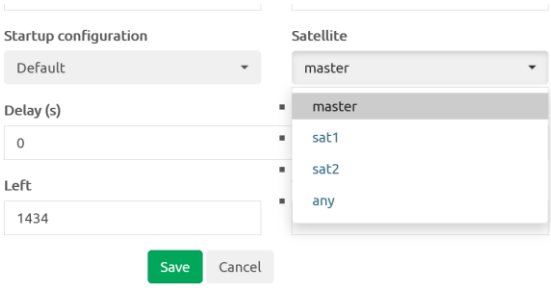

Option to assign cluster nodes for single lab devices.

Lab Side bar/Nodes, column SATELLITE, Select your cluster satellites for devices in the lab.

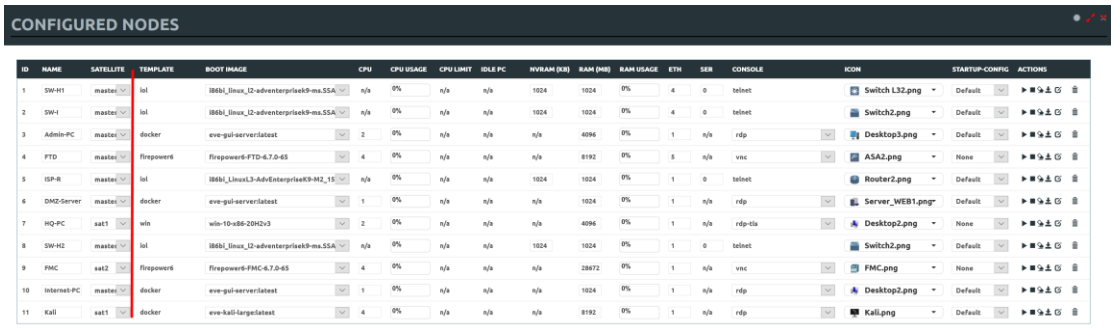

Note: Accordingly, Cluster hierarchy matrix above, this Option will be in force if Options 1 and 2 settings are left default “any”

15.8.4 Master images synchronization with Satellites

Once you have assigned certain lab device to use cluster Satellite node and start it, the automatic rsync process is initiated from Master node copy necessary image to the Satellite cluster member. During rsync process between Master and Satellite lab device will display “Clock” sign beside device. After image rsync process is completed, Lab device will turn sign to “Play”, running state.



Large size lab devices/images, rsync process can take some time. It depends of the network speed between the cluster members.

Once the image is copied into Satellite node, lab device will start immediately. RSYNC process initiates only once if particular device image does not exist on Satellite node.


© EVE-NG LTD

15.9 Cluster system monitoring


15.9.1 Cluster Monitoring page

Navigate: System/Cluster Management
Information columns displaying live information about cluster members utilization
Satellite nodes have option to reboot or shutdown.


If the cluster is healthy and fully functional, the Status column will display “GREEN” dot beside the cluster members.

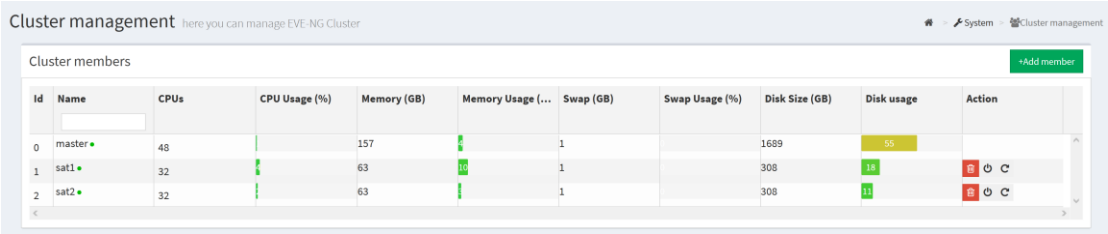

If the Satellite node is down or not reachable, the Status column will display “RED” dot

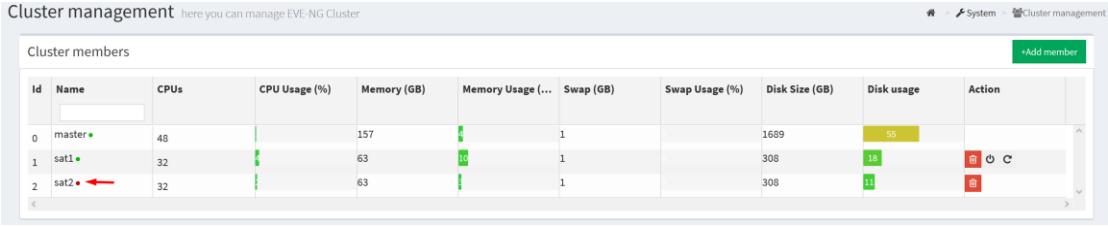

If the Satellite node is reachable but malfunctioning, Agent service is stopped or crashed, Status will be displayed as Yellow DOT. (stop/reboot possible)

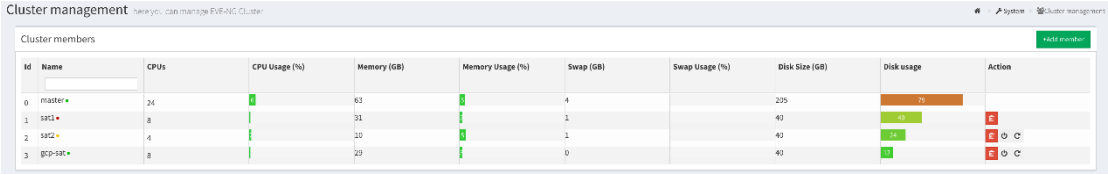


15.9.2 Satellite disaster recovery


Use case: If a satellite node crashed, was powered off while lab devices were running on it or the connection to the satellite was lost, the Master node will still have these nodes in a running state even if this is no longer the case.
To remediate this situation, you have to purge the local state information about the satellite before recovering the satellite, booting it back up or recovering the connection.


Step 1: To verify status of lab nodes:
Navigate Management/Nodes management. If you observing that crashed Satellite nodes are still alive and visible follow Step 2

© EVE-NG LTD

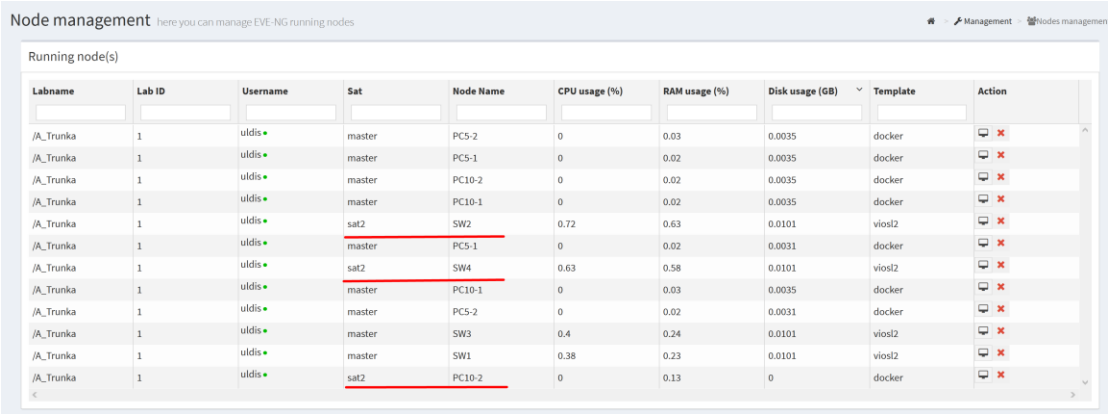


Step 2. Navigate: System/Cluster Management
Use **Purge** Button to clean crashed Satellite devices from the Master.

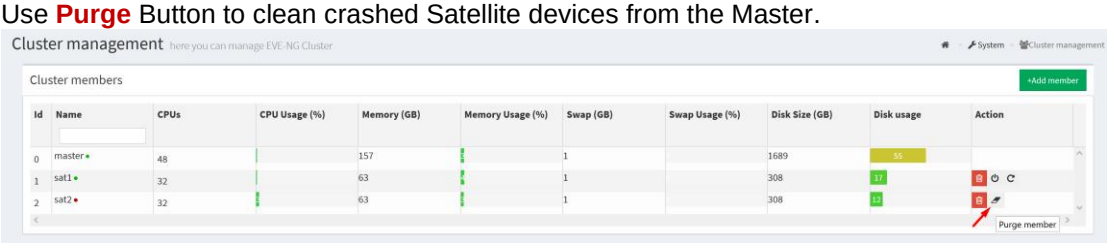

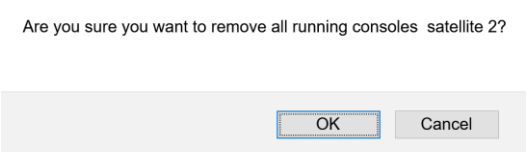

15.9.3 EVE Cluster Status

Navigate: System/Cluster Management

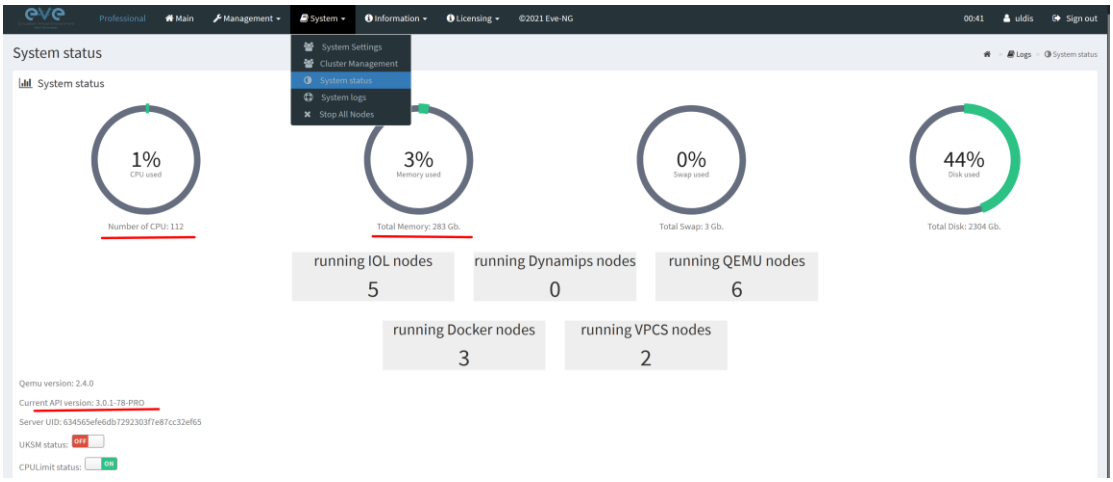

15.9.4 Cluster monitoring cli commands

On EVE Master:
Cluster System CLI Commands:

Check Cluster status:

```
root@eve-ng:~# unl_wrapper -a showcluster
Jan 31 23:56:52 Jan 31 23:56:52 Online Check state: Valid
Cluster Status:
############################################
0 master Online ( Local )
1 sat1 Online
2 sat2 Online
############################################
root@eve-ng:~#
```

SSH to the Satellite node from the Master status:

```
ssh 172.29.130.<satId>

#####Example SSH to SAT1#####
root@eve-ng:~# ssh 172.29.130.1
Welcome to Ubuntu 18.04.5 LTS (GNU/Linux 4.20.17-eve-ng-uksm-wg+
x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:     https://landscape.canonical.com
 * Support:        https://ubuntu.com/advantage

 * Canonical Livepatch is available for installation.
   - Reduce system reboots and improve kernel security. Activate at:
     https://ubuntu.com/livepatch
Last login: Sun Jan 31 22:24:06 2021 from 10.6.6.14
root
root@eve-sat1:~#
```

Check Cluster Satellite version:

```
root@eve-sat03:~# dpkg -l eve-agent
Desired=Unknown/Install/Remove/Purge/Hold
|       Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-
aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                          Version              Architecture
Description
+++-=========================-================-================-
=======================================================
ii  eve-agent                  4.0.1-50          amd64             Agent
for EVE-NG Sat Cluster member
root@eve-sat03:~#
```

15.10 Cluster system upgrade

Pre-requisites: The Master node must reach internet and resolve DNS.

On the EVE Master CLI run commands:

```
apt update
apt upgrade
```

The cluster Satellites will upgrade automatically with EVE master. There no need any extra upgrade run for Satellite nodes.

To update manually Satellite nodes from Master EVE:

© EVE-NG LTD

```
root@eve-ng:~# unl_wrapper -a updatesat

Feb 01 00:03:24 Feb 01 00:03:24 Online Check state: Valid
Feb 01 00:03:24 update sat 1
ii  eve-agent       3.0.1-71      amd64         Agent for EVE-NG Sat
Cluster member
Feb 01 00:03:24 update sat 2
ii  eve-agent       3.0.1-71      amd64         Agent for EVE-NG Sat
Cluster member
root@eve-ng:~#
```

© EVE-NG LTD

16 EVE Troubleshooting

16.1 CLI diagnostic information display commands

16.1.1 Display full EVE Pro diagnostic

```
eve-info
```

16.1.2 Display the currently installed EVE Pro version:

```
dpkg -l eve-ng-pro
```

```
root@eve-ng:~# dpkg -l eve-ng-pro
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                  Version          Architecture     Description
+++-=====================-================-================-================================================
ii  eve-ng-pro            2.0.4-21         amd64            A new generation software for networking labs.
root@eve-ng:~#
```

16.1.3 Display if EVEs Intel VT-x/EPT option on/off:

```
kvm-ok
```

```
root@eve-ng:~# kvm-ok
INFO: /dev/kvm exists
KVM acceleration can be used
root@eve-ng:~#
```

16.1.4 Display EVEs CPU INFO:

```
lscpu
```

```
root@eve-ng:~# lscpu
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                24
On-line CPU(s) list:   0-23
Thread(s) per core:    1
Core(s) per socket:    1
Socket(s):             24
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 44
Model name:            Intel(R) Xeon(R) CPU           X5680  @ 3.33GHz
Stepping:              2
CPU MHz:               3324.053
BogoMIPS:              6650.00
Virtualization:        VT-x
Hypervisor vendor:     VMware
```

16.1.5 Display EVEs CPU manufacturer:

```
lsmod | grep ^kvm_
```

```
root@eve-ng:~# lsmod | grep ^kvm_
kvm_intel             212992  74
root@eve-ng:~#
```

16.1.6 Display EVEs HDD utilization.

If the /boot only has a little space left you can refer to section **Error! Reference source not found.**. If the eve—ng—vg—root reaches 99% or 100% then you will need to expand the HDD in order to continue using EVE. The Solution to expand your HDD is described in section 16.1

```
df -h
```

```
root@eve-ng:~# df -h
Filesystem                   Size  Used Avail Use% Mounted on
udev                          40G     0   40G   0% /dev
tmpfs                        7.9G   52M  7.9G   1% /run
/dev/mapper/eve--ng--vg-root  681G  370G  283G  57% /
tmpfs                         40G     0   40G   0% /dev/shm
tmpfs                        5.0M     0  5.0M   0% /run/lock
tmpfs                         40G     0   40G   0% /sys/fs/cgroup
/dev/sda1                    472M   83M  365M  19% /boot
root@eve-ng:~#
```

16.1.7 Display EVEs Bridge interface status

```
brctl show
```

```
root@eve-ng:~# brctl show
bridge name     bridge id               STP enabled     interfaces
docker0         8000.0242c0db8435       no
nat0            8000.000000000000       no
pnet0           8000.000c29d0aa94       no              eth0
pnet1           8000.000c29d0aabc       no              eth1
                                                        vunl1_0_1_0
pnet2           8000.000c29d0aa9e       no              eth2
pnet3           8000.000c29d0aaa8       no              eth3
pnet4           8000.000c29d0aab2       no              eth4
pnet5           8000.000000000000       no
pnet6           8000.000000000000       no
pnet7           8000.000000000000       no
pnet8           8000.000000000000       no
pnet9           8000.000000000000       no
```

16.1.8 Display EVEs system services status

```
systemctl list-unit-files --state=enabled
```

```
root@eve-ng:~# systemctl list-unit-files --state=enabled
UNIT FILE                    STATE
accounts-daemon.service      enabled
autovt@.service              enabled
capdog.service               enabled
cpulimit.service             enabled
cron.service                 enabled
docker.service               enabled
getty@.service               enabled
lvm2-monitor.service         enabled
mysql.service                enabled
networking.service           enabled
open-vm-tools.service        enabled
openvswitch-switch.service   enabled
ovfstartup.service           enabled
resolvconf.service           enabled
rsyslog.service              enabled
ssh.service                  enabled
sshd.service                 enabled
syslog.service               enabled
systemd-timesyncd.service    enabled
unattended-upgrades.service  enabled
ureadahead.service           enabled
dm-event.socket              enabled
docker.socket                enabled
lvm2-lvmetad.socket          enabled
lvm2-lvmpolld.socket         enabled
uuidd.socket                 enabled
remote-fs.target             enabled
apt-daily-upgrade.timer      enabled
apt-daily.timer              enabled
```


16.2 Expand EVEs System HDD

⚠ IMPORTANT NOTE: DO NOT expand your current/existing HDD on your EVE VM!


© EVE-NG LTD

16.2.1 HDD space alert

Important: by default, EVE will trigger alerts if there are 3GB or less HDD space available. Additional nodes will not start until more space is added or freed up. A link is provided in the notification bubble on how to properly add an additional HDD.

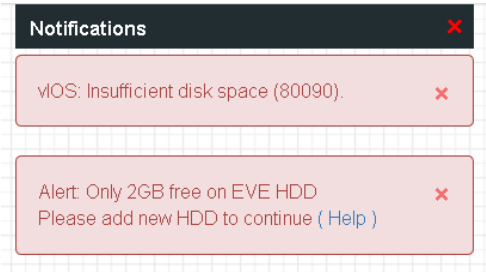


To edit HDD space threshold for the alert is customizable. please follow section: **7.4.1**

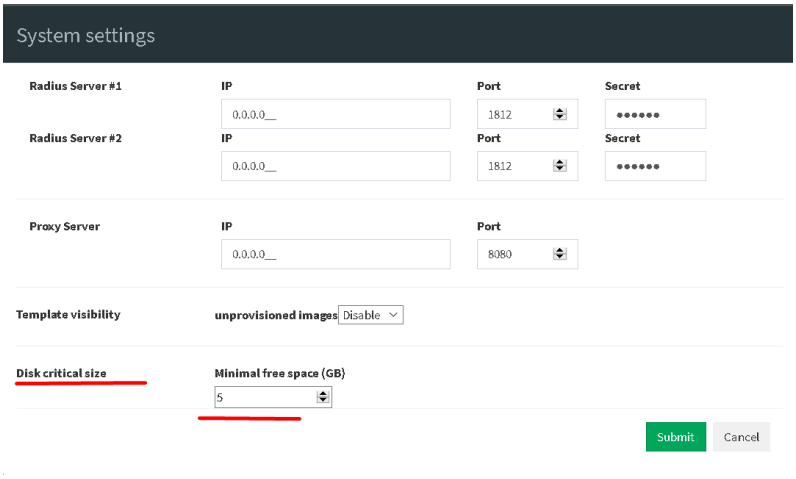

16.2.2 Expand HDD on VMware Workstation

Expanding your EVEs system HDD is achieved by adding an additional HDD to your EVE VM.

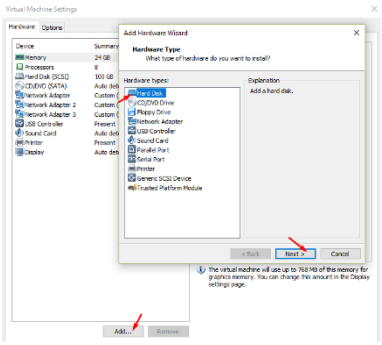

Step 1: Stop all your labs and shutdown EVE.

Use EVE CLI command: **shutdown -h now**

Step 2: Go to edit VM settings and add a new Hard drive. Then click Next.

Step 3: Leave the recommended SCSI HDD option and then click Next

Step 4: Make sure you have selected the option “Create a new Virtual disk.”

Step 5: Set your desirable HDD Size; example 200GB.

Step 6: Make sure you have set the option “Store Virtual disk as a single file” and then click Next

Step 7: Optional: Specify the location of where your new HDD will be stored, then click Finish.

© EVE-NG LTD


Step 8: Boot your EVE VM, HDD size will be expanded automatically. To verify, use the command to verify HDD utilization referenced in section 16.1.5

16.2.3 Expand your HDD on ESXi

Expanding your EVEs system HDD is achieved by adding an additional HDD to your EVE VM.

Step 1: Stop all your labs and shutdown EVE.

Use EVE CLI command: **shutdown -h now**

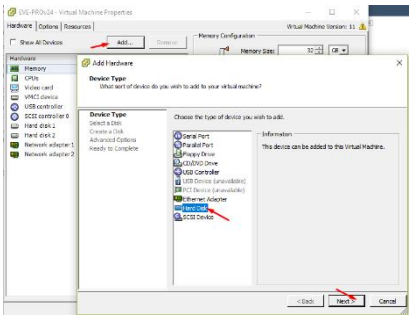

Step 2: Go to edit VM settings and add a new Hard drive. Then click Next

Step 3: Make sure you have selected the option “Create a new Virtual disk.” Then click Next

Step 4: Set your desirable HDD Size; example 200GB.

Step 5: It is recommended to set the Thick Provision Lazy Zeroed HDD option.

Step 6: Specify the location of where your new HDD will be stored and then click Next

Step 7: Leave the recommended SCSI HDD option as is and click Finish.

Step 8: Boot your EVE VM, the HDD size will be expanded automatically. To verify, use the command to verify HDD utilization referenced in section 16.1.5

16.2.4 Expand your HDD on a Bare Metal EVE Server

It is a complicated process to expand a HDD for a bare metal EVE server. Please open a ticket in our Live chat support for advice.

https://www.eve-ng.net/index.php/live-helpdesk/

Use a google account to join in the Live Chat or create new chat account.

16.3 Reset Management IP

Type the following commands into the CLI followed by enter:

```
rm -f /opt/ovf/.configured
```

```
su -
```

http://www.eve-ng.net/documentation/installation/bare-installIP address setup wizard. Please follow the steps in section 3.5.1 for Static IP or 3.5.2 for DHCP IP setup.

16.4 EVE PRO SQL Database recovery

Starting EVE PRO version 3.0.1-21 and later, you can recover SQL user database in case of disaster:

© EVE-NG LTD

```
unl_wrapper -a restoredb
```

Below is SINGLE LINE Command to restore SQL Database.

```
unl_wrapper -a restoredb ; grep -q default_time_zone
/etc/mysql/mysql.conf.d/mysqld.cnf || echo
"default_time_zone='+00:00'" >> /etc/mysql/mysql.conf.d/mysqld.cnf ;
systemctl restart mysql
```

16.5 EVE PRO Migration from host to host

Step 1: On newly installed EVE navigate to:

```
cd /opt/unetlab/scripts
```

Step 2: Run migration script migrate.sh where source IP is your old EVE host IP and root password of old EVE. [**./migrate.sh -s <old eve ip> -p <root password>**]

Example:


```
root@eve-ng:/opt/unetlab/scripts# ./migrate.sh -s 192.168.1.100 -p eve
```

Step 3: After migration is completed, deactivate EVE license on old host, and load license in the new EVE machine.


https://www.eve-ng.net/index.php/documentation/howtos/recover-rehosting-eve-ng/

16.6 EVE Log files

EVE log Files can be obtained from the System Logs page under the System dropdown menu



Use the menu to collect log file data you are interested in.

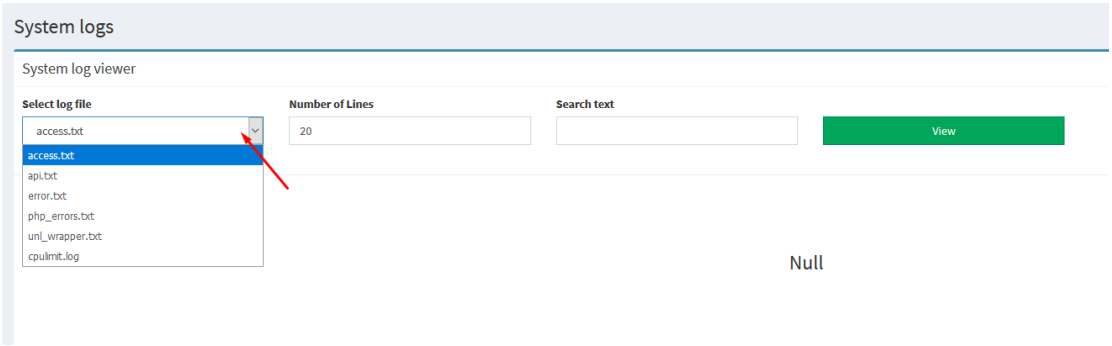

16.7 EVE cli diagnostic info

Use EVE cli to obtain your EVE information:

© EVE-NG LTD

```
eve-info
```


© EVE-NG LTD

17 EVE Extras

17.1 EVE Pro Radius server setup for user authentication

⚠ Mandatory Prerequisites: Updated EVE-PRO version 2.0.6-30 or later.

Please follow section: **7.4.1**

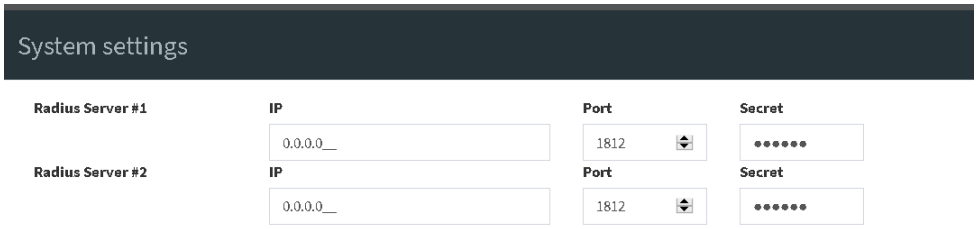


17.1.1 EVE User setup for Radius authentication


Step 1: Open the User management submenu. Management>User management and click Add user

Step 2: The Add New User management window will pop up. Fill in the main information about your EVE user. Make sure that you're the username of the account created in EVE matches with the Radius server database.

Step 3: Enable the External Auth (Radius) checkbox. Any existing password will be removed, because the authenticator will check with the Radius server for credentials.

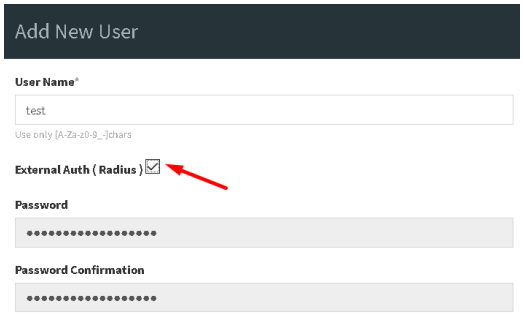


Step 4: If you have purchased licenses for different EVE user roles, you can choose the preferred user role. For licensing and user roles please refer to section **4**

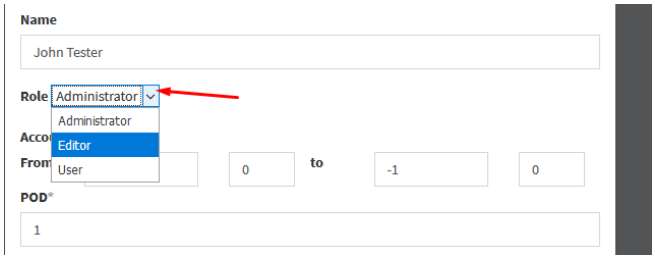

Step 5: Set the access date and time From - to. If the fields are left empty (untouched), your user will have no time restrictions for accessing the EVE Server. Account validity with time settings is available for Editor and User roles only.

© EVE-NG LTD

⚠ Admin accounts have no time limit for account validity, and Account Validity time cannot be set.

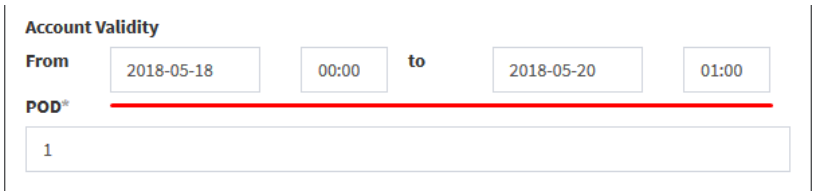


Step 6: The POD number is a value assigned to user accounts automatically. POD numbers are like user profiles inside of EVE and are a unique value for every user Think of PODs like a virtual rack of equipment for each user. Admins can assign a preferred number between 1-128. Please keep POD numbers unique between users!

Step 7: Press ADD 

Step 8. The username created inside EVE must match the username on the Radius server

Example: EVE user authenticated with ISE 2.1 Radius server.

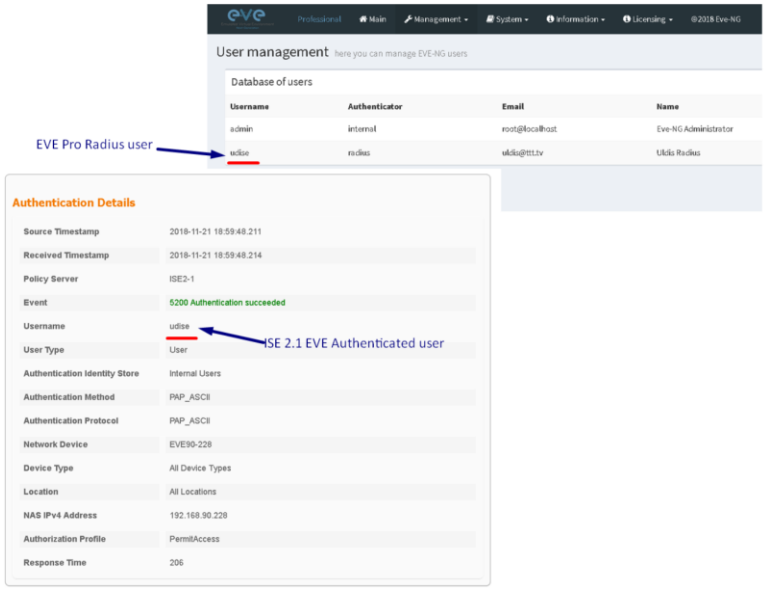


17.2 Active Directory user authentication

⚠ Mandatory Prerequisites: Updated EVE-PRO version 2.0.6-30 or later.

To join Active Directory to the EVE, Please follow section: **7.4.1**

© EVE-NG LTD

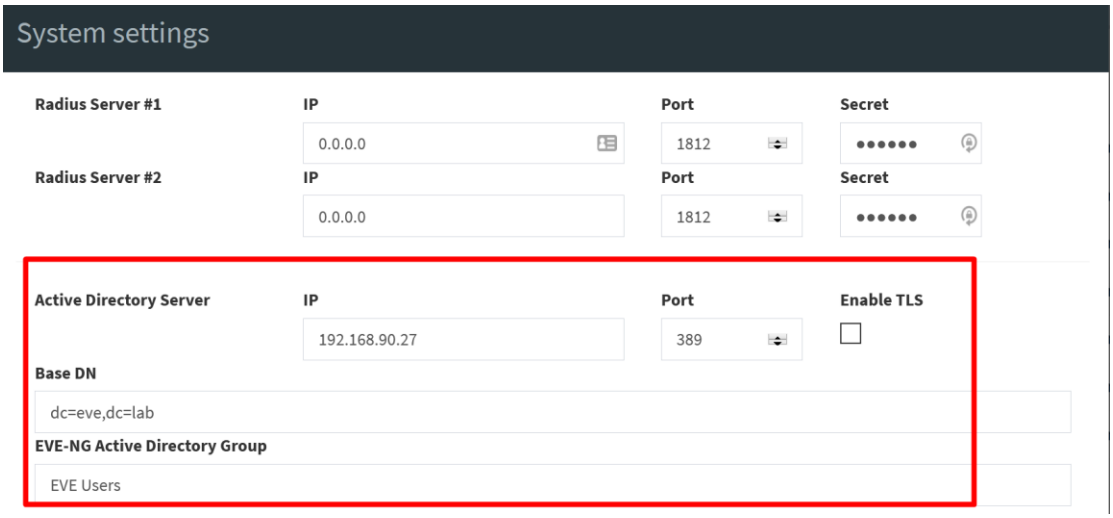


17.2.1 EVE User setup for AD (LDAP) authentication

Step 1: Open the User management submenu. Management>User management and click Add user


Step 2: The Add New User management window will pop up. Fill in the main information about your EVE user. Make sure that you're the username of the account created in EVE matches with the Radius server database.

Note: The username in of the Active directory user account must match with AD username. Username must have domain at the end of username. Example: evelabuser@eve.lab

Step 3: Enable the Active Directory from Authentication menu. Any existing password will be removed, because the authenticator will check with the Active Directory server for credentials.

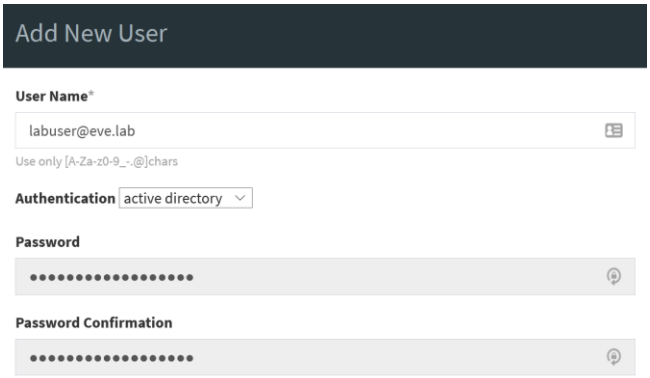


Step 4: If you have purchased licenses for different EVE user roles, you can choose the preferred user role. For licensing and user roles please refer to section **4**

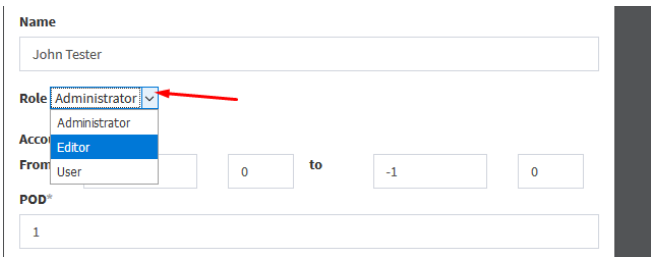

© EVE-NG LTD

Step 5: Set the access date and time From - to. If the fields are left empty (untouched), your user will have no time restrictions for accessing the EVE Server. Account validity with time settings is available for Editor and User roles only.

⚠ Admin accounts have no time limit for account validity, and Account Validity time cannot be set.

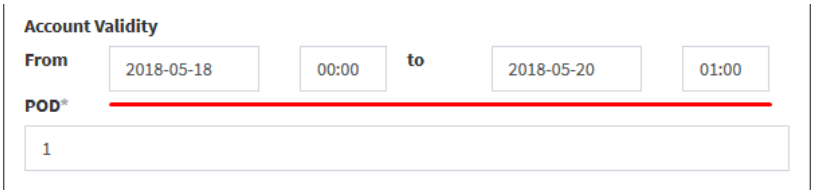

Step 6: The POD number is a value assigned to user accounts automatically. POD numbers are like user profiles inside of EVE and are a unique value for every user Think of PODs like a virtual rack of equipment for each user. Admins can assign a preferred number between 1-32786. Please keep POD numbers unique between users!


Step 7: Press ADD 

Step 8. The username created inside EVE must match the username on the Radius server

17.3 Lab Chat



Refer section: 8.1.12

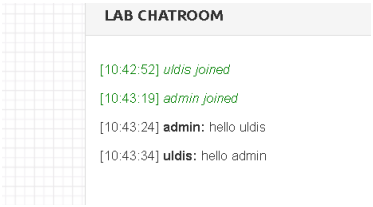



17.4 Custom MAC address for node management

NOTE: Custom first MAC is supported for Qemu nodes only.

Qemu nodes has option to change first interface MAC address.

© EVE-NG LTD

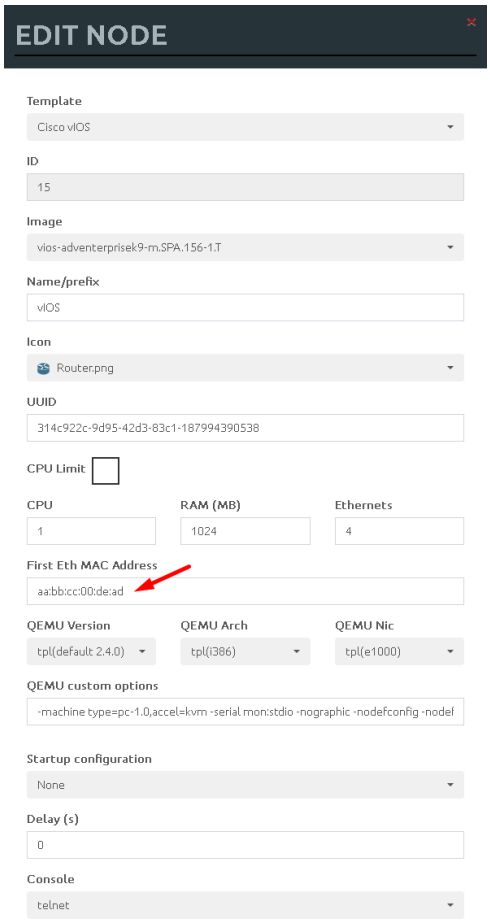

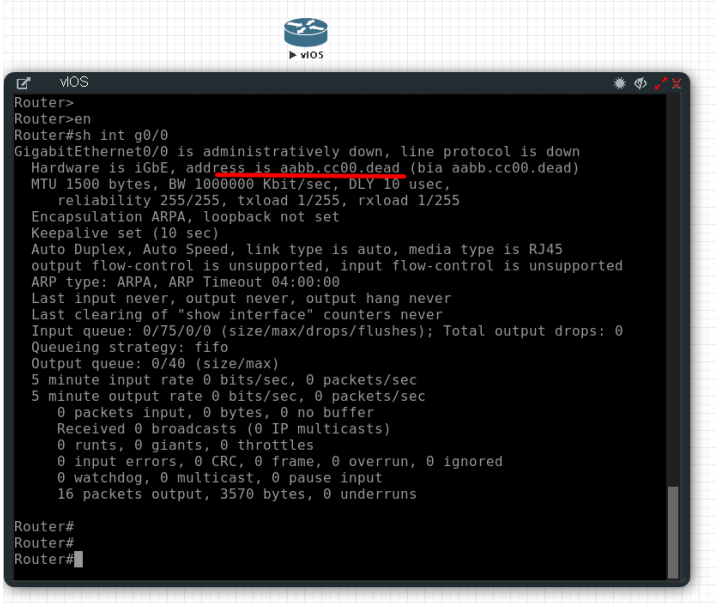

17.5 Windows node settings for Wifi dongle

Using a Wifi USB dongle, you can connect a WiFi-adapter to windows host inside EVE.

Step 1. Connect your USB Wifi dongle to your EVE server.

Step 2. Issue the following command on the EVE CLI to obtain BUS and host numbers which your USB WiFi is connected to:

```
lsusb
```

```
root@eve-ng:~# lsusb
Bus 002 Device 002: ID 0cf3:9271 Atheros Communications, Inc. AR9271 802.11n
Bus 002 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 006 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 005 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 001 Device 003: ID 0424:2514 Standard Microsystems Corp. USB 2.0 Hub
Bus 001 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 004 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
Bus 003 Device 002: ID 04e6:5116 SCM Microsystems, Inc. SCR331-LC1 / SCR3310 Sma
rtCard Reader
Bus 003 Device 001: ID 1d6b:0001 Linux Foundation 1.1 root hub
root@eve-ng:~#
```

Step 3. Add the windows node onto the topology and edit the Qemu line:

Change the type value:

© EVE-NG LTD


type=q35
Add a comma and then the following line:
if=virtio -usb -device usb-host,hostbus=2,hostaddr=2

Where hostbus is your Bus value and hostaddr is your Device ID as seen in the figure above.

Full Windows host qemu line will look like this:

```
-machine type=q35,accel=kvm -cpu
host,+pcid,+kvm_pv_unhalt,+kvm_pv_eoi,hv_spinlocks=0x1fff,hv_vapic,hv
_time,hv_reset,hv_vpindex,hv_runtime,hv_relaxed,hv_synic,hv_stimer -
vga std -usbdevice tablet -boot order=cd -drive
file=/opt/qemu/share/qemu/virtio-win-
drivers.img,index=1,if=floppy,readonly,if=virtio -usb -device usb-
host,hostbus=2,hostaddr=2
```

© EVE-NG LTD

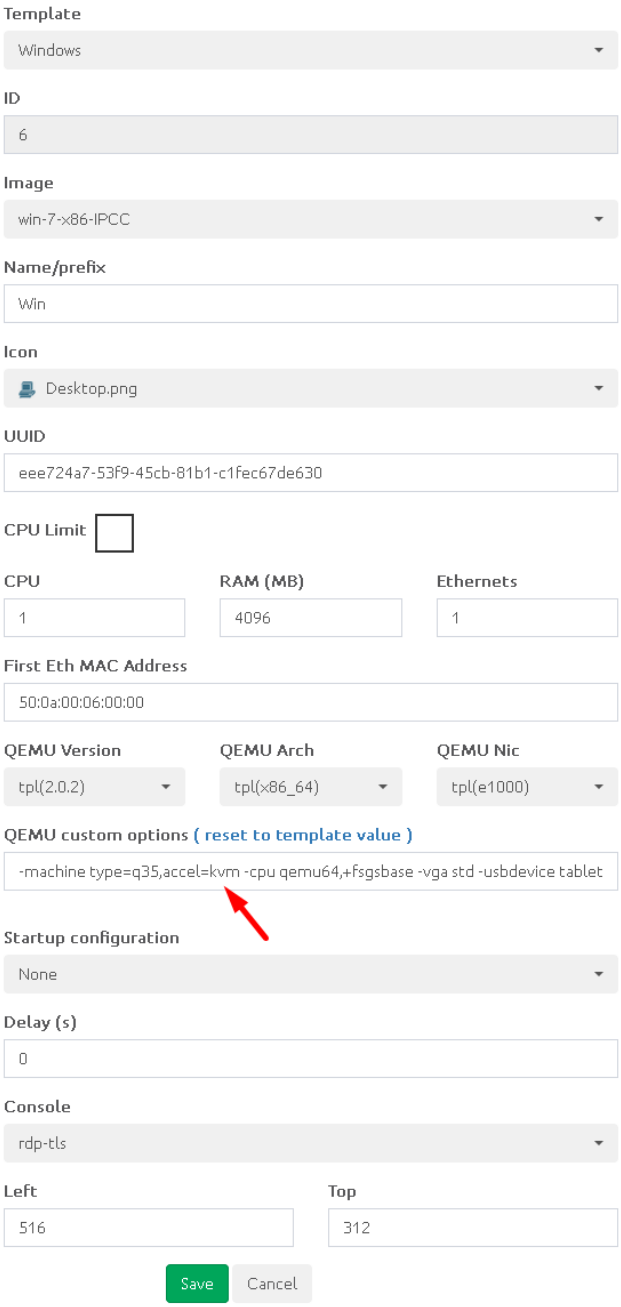
Template
Windows
ID
6
Image
win-7-x86-IPCC
Name/prefix
Win
Icon
Desktop.png
UUID
eee724a7-53f9-45cb-81b1-c1fec67de630
CPU Limit
CPU
RAM (MB)
Ethernets
1
4096
1
First Eth MAC Address
50:0a:00:06:00:00
QEMU Version
QEMU Arch
QEMU Nic
tpl(2.0.2)
tpl(x86_64)
tpl(e1000)
QEMU custom options (reset to template value)
-machine type=q35,accel=kvm -cpu qemu64,+fsgsbase -vga std -usbdevice tablet
Startup configuration
None
Delay (s)
0
Console
rdp-tls
Left
Top
516
312
Save
Cancel

© EVE-NG LTD

18 Images for EVE

Images must be uploaded and prepared before they can be used in labs. The best way to upload images is to use the WinSCP tool for Windows environment or FileZilla for MAC OSX and Linux.

Link to download WinSCP:

https://winscp.net/eng/download.php

Link to download FileZilla:

https://filezilla-project.org/

To access EVE, use SSH protocol (port 22).

Supported images for EVE are stored in the three locations:

- IOL (IOS on Linux), **/opt/unetlab/addons/iol/bin/**
- Dynamips images, **/opt/unetlab/addons/dynamips**
- Qemu images, **/opt/unetlab/addons/qemu**

18.1 Qemu image naming table

⚠ IMPORTANT NOTE: Intel VT-X/EPT must be enabled to run Qemu nodes in EVE. For information on how to enable this option, Refer to section 3: EVE Installation.

The directory names used for QEMU images are very sensitive and must match the table below exactly in order to work.

Ensure your image folder name starts as per the table. After the "-" you can add whatever you like to label the image. We recommend using the version of your image.

Folder name examples:

firepower6-FTD-6.2.1
acs-5.8.1.4

The image hdd inside the folder must be named correctly:
Example: hda.qcow2 or virtioa.qcow2

Full path Example: opt/unetlab/addons/qemu/acs-5.8.1.4/hda.qcow2
The table of proper folder names is provided in our website:

https://www.eve-ng.net/index.php/documentation/qemu-image-namings/

Supported HDD formats and Qemu versions for the EVE images:

HDD Format	HDD name example
lsi([a-z]+).qcow	lsia.qcow
hd([a-z]+).qcow	hda.qcow
virtide([a-z]+).qcow	virtidea.qcow

© EVE-NG LTD

virtio([a-z]+).qcow	virtioa.qcow
scsi([a-z]+).qcow	scsia.qcow
sata([a-z]+).qcow	sataa.qcow

Supported Qemu Versions
1.3.1
2.0.2
2.2.0
2.4.0
2.5.0
2.6.2
2.12.0
3.1.0
4.1.0

18.2 How to prepare images for EVE

How to add EVE-NG images please refer to:

https://www.eve-ng.net/index.php/documentation/howtos/

18.3 How to add custom image template

⚠ IMPORTANT NOTE: Upgrade from EVE version 2.0.5-XX to 2.0.6.-XX automatically will convert old config.php to new yml formats: If you had already custom templates in old php format, these templates will be automatically converted to custom_templates.yml file during the upgrade process!

18.3.1 Templates folder choice

⚠ IMPORTANT NOTE: Starting from EVE-PRO Version 2.0.6-42, EVE installation is autodetecting what kind of CPU manufacturer has your server: Intel or AMD, to choose proper templates set. You can check it manually on EVE cli: example below, showing that EVE has Intel CPU.

```
root@eve-ng:~# lsmod | grep ^kvm_
kvm_intel             212992  74
root@eve-ng:~#
```

- If you have Intel CPU, then your template files are in **"/opt/unetlab/html/templates/intel/"**
- If you have AMD CPU, then your template files are in **"/opt/unetlab/html/templates/amd/"**

18.3.2 Prepare template file


⚠ NOTE: For templates development use templates folder which is matching your EVE server CPU.

Example below will be based for Intel CPU EVE custom image template. Use EVE cli or WinSCP/Filezilla to create template.

Step 1: Navigate to EVE location: /opt/unetlab/html/templates/intel/

Step 2: Choose your most suitable template from which you want to make copy and create own image template. (example: newimage.yml)


© EVE-NG LTD

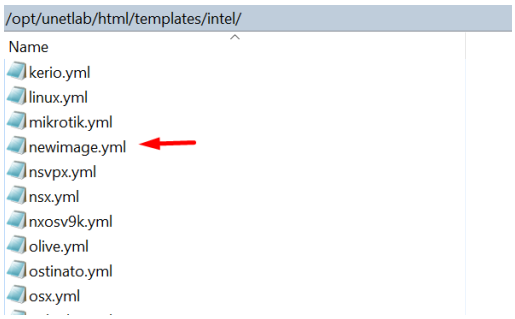

Step 3: Make a copy from source template newimage.yml. Example: Using CLI create template and name it ngips.yml.


```
cp /opt/unetlab/html/templates/intel/newimage.yml /opt/unetlab/html/templates/intel/ngips.yml
```

You can create new template using WinSCP or Filezilla as well.

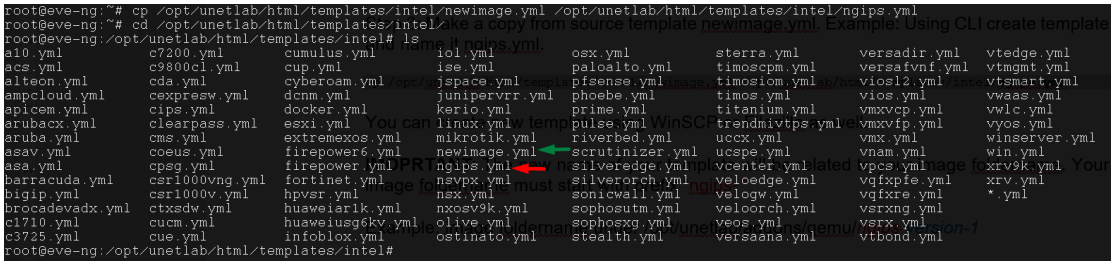

IMPORTANT: The new name of your template will be related to your image foldername. Your image foldername must start with prefix "ngips- "

Example: image foldername under /opt/unetlab/addons/qemu/*ngips-6.5.0-115*

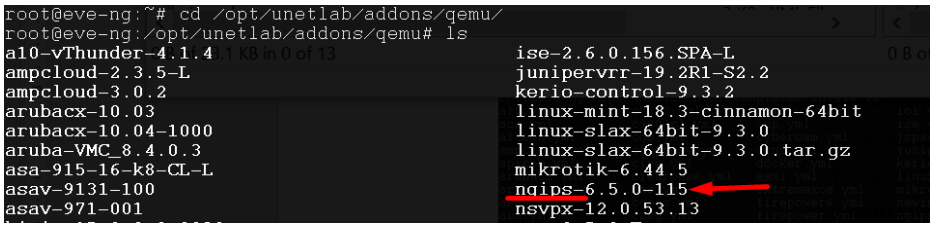

18.3.3 Prepare interface format and name lines

EVE Pro has included option to create various interface names, sequences and numbering. Please refer table below.

Formula	***Template line format example***	***Will produce***
eth_format: <prefix>{<first value for slot: example 1>}<separator>{<first value for port>-<number of port per slot: example 8>}	eth_format: Gi{1}/{0-8}	Gi1/0 Gi1/1 Gi1/2 Gi1/3 Gi1/4 Gi1/5 Gi1/6 Gi1/7

© EVE-NG LTD

		Gi2/0 Gi2/1 ....
eth_format: <prefix>{<first value for slot: example 0>}<separator>{<first value for port>-<number of port per slot: example 4>}	eth_format: Ge{0}/{0-4}	Ge0/0 Ge0/1 Ge0/2 Ge0/3 Ge1/0 Ge1/2 Ge1/3 Ge2/0 Ge2/1 Ge2/2 ....
eth_format: <prefix>{<first value>}	eth_format: Gi{0}	Gi0 Gi1 Gi2 Gi3 ...
eth_format: <prefix>{<first value>}	eth_format: G0/{0}	G0/0 G0/1 G0/2 G0/3 ...
eth_name: <prefix: Interface custom name>	eth_name: - M1 - T1 - T2	M1 T1 T2
eth_name: <prefix: Interface custom name>	eth_name: - MGMT - DATA - TRAFFIC	MGMT DATA TRAFFIC


Combined first named interface following by formatted interfaces Example: We have to set first node interface name “eth0/mgmt” and next following interfaces must start from eth1 and change sequence accordingly. eth1, eth2,….,ethx

As your node first interface will be custom named (eth0/mgmt), therefore in the template “eth_name:” must be added before “eth_format:”

```
eth_name:
- eth0/mgmt
eth_format: eth{1}
```

This adding will produce Node interfaces.

© EVE-NG LTD

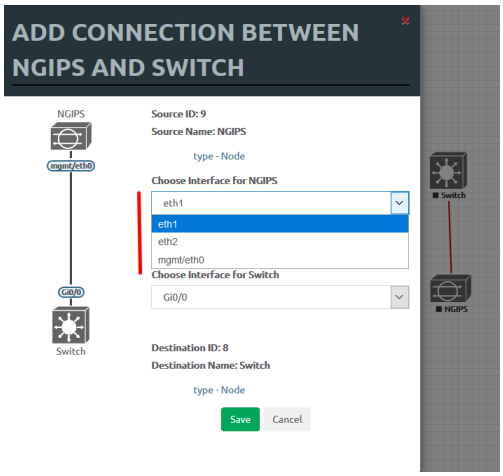

18.3.4 Edit your new template file:


For edit newly created template you can use WinSCP, FileZilla or cli. Example below shows template edit using cli and *nano* editor

```
cd /opt/unetlab/html/templates/intel/
nano ngips.yml
```

Change content, setting for various images can vary depends of vendor requirements. The interface name lines please refer Section: 18.3.2

```
# Copyright (c) 2016, Andrea Dainese
# Copyright (c) 2018, Alain Degreffe
# All rights reserved.
#
# Redistribution and use in source and binary forms, with or without
# modification, are permitted provided that the following conditions are met:
#     * Redistributions of source code must retain the above copyright
#       notice, this list of conditions and the following disclaimer.
#     * Redistributions in binary form must reproduce the above copyright
#       notice, this list of conditions and the following disclaimer in the
#       documentation and/or other materials provided with the distribution.
#     * Neither the name of the UNetLab Ltd nor  the name of EVE-NG Ltd nor the
#       names of its contributors may be used to endorse or promote products
#       derived from this software without specific prior written permission.
#
# THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND
# ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
# WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE
# DISCLAIMED. IN NO EVENT SHALL <COPYRIGHT HOLDER> BE LIABLE FOR ANY
# DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES
# (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
# LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND
# ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
# (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
# SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
---
type: qemu
name: NGIPS <-- Node name on the Topology
description: Cisco FirePower NGIPS <-- Node list name
cpulimit: 1
icon: IPS.png
cpu: 4
ram: 8192
ethernet: 3
eth_name:
- eth0/mgmt
eth_format: eth{1}
```





```
console: vnc
shutdown: 1
qemu_arch: x86_64
qemu_version: 2.4.0
qemu_nic: e1000
qemu_options: -machine type=pc,accel=kvm -serial none -nographic -no-user-config
  -nodefaults -display none -vga std -rtc base=utc -cpu host
...
```

Note: Qemu options in the line may vary per image requirements. Please check manufacturer advice how to run KVM image

18.3.5 Prepare new icon for your template:

Step 1 Use Filezilla or Winscp to copy your custom icon IPS.png (icon filename IPS.png used in ngips.yml)

This icon should be about 30-60 x 30-60 in the png format (switch.png is for example 65 x 33, 8-bit/color RGBA)

Step 2 Copy this new icon into /opt/unetlab/html/images/icons/

18.3.6 Template use

Step 1 Create directory /opt/unetlab/addons/qemu/ngips-6.5.0-115

```
mkdir /opt/unetlab/addons/qemu/ngips-6.5.0-115
```

Step 2 Upload image NGIPS, Refer Section**:** 0

18.4 How to hide unused images in the node list

Please follow section 7.4.1 or 8.1.1.1

© EVE-NG LTD

19 EVE Resources

For additional updated information please follow our web site: https://www.eve-ng.net

How to updates: https://www.eve-ng.net/index.php/documentation/howtos/

How to videos: https://www.eve-ng.net/index.php/documentation/howtos-video/

https://www.eve-ng.net/index.php/documentation/knox-hutchinson-videos/

FAQ: https://www.eve-ng.net/index.php/faq/

Live support chat: https://www.eve-ng.net/index.php/live-helpdesk/

For access to live chat use your Google account or create new chat account.

EVE forum: https://www.eve-ng.net/forum/

To access forum resources, please create a new forum account.

EVE YouTube channel:
https://www.youtube.com/playlist?list=PLF8yvsYkPZQ0myW7aVMZ80k8FU04UUgjV

EVE Professional downloads: https://www.eve-ng.net/index.php/download/

EVE Community version downloads, free: https://www.eve-ng.net/index.php/community/

EVE Supported images: https://www.eve-ng.net/index.php/documentation/supported-images/

© EVE-NG LTD